
powerlogic
SA (Pty) Ltd
innovative power technologies

MK1 Series: Installation Guide

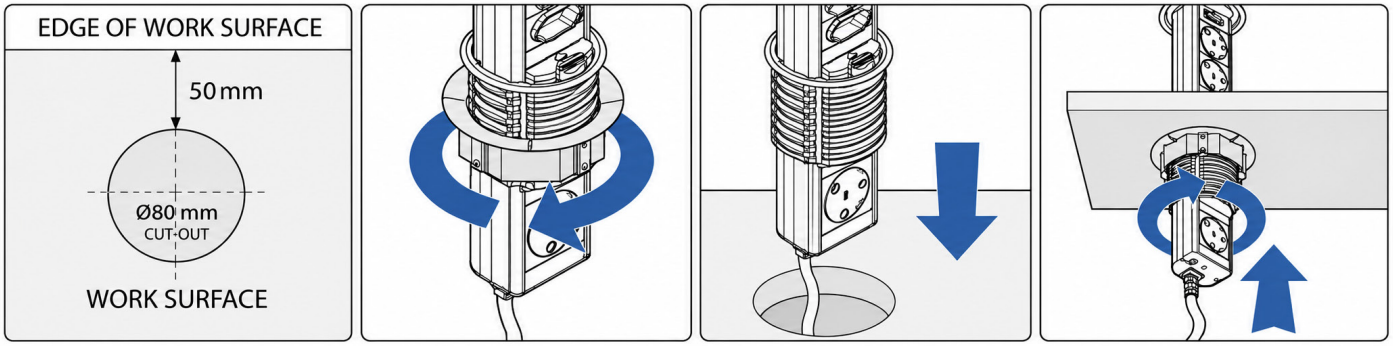

Step 1
Prepare Work Surface
Create an 80 mm diameter cut-out at least 50 mm from the work-surface edge. Ensure sufficient clearance below the work surface and that the power cable can reach the power outlet.

Step 2
Remove Locking Collar
Remove the locking collar by turning it anti-clockwise (when viewed from above). Do not connect the unit to power until installation is complete.

Step 3
Position the Unit
Insert the unit into the pre-cut mounting hole, ensuring the cable is positioned correctly. Align the unit according to your desired orientation before securing.

Step 4
Secure the Unit
Attach the locking collar from underneath the work surface. Turn the collar clockwise until firmly tightened. Ensure the unit remains in the desired position while fastening.

Watch the Installation Video.
Scan the QR code or click the link below to view the installation guide.

https://www.youtube.com/watch?v=wLEPFsSUi0E

Dimensions

Total Height	MK1 & MK1.1 AC: 392 mm MK1.1: 325 mm
Max Width	103 mm
Mounting Hole	Ø80 mm
Weight	1.5 kg

Electrical specifications

Operating Voltage	220–250 V AC @ 50 Hz
Current	15 A
Max Power	3000 W

Warning

- For indoor use only.
- If a malfunction occurs, do not attempt to repair the unit.
- Return the product to the manufacturer for repair.
- Do not insert foreign objects into power outlets or USB ports.
- For work surface mounting only.
- For other options, contact your distributor.


Before Installation


- Ensure the power cable can reach a nearby wall outlet.
- Ensure the installation area is clean and unobstructed.

Due to continual product improvements and upgrades, Powerlogic reserves the right to amend and change products without prior notice. Images are for illustrative purposes only and actual products may vary from those shown. Certain options may be unavailable. Please check with your distributor or with Powerlogic regarding product availability.

powerlogic SA (Pty) Ltd
innovative power technologies

MK1 Series: Use Guide

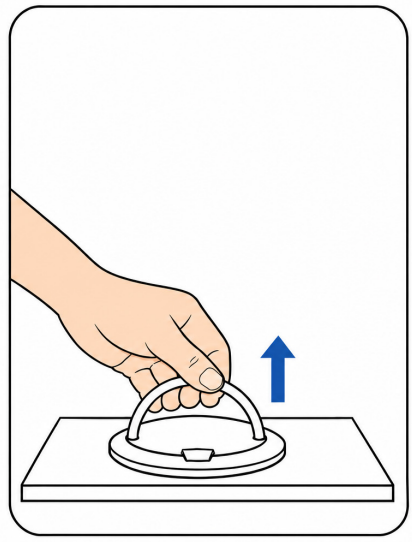

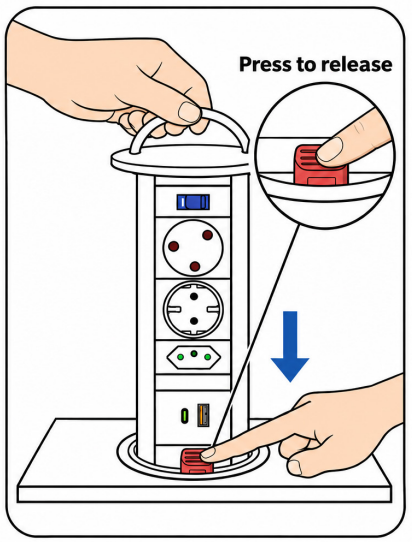

Step 1
Open the unit

1. Lift the fold-flat chrome handle on the lid.
2. Hold the handle and gently pull the unit upwards until it clicks and locks into its raised position.

Step 2
Close the unit

1. Disconnect plugs and cables from the outlets above the work surface.
2. Hold the chrome handle and press the red release button to unlock the unit. Gently lower the unit into the work surface.
3. Fold the handle flat against the lid.

Maintenance and Care

- Disconnect the unit from the power supply before cleaning.
- Clean the unit with a soft, damp cloth and dry immediately.
- Do not use harsh chemical solvents or detergents.
- Do not allow liquids to enter AC sockets or USB ports.
- Regularly check the locking collar and retighten if required.
- Not designed for humid or dusty environments.

Warranty

The MK1 Series carries a 24-month warranty from the date of manufacture against defects in materials or workmanship. Subject to the warranty conditions, products may be repaired or replaced at the manufacturer's sole discretion.

The warranty excludes misuse, abuse, fair wear and tear, and incidental costs arising from repairs or replacements, including downtime, labour and site access charges.

Due to continual product improvements and upgrades, Powerlogic reserves the right to amend and change products without prior notice. Images are for illustrative purposes only and actual products may vary from those shown. Certain options may be unavailable. Please check with your distributor or with Powerlogic regarding product availability.