




GP75-AF-PVC

Anti-Fungal PVC Tubing

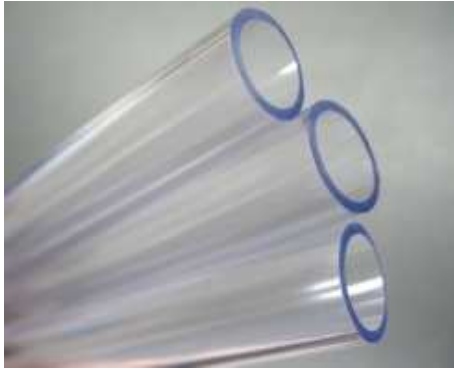

Product Description

Grayline GP75-PVC is an excellent general purpose flexible vinyl tubing. It features excellent elongation properties and good low temperature flexibility. This tubing also contains an anti-fungal additive that makes it suitable for use in wet environments.

*Standard Packaging: Reels or Cut to Customer Specifications.
Standard Color: Clear
Other Colors and Custom Sizes Available Upon Request*

Specifications

- EU Directive 2000/53/EC (ELV)
- EU Directive 2011/65/EU (RoHS2)
- EU Directive 2015/863 (RoHS3)

Features

- Operating Temperature is -40° to 60°C
- Low Temperature Application
- Lead Free
- Anti-Fungal

PROPERTY	TYPICAL VALUE	TEST METHOD
Durometer Hardness, Shore A (15 Seconds)	75	ASTM D2240
Tensile Strength (psi)	2,200	ASTM D412
Elongation (%)	340	ASTM D412
Specific Gravity	1.23	ASTM D792
Brittleness Temperature, Pass °C	-35	ASTM D746

The values listed in this bulletin, to the best of our knowledge, are accurate. They are typical performance results and are not intended to be used as design data. We disclaim all liability in connection with the use of information contained herein or otherwise.