




ADVANCED EXHAUST SOLUTIONS

Wyes
MTU

Application

T-321SS flex hose element can withstand operating temperatures up to 1200°F. Standard floating flange on inlet and outlet connection. High temp black paint finish. Available with 304S and 316SS connections. Optional finishes are available. Hastelloy X and Inconel 625 bellows elements also available.

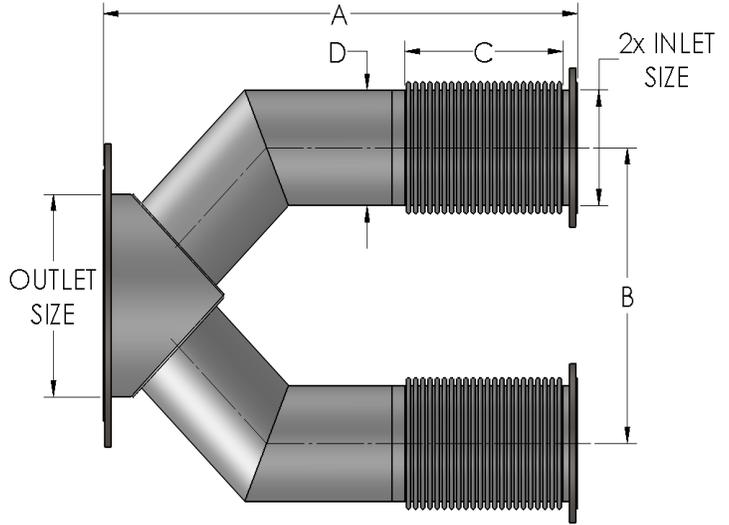

Genset Model	Engine Model	Part Number	Inlet Size	Outlet Size	Overall Height A	Engine Spread B	Nominal Hose Diameter C	Nominal Hose Length D
DS400	8V1600	000-009-920	5.00 ANSI	8.00 ANSI	36.00	60.25	5.00	12.00
DS400	8V1600	000-009-921	5.00 ANSI	10.00 ANSI	36.00	60.25	6.00	12.00
DS500	10V1600	000-009-920	5.00 ANSI	8.00 ANSI	36.00	60.25	5.00	12.00
DS500	10V1600	000-009-921	5.00 ANSI	10.00 ANSI	36.00	60.25	6.00	12.00
DS600	12V1600	000-011-655	6.00 MTU	10.00 ANSI	36.00	60.25	6.00	12.00
DS600	12V1600	000-011-844	6.00 ANSI	10.00 ANSI	36.00	60.25	6.00	12.00
DS800	12V2000	000-009-922	6.00 MTU	10.00 ANSI	36.00	52.69	6.00	12.00
DS800	12V2000	000-009-923	6.00 MTU	12.00 ANSI	36.00	52.69	6.00	12.00
DS1000	16V2000	000-009-923	6.00 MTU	12.00 ANSI	36.00	52.69	6.00	12.00
DS1250	18V2000	000-009-923	6.00 MTU	12.00 ANSI	36.00	52.69	6.00	12.00
DS1750	12V4000	000-009-924	10.00 MTU	16.00 ANSI	36.00	18.50	10.00	12.00
DS1750	12V4000	000-009-925	10.00 MTU	18.00 ANSI	36.00	18.50	10.00	12.00
DS2500	16V4000	000-009-926	10.00 MTU	18.00 ANSI	36.00	37.00	10.00	12.00
DS2500	16V4000	000-009-927	10.00 MTU	20.00 ANSI	36.00	37.00	10.00	12.00
DS3250	20V4000	000-009-928	3x 10.00 MTU	20.00 ANSI	36.00	27.75 - 27.75	10.00	12.00

All dimensions are in inches, all weights are in pounds and are approximate.

