


distributing data and power in demanding environments, particularly for dismounted soldier applications. It seamlessly integrates with the SRM series of products and supports USB. With its scalable design, the Nett Warrior Pico Hub enhances the adaptability of soldiers by providing a flexible solution. It can be utilized across various mission types, such as equipping soldiers with situational awareness or supporting unmanned vehicles.

Mechanical		
Finish	Anodized aluminum body	
Weight	0.294 lbs / 108.6 g (120-130 g)	
Dimension $2.24 \times 2.56 \times 0.87$ inches / $57 \times 65 \times 22$ mr (W x H x D) ($58 \times 72 \times 21$ mm)		
Mounting	Body worn by MOLLE Vest	

Human Interfaces		
Left side	1 x Nett Warrior plug - 6 Pin / Power / Radio 2 x Nett Warrior receptacle - 6 Pin/ EUD/PAN port	
Right side	2 x Nett Warrior receptacle - 6 Pin/ EUD/PAN port 1 x Dial switch - Power ON/OFF	
Back side	MOLLE Dock plate	

Electrical		
Voltage Requirements	10 - 20 Volt DC	
Power Current	Maximum 5 Ampere	

Environmental		
Built to standards	MIL-810 STD	
IP Rating	Built to IP65	

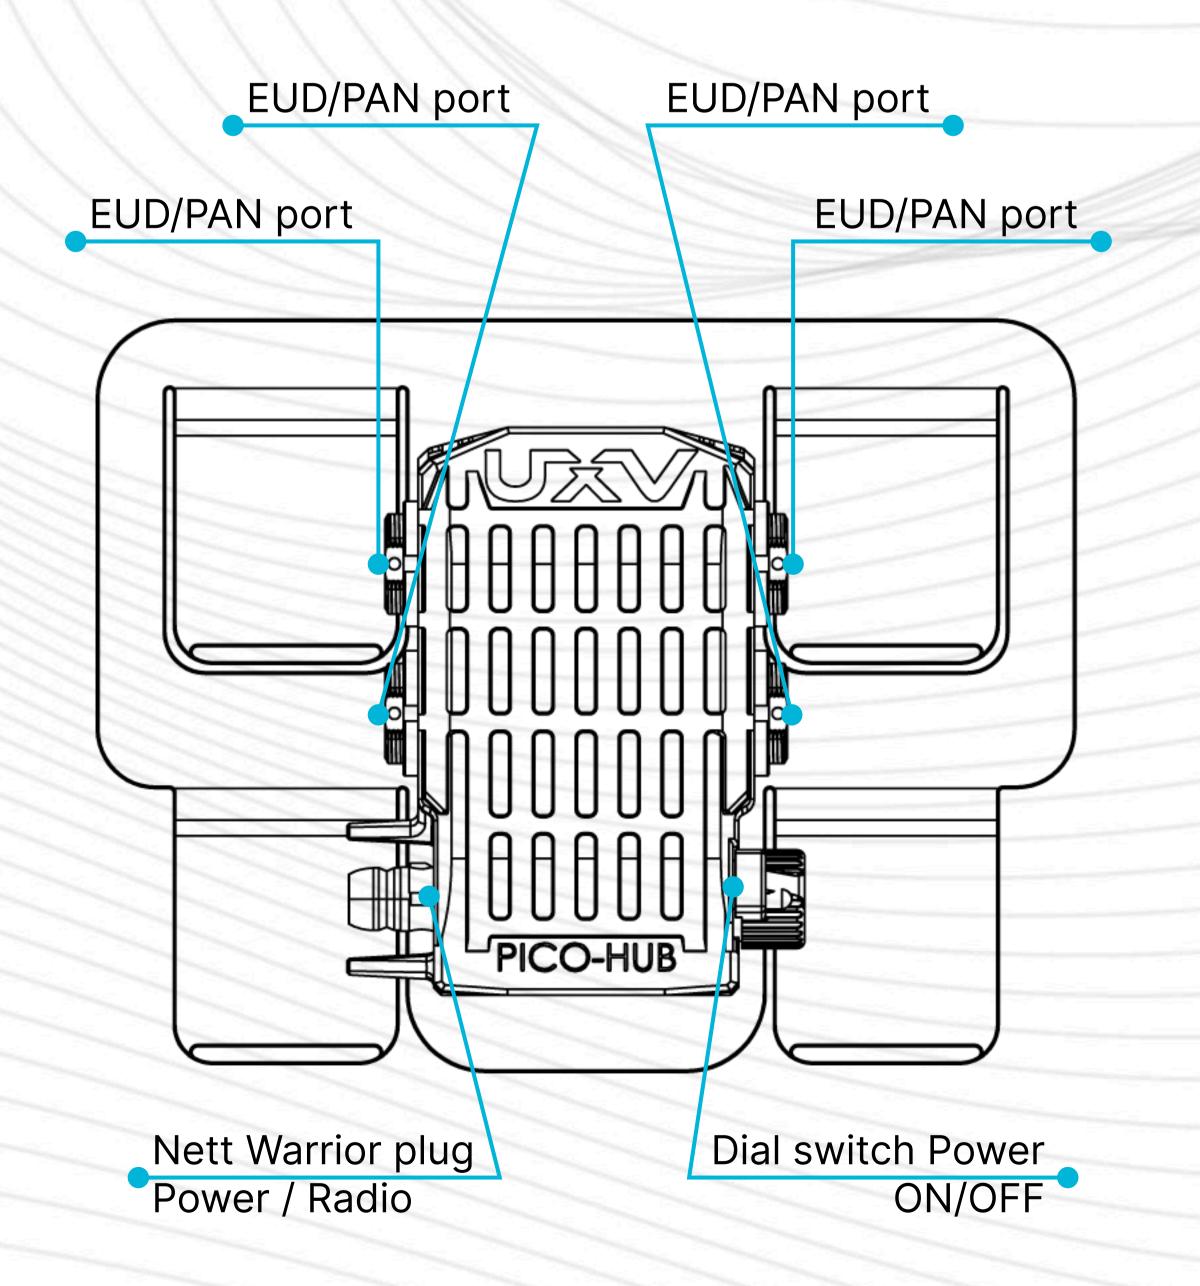

Suggested Accessories		
External Radio Connection	MOLLE Dock	
Extension	Dock Extender	
Cable	NW Plug to NW Receptacle NW Plug to NW Plug NW Plug to free end NW Receptacle to NW Receptacle	

Mounting Options

MOLLE Dock Option 1: Mounting Plate Option 2: Mounting Clip mounting Option 3: Mounting Strap options