
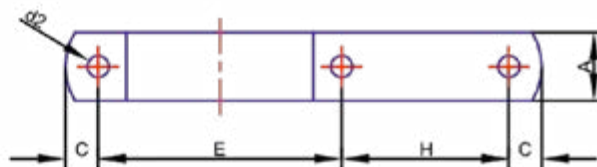


PIJPBEUGEL DIN 3567B TYPE 11 CARCAN DIN 3567B TYPE 11

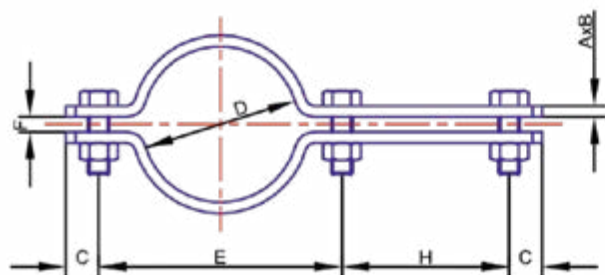

ND/DN	INCH	D	AxB	C	E	F	Bout/Boulon	H	Kg
015	1/2	21,3	30x5	15	56	7	M10x40	46	0,31
020	3/4	26,9	30x5	15	66	7	M10x40	46	0,33
025	1	33,7	30x5	15	72	7	M10x40	46	0,35
032	1 1/4	42,4	30x5	15	82	7	M10x40	46	0,38
040	1 1/2	48,3	30x5	15	88	7	M10x40	46	0,41
050	2	60,3	40x6	18	108	9	M12x45	54	0,78
065	2 1/2	76,1	40x6	18	122	9	M12x45	54	0,89
080	3	88,9	40x6	18	136	9	M12x45	54	0,95
100	4	114,3	50x8	24	178	11	M16x60	70	2,07
125	5	139,7	50x8	24	204	11	M16x60	70	2,26
150	6	168,3	50x8	24	232	11	M16x60	70	2,52
200	8	219,1	50x8	24	284	11	M16x60	70	3,09
250	10	273,0	60x8	30	348	14	M20x70	86	4,52
300	12	323,9	60x8	30	398	14	M20x70	86	5,11
350	14	355,6	60x8	30	444	14	M20x70	86	5,72
400	16	406,4	70x10	36	510	18	M24x70	104	9,63
450	18	457,2	70x10	36	550	18	M24x70	104	10,31
500	20	508,0	70x10	36	614	18	M24x70	104	11,39
600	24	609,6	80x12	45	730	22	M24x70	150	19,87
700	28	711,2	80x12	45	832	22	M30x80	150	22,29
800	32	812,8	100x15	54	954	26	M36x100	150	38,48
1000	40	1016,0	100x15	54	1160	26	M36x100	150	47,06

Bestelvoorbeeld Exemple de commande

11 G 050 / BM

01 [11: type 11

02 [Z: blank staal/acier noir
G: thermisch verzinkt/
galvanisé à chaud
R: 1.4301 (304)
RI: 1.4571 (316Ti)

03 [050: DN/DN 50

04 [BM: incl. bouten en moeren
incl. boulonnerie

**OP VOORRAAD
DE STOCK**