


**Calling all
attention-seekers.**



Holographic Invisible Screen

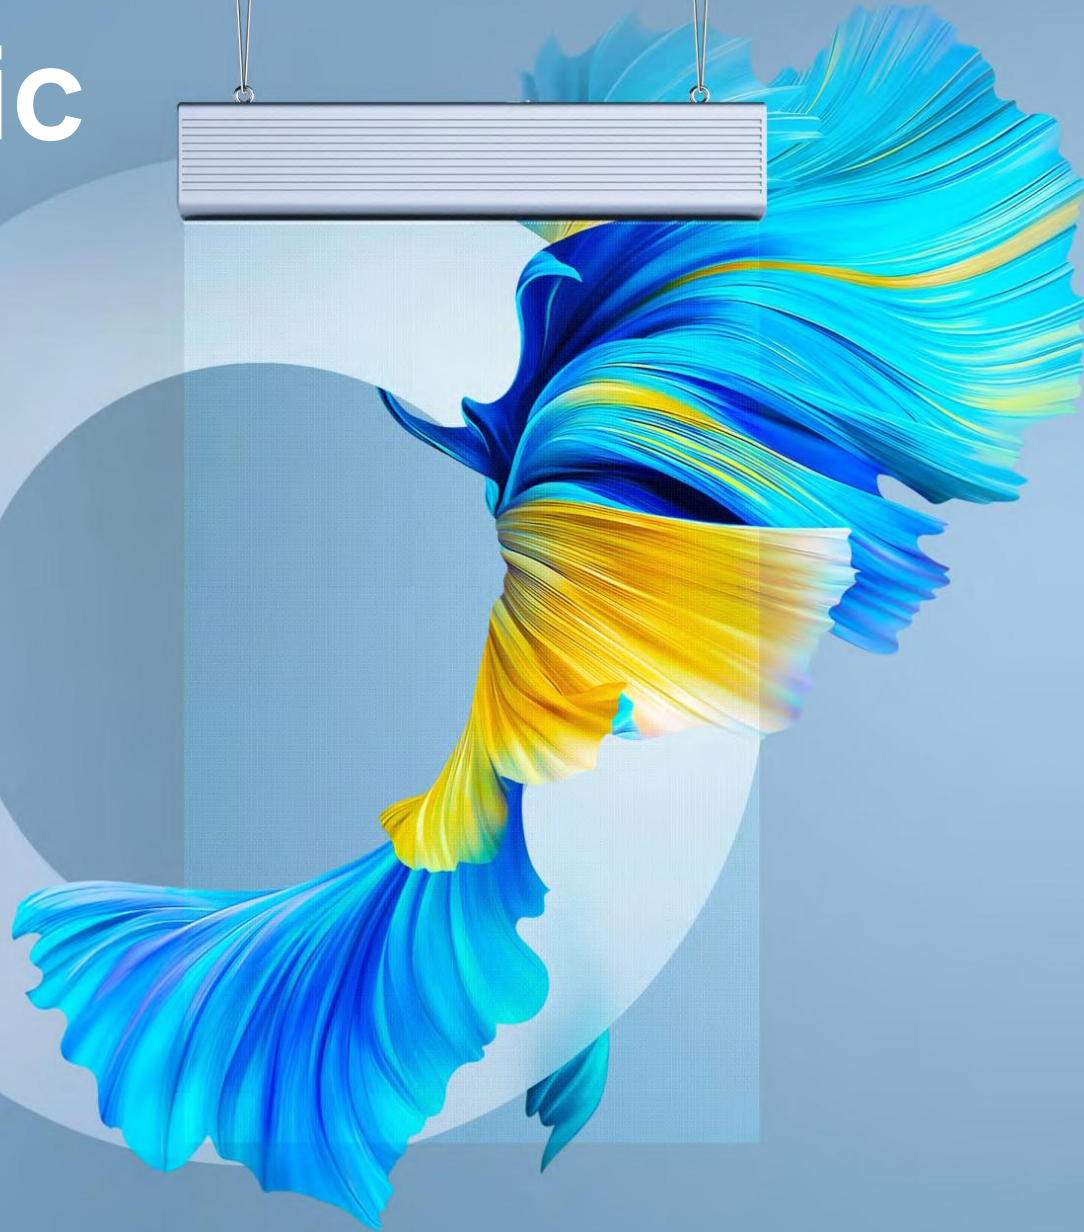

Holographic Invisible Screen



Standard all-in-one machine



Transparent and invisible whole screen



Minimal installation and maintenance




Floating image



Free combined size




High-resolution display quality

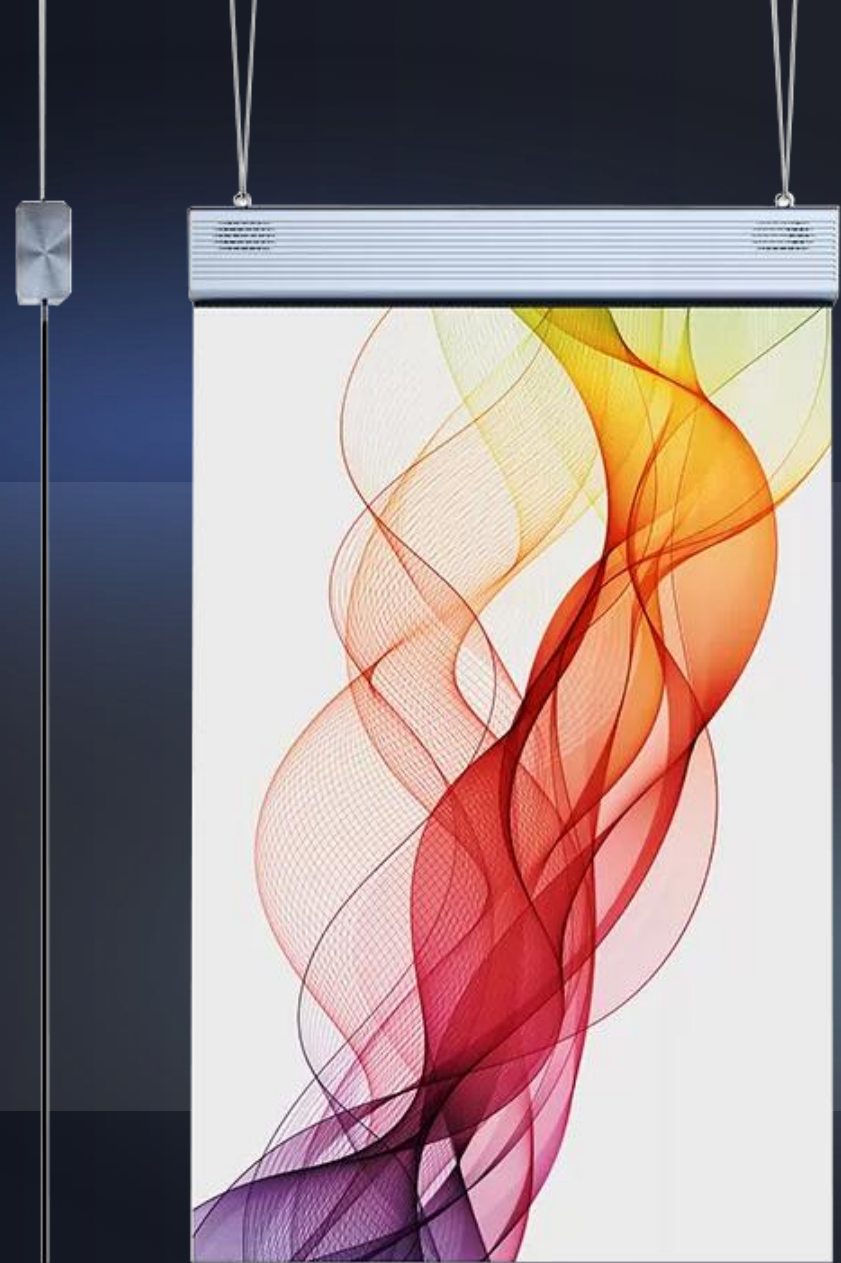



Whole screen transparent and invisible, it does not block any view and light.

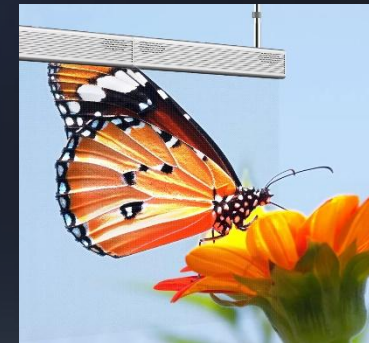


High-resolution display quality, stable video and image, rich and delicate colours.



Floating image, bare-eye AR visual effect, eye-catching and attractive.

Borderless Invisible Poster Screen

Borderless Invisible Poster Screen, is ultra-thin and invisible. It does not block light and view. It is a standard product with easy installation, with built-in sending card and one power supply cable, it supports plug and play.

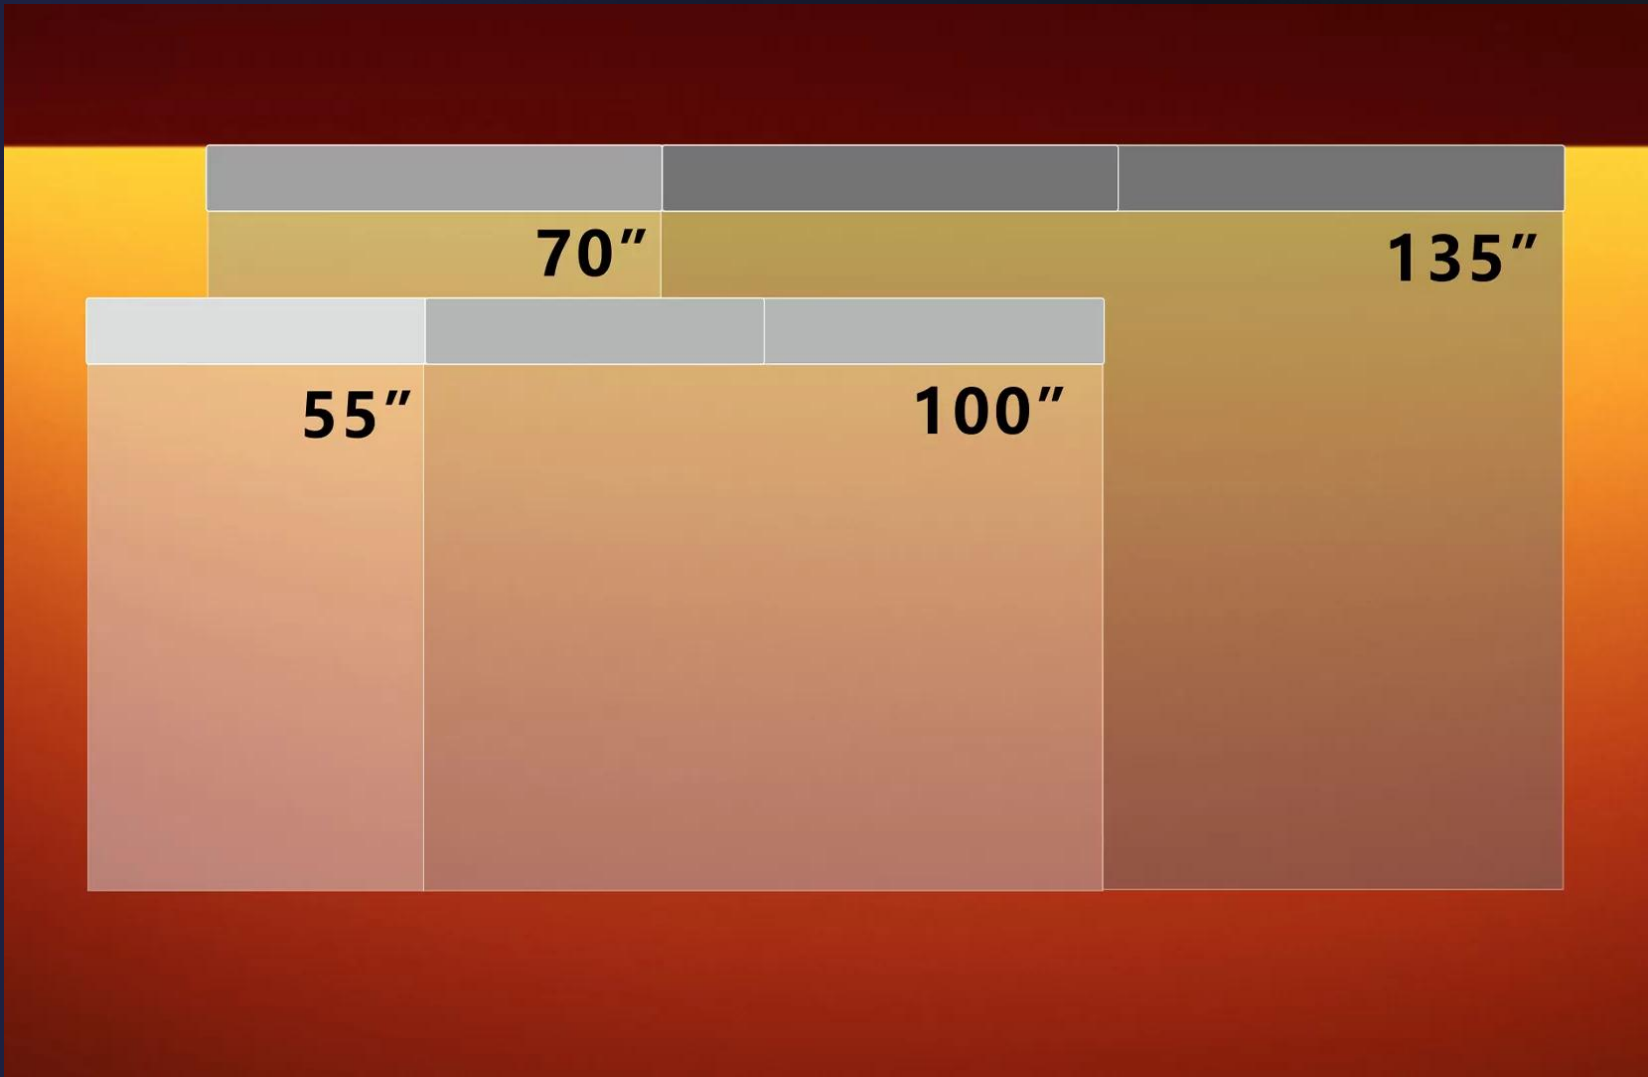

Free combined size, 55", 70", 100", 135", to satisfy different display requirements.




Standard all-in-one machine, built-in sending card, only one power supply cable, plug in and play.

Drawing

Module Dimension

766 * 1324 * 87 mm / 192 * 300 Pixel


External dimintions: 55"

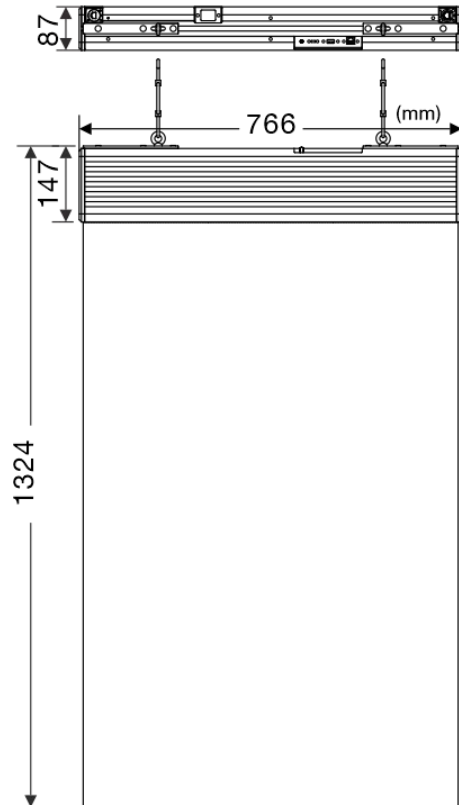

Module Dimension

1016 * 1623 * 87 mm / 256 * 376 Pixel

External dimintions: 70"

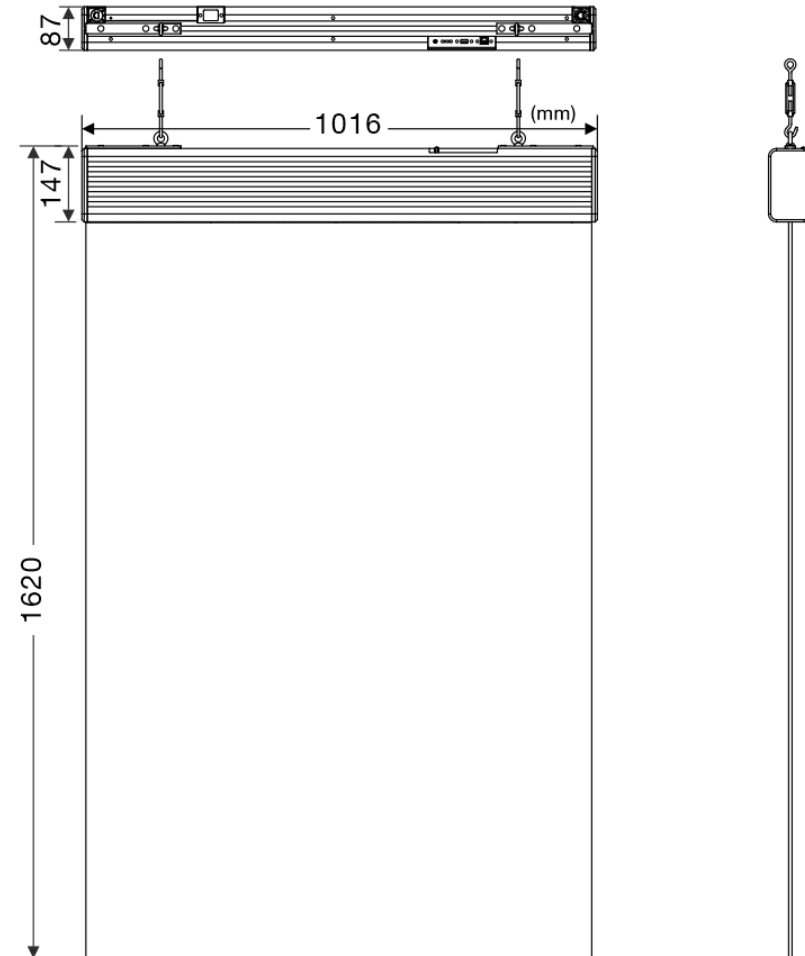

Holographic Invisible Screen

Specifications


Model	P3-55	P3-70
Pixel Pitch (mm) (Horizontal / Vertical)	P3.91 / P3.91	P3.91 / P3.91
Pixel Density(dot/m2)	65536	65536
Transparency Rate	80%	80%
Display Dimension (mm) (w*h)	750 x 1175	1000 x 1500
Profile Dimension (mm) (w*h)	766 x 1324 x 87	1016 x 1623 x 87
Resolution (dot) (w*h)	192 x 300	256 x 376
Brightness(cd/m2)	≥3000	≥2000
Weight(Kg/set)	27	37
Scanning Mode	Static Driving (Single Pixel Single Control)	Static Driving (Single Pixel Single Control)
Encapsulation Type	Light Board & Driving Board Integrated	Light Board & Driving Board Integrated
Lifespan	≥100,000.00 hours	≥100,000.00 hours
Pixel Configuration	16bit	16bit
Maximum Power Consumption (w/set)	660	660
Average Power Consumption (w/set)	240	240


Holographic Invisible Screen | Specifications

Model	P3-55	P3-70
Control System	Asynchronous LED Controller	Asynchronous LED Controller
Input Voltage	AC100~240V 50/60 Hz	AC100~240V 50/60 Hz
Control System	Asynchronous LED Controller	Asynchronous LED Controller
Working Temperature	Temperature -20°C~50°C	Temperature -20°C~50°C
Working Humidity	Humidity: 20% -85%(Without Condensation)	Humidity: 20% -85%(Without Condensation)
Storage Temperature	Temperature -20°C~60°C	Temperature -20°C~60°C
Storage Humidity	Humidity: 10% -85%(Without Condensation)	Humidity: 10% -85%(Without Condensation)
Protection Degree	IP 20	IP 20
Packing size (mm)	L1437*W867*H170	L1736*W867*H170
Installation Environment	Indoor	Indoor
Packing Way	Pearl Cotton + Carton/Flight Case	Pearl Cotton + Carton/Flight Case

**We look forward to
working with you soon.**



1300 125 635 

sales@onq.digital 

Level 10, 650 Chapel Street, South Yarra VIC 3141 