

GARRY **WHEELS**

DESIGNED AND PRODUCED BY **GARRY**



MAXIMUM PAYLOAD OF EACH BOARD
FOR IDEAL OPERATION: 300 kg / 660 lbs

Before using **GARRY WHEELS**, for your own safety and the safety of others, make sure that all parts are in place and there are no loose screws.

Check what should move moves,
and what should not move does not move.



If you are not satisfied
with payload capacity,
contact us.

SPECIFICATIONS



MADE OF HIGH-GRADE ALUMINUM
AND STAINLESS STEEL



GLASS BEAD BLASTED
BLACK ANODIZED SURFACE FINISH



COMPATIBLE WITH ALL KINDS OF
INDUSTRY-STANDARD DOLLIES



DOLLY WHEEL SIZE RANGE
178 - 275 mm / 7 - 10.82 inch



WHEEL HARDNESS
60° Shore A



COMPATIBLE TRACK GAUGE
60 - 69 cm / 23.62 - 27.16"



LIFTING DISTANCE FROM TRACK
approx. 9 cm / 3.5"



DIMENSIONS WITHOUT SBW243012
84 x 27 x 14 cm / 33 x 11 x 6"



MAXIMUM PAYLOAD OF EACH BOARD
300 kg / 660 lbs



WEIGHT OF EACH BOARD
7 kg / 15.4 lbs




If you need more specific details
about GARRY WHEELS,
contact us.



No matter what size your dolly wheel is, you can always make a three-point contact between the wheel and the GARRY WHEELS with the **adjustable wheel clamps** which you can adjust without any tools.

If the adjustable clamp is used as intended, it should not get stuck. If so, and you are not able to tighten or loosen it, make sure the dolly is in place or use **5mm hex key**.

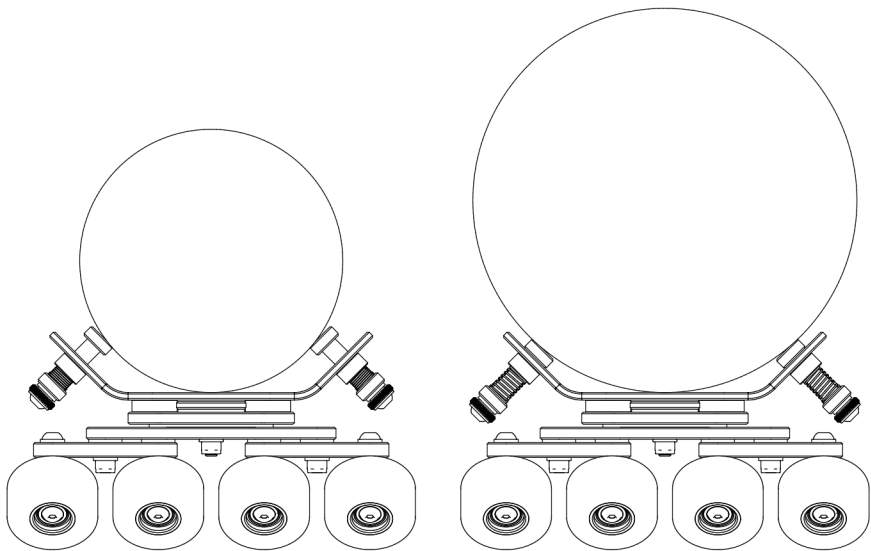

WHEEL DIAMETER FOR PERFECT FIT: 178 - 275 mm / 7 - 10.82 inch




If your dolly has a wheel size
which does not fit on the GARRY WHEELS
we will find a solution for you!

For dollies like Elemack, Panther, Movietech, GFM etc., where you find two track wheels between studio wheels, you are not able to place the dolly onto the GARRY WHEELS without an **additional plate**.

For the perfect fit, we recommend to loosen all the adjustable screws and attach SBW243012 additional plates into the tray.

net weight of SBW243012: **0,5 kg / 1.2 lbs**

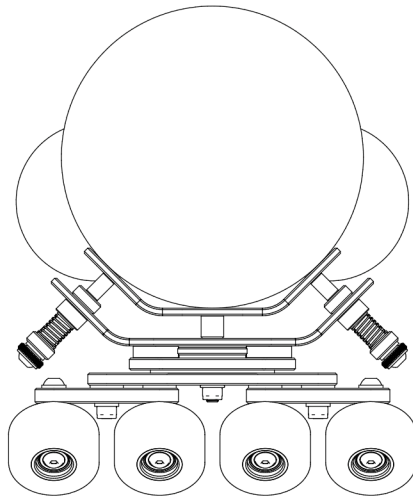


SBW243012

If you have a dolly that does not fit on the
GARRY WHEELS with this additional plate,
let us know!




Each wheel set is equipped with stop screws, so its 2x2 units won't turn under the main plate so you can put the **GARRY WHEELS** on straight or curved dolly track without adjusting each set of wheels.

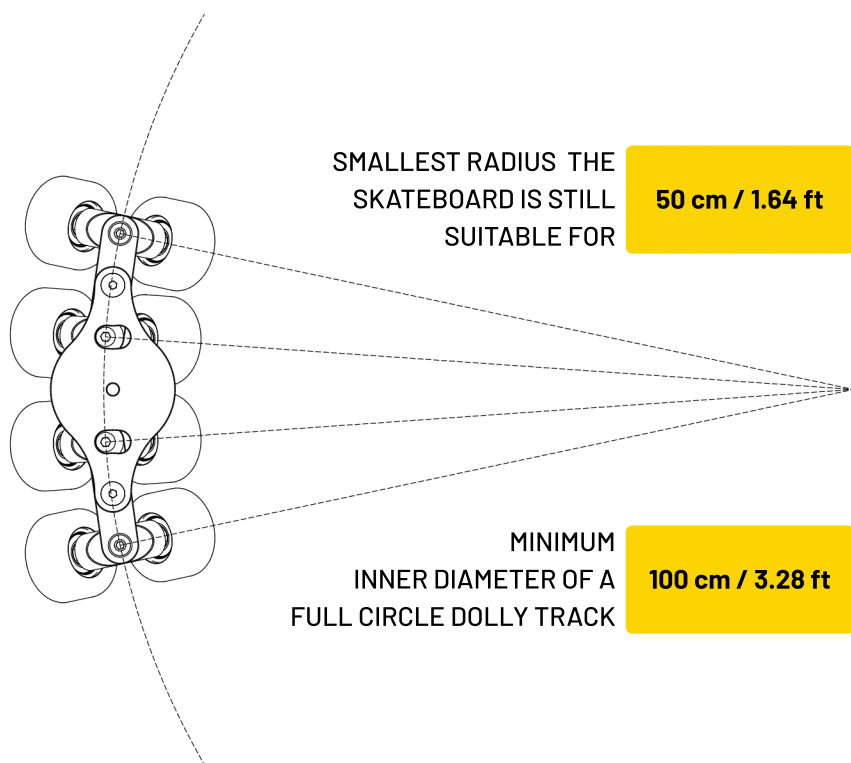


If you want to ride **GARRY WHEELS** on a curved dolly track smaller radius than 50 cm / 1.64 ft, let us know!

On one side the wheel set can slide sideways thus you are able to push your dolly from straight to curved track or you can use it on a full circle. However, due to its size, there are some limitations regarding to the wheelbase of the dolly in respect of the radius of the curved track or diameter of full circle.


GARRY WHEELS is not compatible with Hybrid or longer dollies on 10' diameter or smaller dolly tracks.

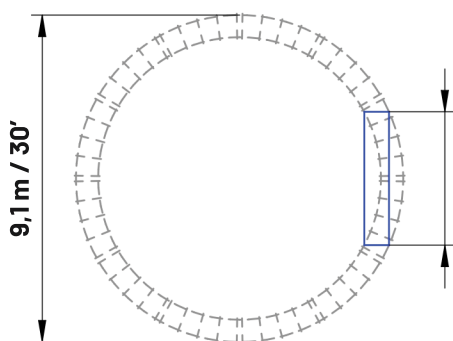

TRACK DIAMETER: **9,1 m / 30'**
MAX. WHEELBASE: **372 cm / 146"**

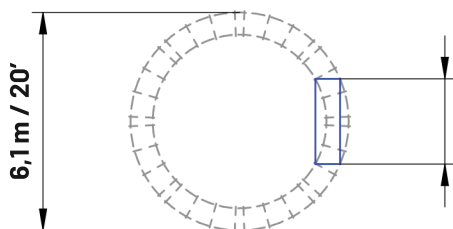

TRACK DIAMETER: **6,1 m / 20'**
MAX. WHEELBASE: **238 cm / 93"**

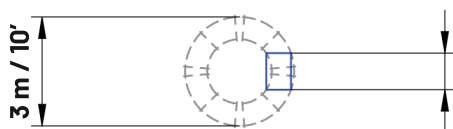

TRACK DIAMETER: **3 m / 10'**
MAX. WHEELBASE: **102 cm / 40"**

If you are uncertain about your
wheelbase - dolly track diameter ratio,
scan this and contact us!



DISTRIBUTED
BY | **PANTHER** 
PANTHER



SCAN THIS FOR MORE
INFORMATION OR VISIT
WWW.GARRYWHEELS.COM