

RANGE EXTENDER

QUICK GUIDE




Range Extender in Transport Position.



Unfold the arm and tighten the marked screw.




Flip Quick Lock and push the sledge upwards until it locks in.

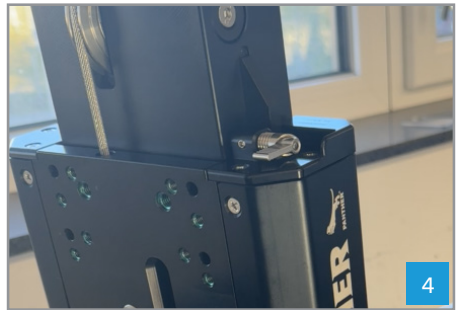

The Quick Lock is now locked in place, and the sledge is secured.



Insert the marked bolt into the hole, but not completely. **IMPORTANT: The column must be fully retracted.**

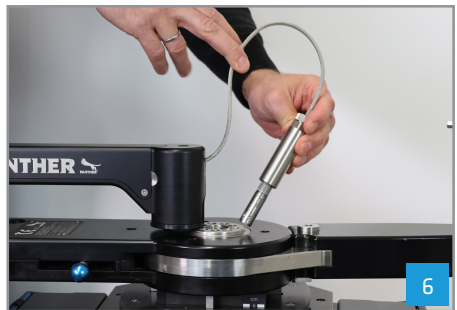

Attach Ball locking pin with rope to the dolly's lifting drive.

Installation

QUICK GUIDE



Now push the Range Extender completely in the specified direction.




Push the rope to the side at the front opening. Tighten the screw shown clockwise (8mm Allen Key).



Insert safety cover.



Now hold the sledge securely and open the Quick Lock.

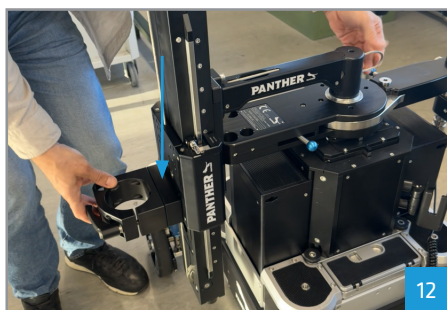

Now slowly lower the sledge, making sure the steel cable doesn't bent.