


TL-2000C G.hn COAX SFP: Web Configuration Quick Guide

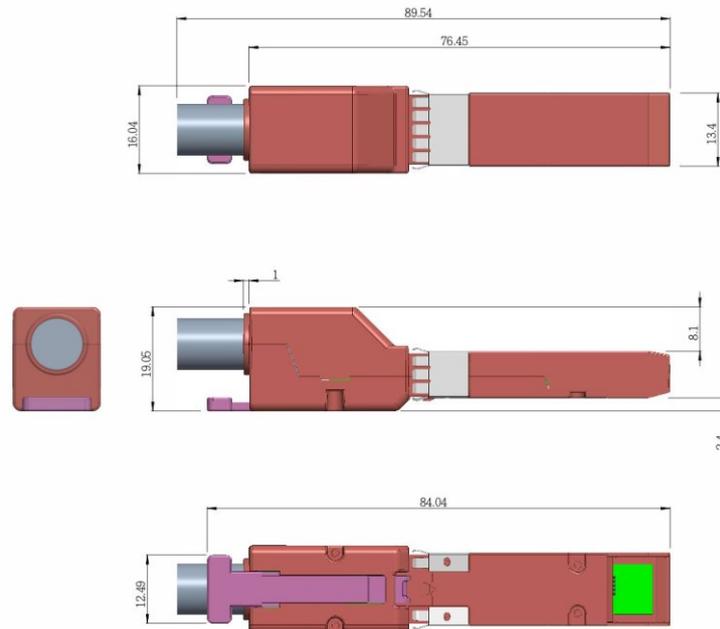

Before using the TL-2000C Coax SFP configuration web page, please insert SFP module into the L2 switch and use ethernet cable connecting between L2 switch and gateway router. Then use the PC that is connected to router to access SFP web page.

1. As IPv4 setting of TL-2000C SFP is DHCP mode, the IP address can be obtained through gateway router settings page.
2. In PC web browser, key in the IP address of TL-2000C SFP into the browser command line and login with the password "paterna"

Authentication

This unit is password protected. Please enter the correct password to access the web pages

• Password

Password: paterna

Setup G.hn network with L2 Switch and COAX SFP

Please follow below steps:

1. Power on the L2 Switch and wait till it completes bootup.
2. Insert G.hn Coax SFP into the L2 switch.
3. Use a coax cable to connect the G.hn bridge to the SFP that is inserted into the switch.

For Sales

North America:
sales@transliteglobal.com

Asia:
sales@translite.co.in

Rest Of The World:
sales@transliteglobal.com

For Support

North America :
support@transliteglobal.com

Asia:
support@translite.co.in

Rest Of The World:
support@transliteglobal.com