



CP SPECTRUM 2U


Li Battery Storage for
Telecom

((.))

Telecommunications

Maintain seamless communication services with reliable energy storage that safeguards against power interruptions, ensuring uninterrupted connectivity for critical infrastructure.

SYSTEM INFRASTRUCTURE

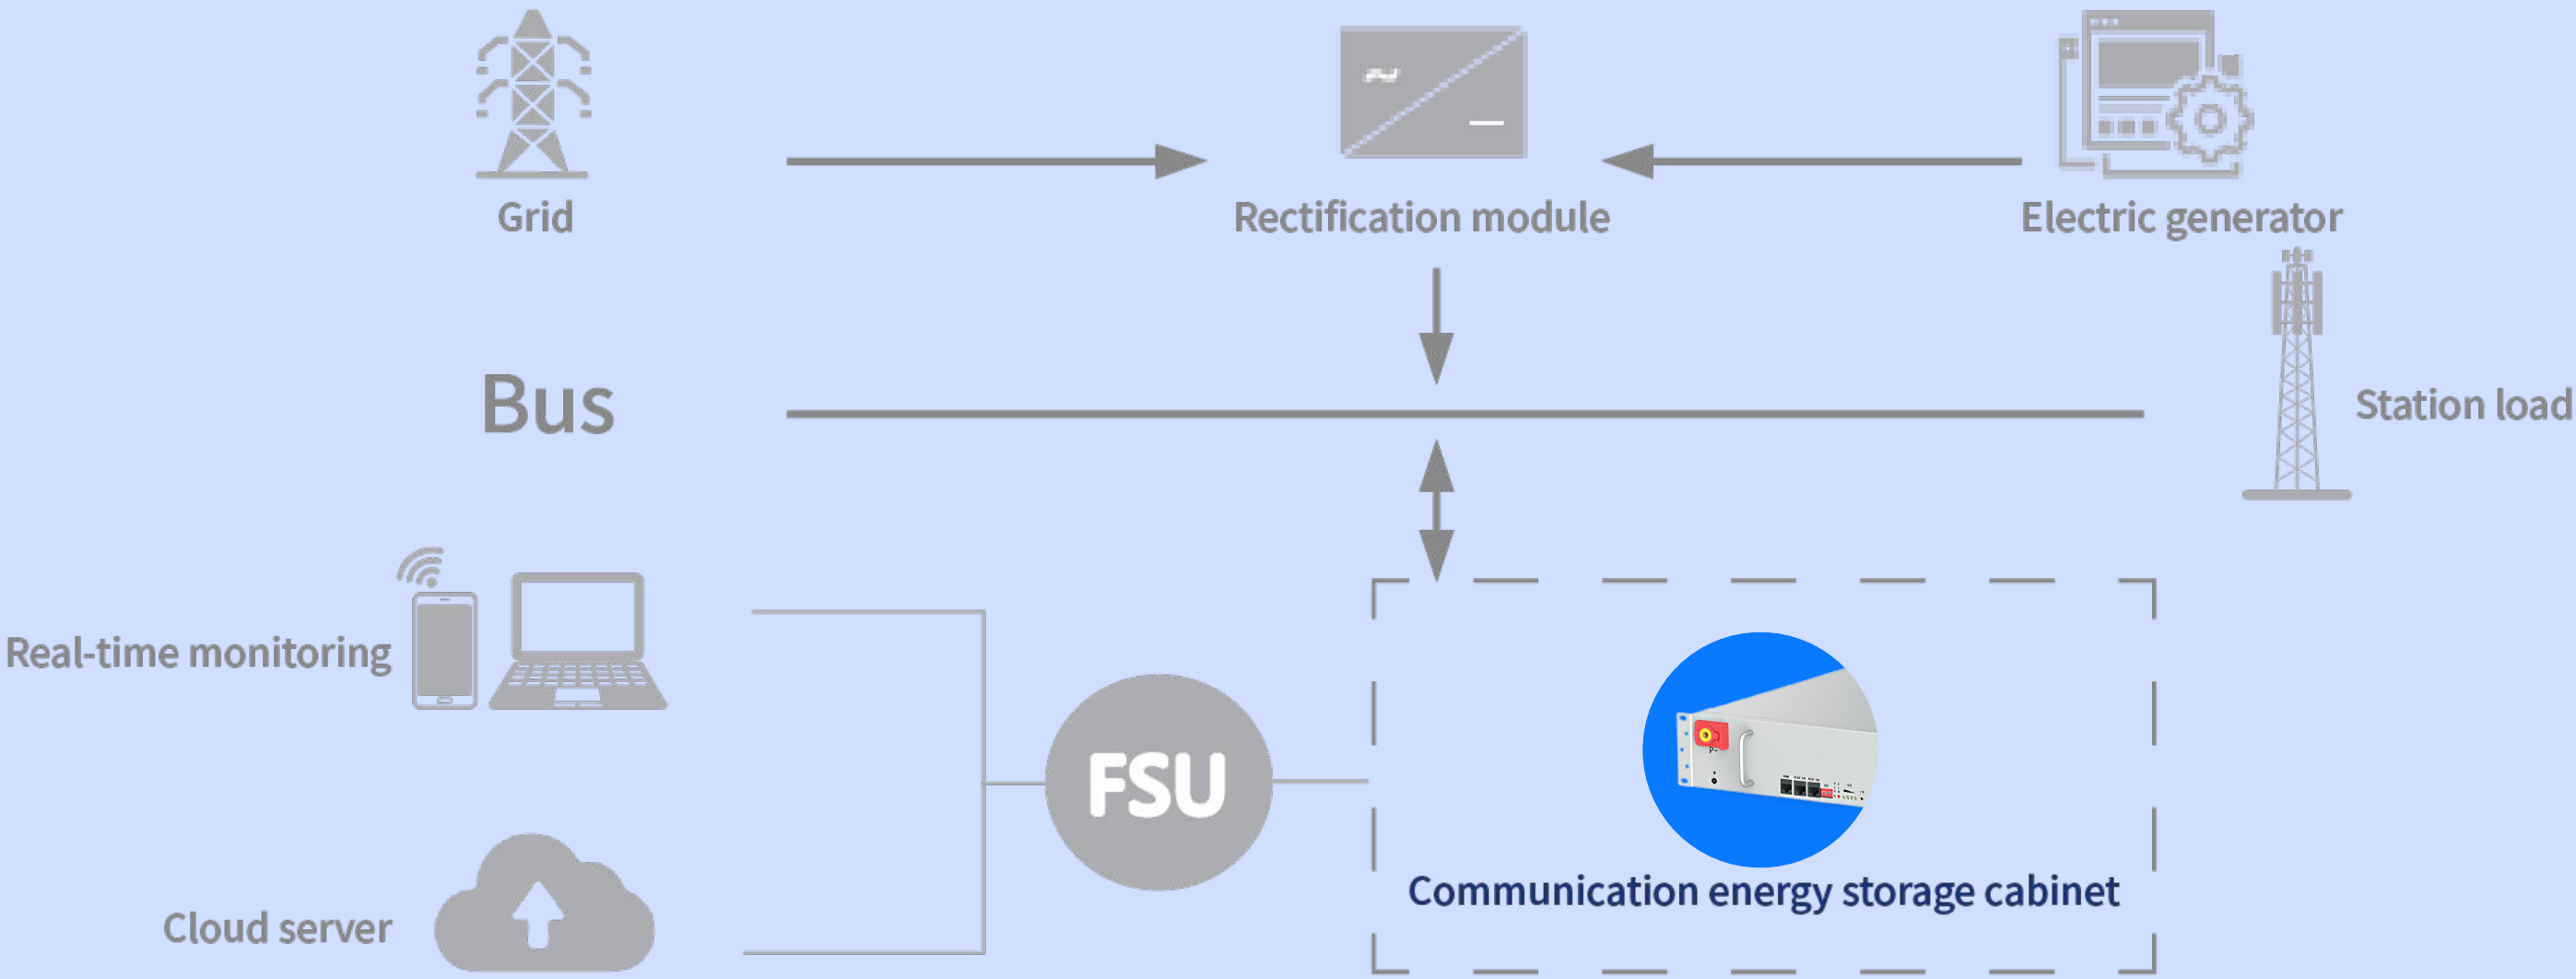

M O D E L

EMBEDDED SERIES-2U
CF4820T

EMBEDDED SERIES-2U
CF4850T

EMBEDDED SERIES-2U
CF48100T

BASIC PARAMETERS

Connection Method	1P15S / 1P16S	1P15S / 1P16S	1P15S
Rated Energy	960Wh / 1024Wh	2400Wh / 2560Wh	4800Wh
Rated Capacity	20Ah	50Ah	100Ah
Rated Voltage	48V / 51.2V	48V / 51.2V	48V
Voltage Range	42~52.5V / 43.2~56.8V	42~52.5V / 43.2~56.8V	42~52.5V
Charging Current	10A	25A	50A
Discharge Current	20A	50A	100A
Operating Temperature	charge:0~50°C; discharge:-20~55° °C;Storage:-30~45°C	charge:0~50°C; discharge:-20~55° °C;Storage:-30~45°C	charge:-10-50 °C; discharge:-30~70°C;Storage:-30~ 45°C
Self-discharging Rate	≤3%(0~30°C/3 months)	≤3%(0~30°C/3 months)	≤3%(0~30°C/3months)
Size	440*200*88mm	440*390*88mm	440*525*88mm(19inch) 492*525*88mm(2linch)
Weight	12Kg / 12.3Kg	24Kg / 25Kg	42Kg(19inch) 42.5Kg(2linch)

EXTRA DETAILS

Communication interface	RS485/RS232/CAN
Charging current Limit function	With the function of automatically entering the current-limiting charging mode when detecting low voltage, high voltage, low temperature, high temperature, poor consistency, or charging over-current protection in the battery cells.
Voltage acquisition accuracy	0~5V,Detection accuracy≤10mV;0~60V Detection accuracy≤0.5%
Current acquisition accuracy	Detection accuracy≤1%(0.5C charging/discharging)
Anti-theft function	Software anti-theft, communication anti-theft, gyroscope anti-theft, and other functions are optional.

GOT QUESTIONS?
GET IN TOUCH WITH US

Authorised Representative of Cospowers Europe
Dan-Tech Energy GmbH