

CP ECHO AIO

All In One Battery Storage
for Telecom




(··)

Telecommunications

Maintain seamless communication services with reliable energy storage that safeguards against power interruptions, ensuring uninterrupted connectivity for critical infrastructure.

SYSTEM INFRASTRUCTURE

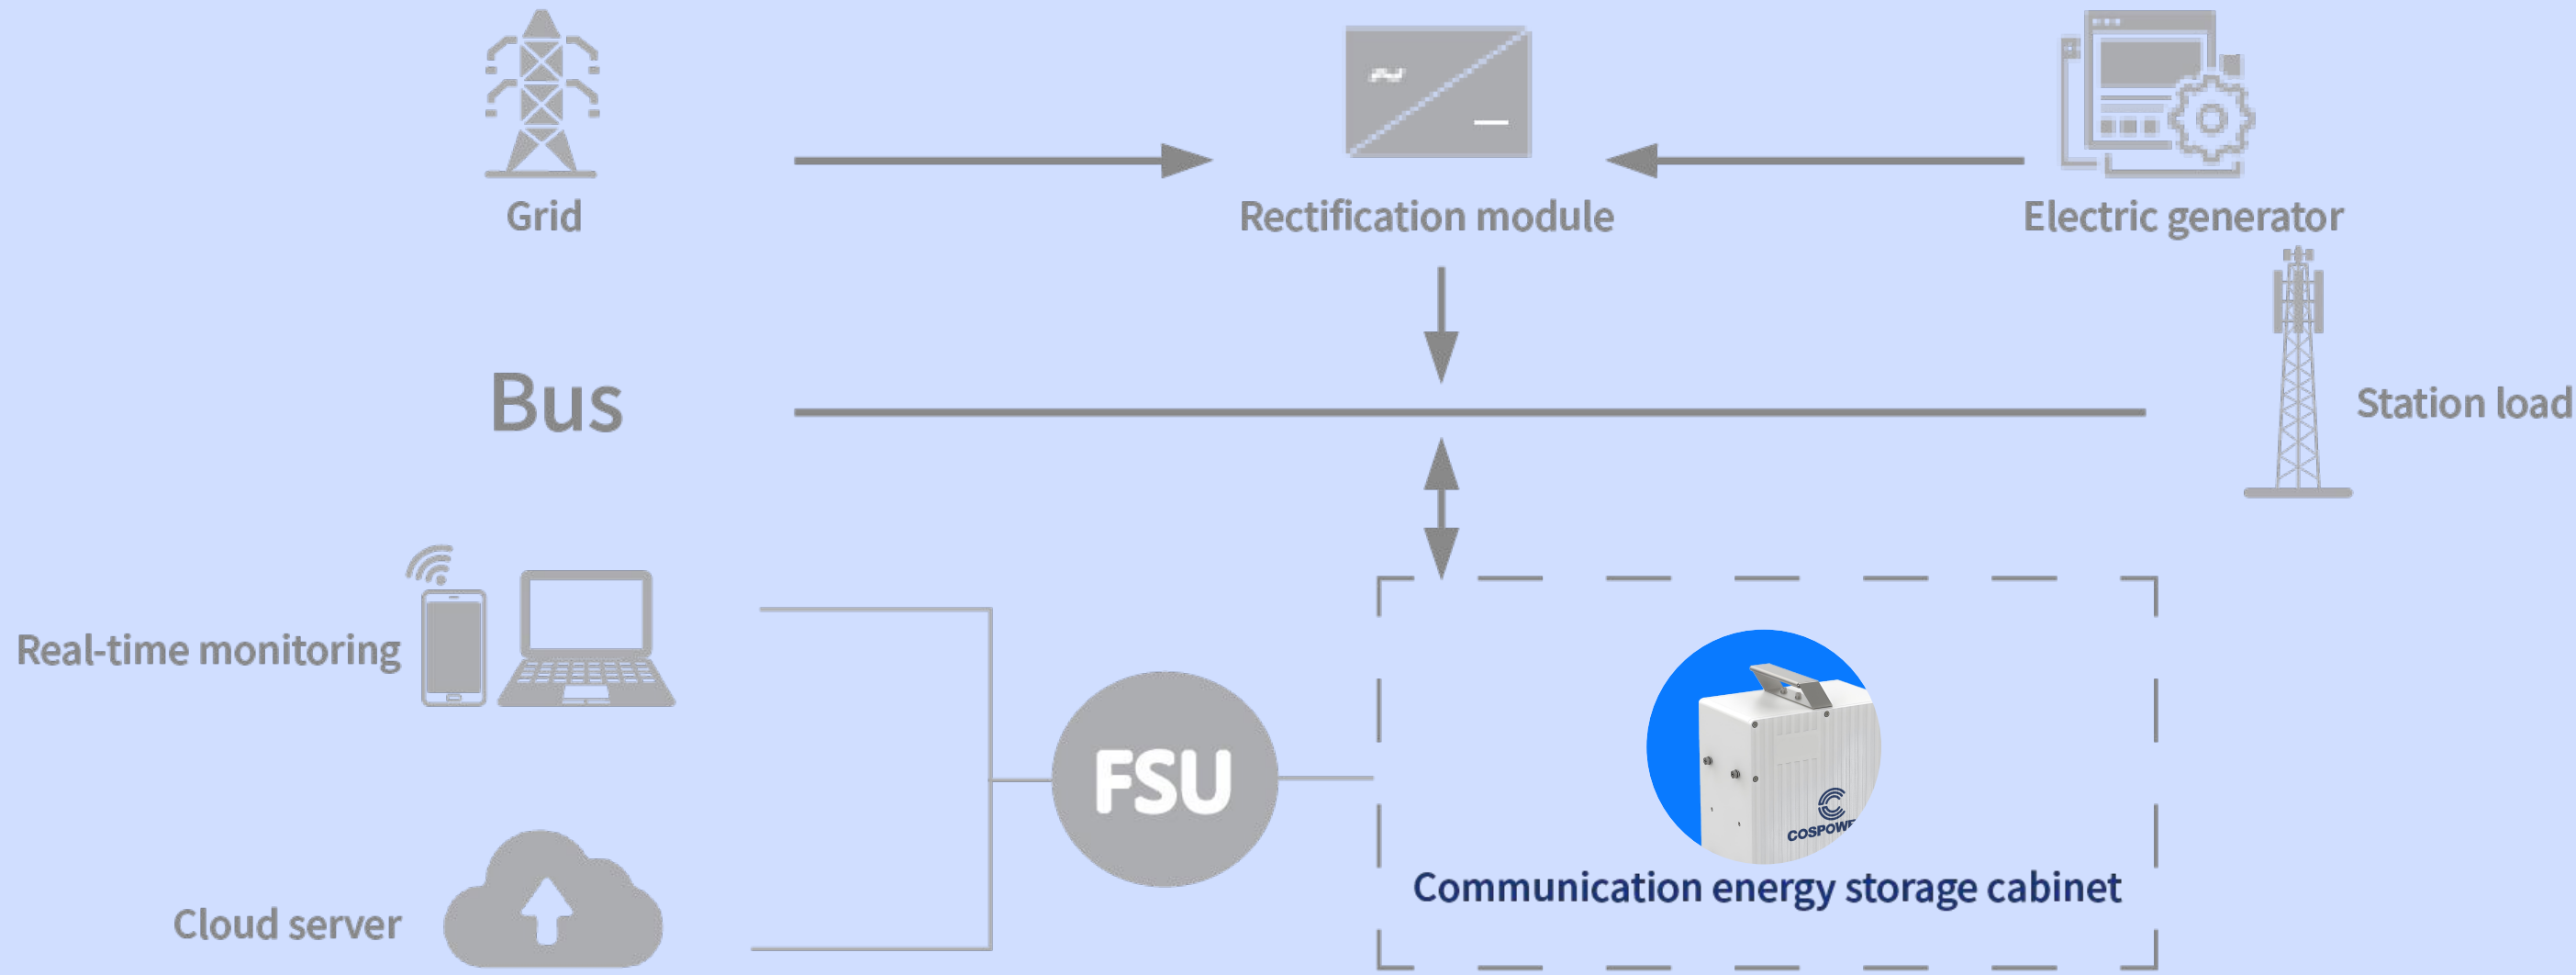

MODEL

CF4820Y

CF4850Y

BASIC PARAMETERS

Connection Method	1P15S / 1P16S	1P15S / 1P16S
Rated Energy	960Wh / 1024Wh	2400Wh / 2560Wh
Rated Capacity	20Ah	50Ah
Rated Voltage	48V / 51.2V	48V / 51.2V
Voltage Range	42~52.5V / 43.2~56.8V	42~52.5V / 43.2~56.8V
Charging Current	20A	50A
Discharge Current	20A	50A
Operating Temperature	charge:0~50°C; discharge:-20~55°C;Storage:-30~45°C	charge:-10-50 °C; discharge:-30~70°C;Storage:-30~45°C
Self-discharging Rate	≤3%(0~30°C/3 months)	≤3%(0~30°C/3months)
Size	400*120*290mm	420*300*190mm
Weight	13.5Kg / 14Kg	29Kg / 30Kg
Life Span	3000x at 80% DOD, 0.5C/0.5C	3000x at 80% DOD, 0.5C/0.5C

EXTRA DETAILS

Communication interface	RS485/RS232/CAN
Charging current Limit function	With the function of automatically entering the current-limiting charging mode when detecting low voltage, high voltage, low temperature, high temperature, poor consistency, or charging over-current protection in the battery cells.
Voltage acquisition accuracy	0~5V,Detection accuracy≤10mV;0~60V Detection accuracy≤0.5%
Current acquisition accuracy	Detection accuracy≤1%(0.5C charging/discharging)
Anti-theft function	Software anti-theft, communication anti-theft, gyroscope anti-theft, and other functions are optional.

GOT QUESTIONS?
GET IN TOUCH WITH US

Authorised Representative of Cospowers Europe
Dan-Tech Energy GmbH