
# Weighted Butterfly Valve

Automatic Weighted Butterfly Valve
Revision "1" 5/23/2025 S-0035
Approval Authority: Production Mgr.

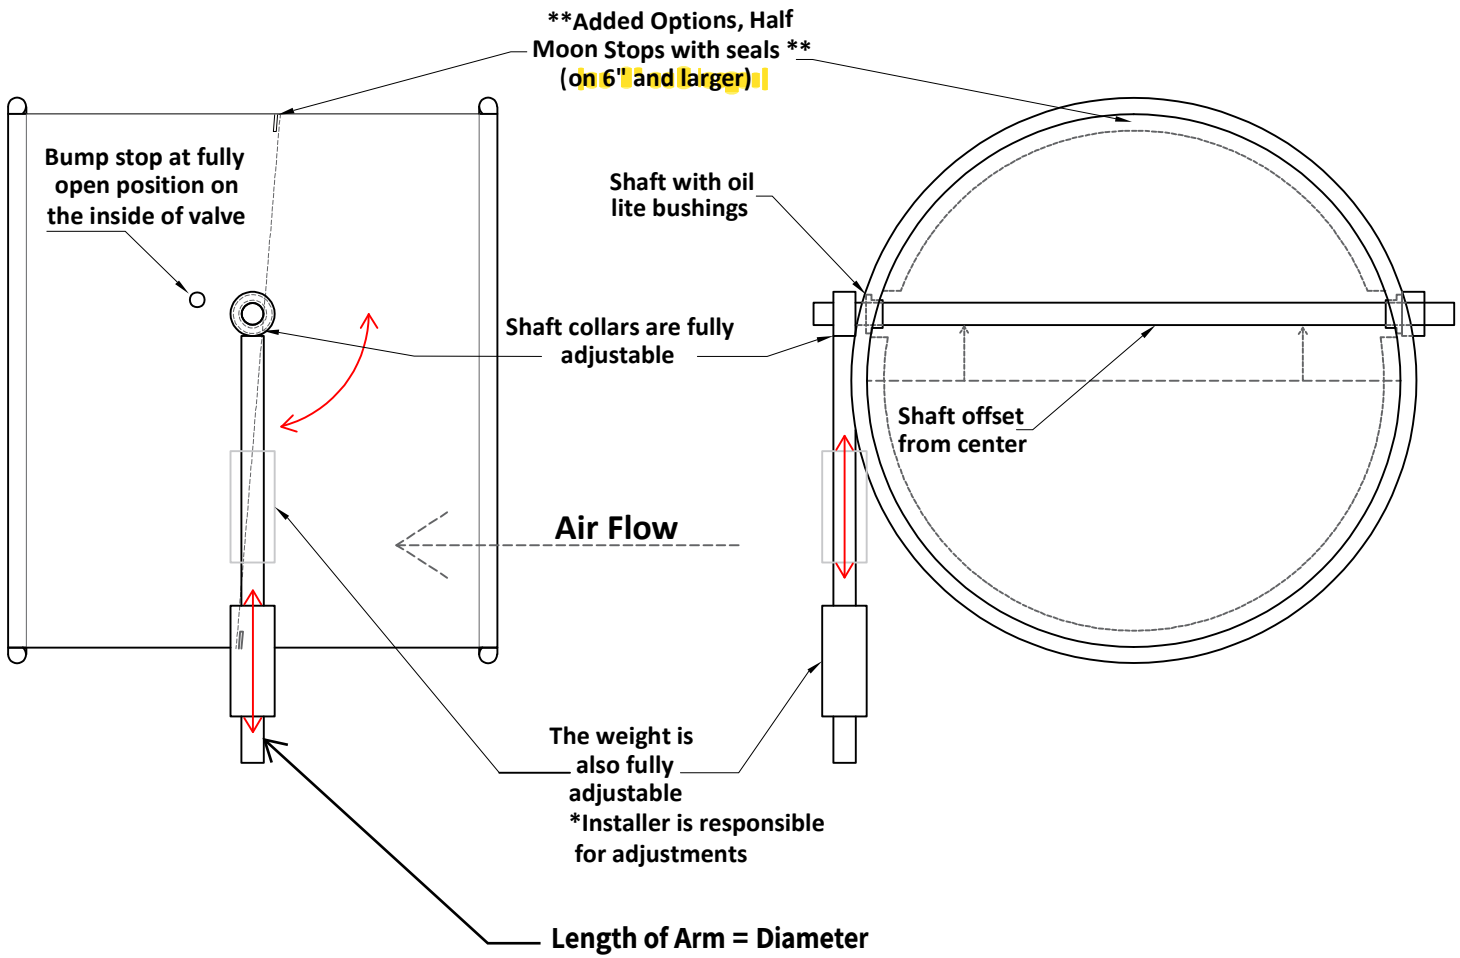


| Ø | Rolled Lip PN. | | Flanged PN. |
|---|---|---|---|
| 3" | RWB03.G24 | | FWR03.G24 |
| 4" | RWB04.G22 | | FWR04.G22 |
| 5" | RWB05.G22 | | FWR05.G22 |
| 6" | RWB06.G18 | | FWR06.G18 |
| 7" | RWB07.G18 | | FWR07.G18 |
| 8" | RWB08.G18 | | FWR08.G18 |
| 9" | RWB09.G18 | | FWR09.G18 |
| 10" | RWB10.G18 | | FWR10.G18 |
| 11" | RWB11.G18 | | FWR11.G18 |
| 12" | RWB12.G18 | | FWR12.G18 |
| 13" | RWB13.G18 | | FWR13.G18 |
| 14" | RWB14.G18 | | FWR14.G18 |
| 15" | RWB15.G18 | | FWR15.G18 |
| 16" | RWB16.G18 | | FWR16.G18 |
| 17" | RWB17.G18 | | FWR17.G18 |
| 18" | RWB18.G18 | | FWR18.G18 |
| 19" | RWB19.G18 | | FWR19.G18 |
| 20" | RWB20.G18 | | FWR20.G18 |
| 22" | RWB22.G18 | | FWR22.G18 |
| 24" | RWB24.G18 | | FWR24.G18 |

| Shaft Offset From Center | SIZE | OFFSET |
|---|---|---|
| | 3"-5" | 5/16" |
| | 6"-9" | 3/4" |
| | 10"-24"+ | 1" |

**NOTES:**

1. 3"-4" Butterflies are 6" OAL
   5"-24" Butterflies are 11" OAL
   25"+ Butterflies are 18" OAL
2. Standard with Rolled Lip and 1/2" shaft, available with Vanstone Lip and Angle Rings.Galvanized, Stainless Steel and Carbon Steel. Added Option, Half Moon Stops with seals, on 6" and larger
3. Comes with adjustable weight and oil lite bushings to regulate air flow, recommended in clean air applications only

| Dia. | Shaft Size |
|---|---|
| 3"-24" | 1/2" Shaft |
| 25"-47" | 1" Shaft |
| 48"+ | Verify |