

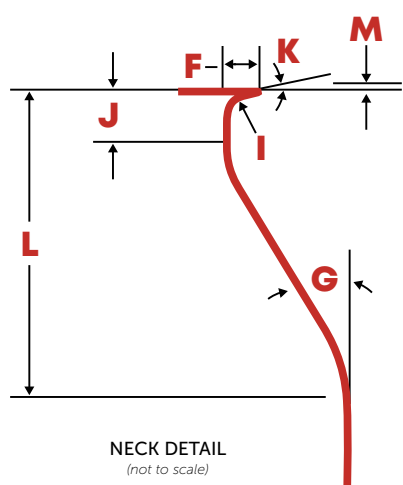
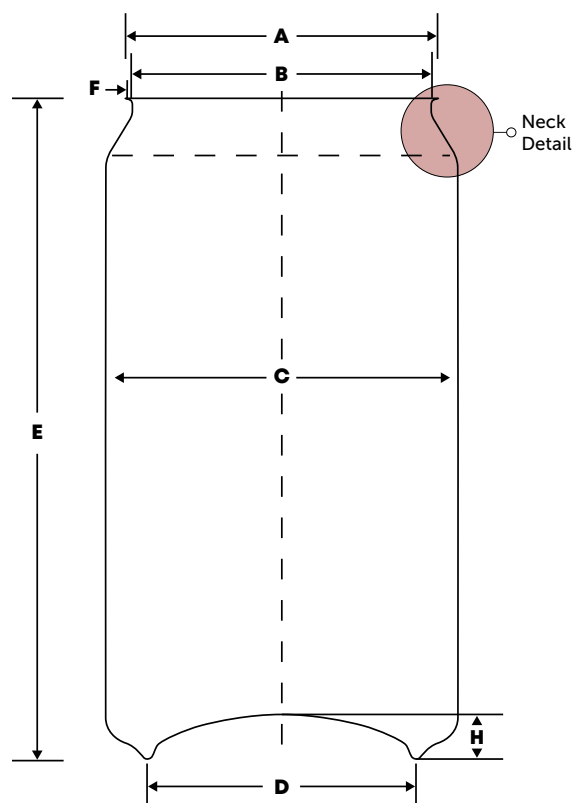


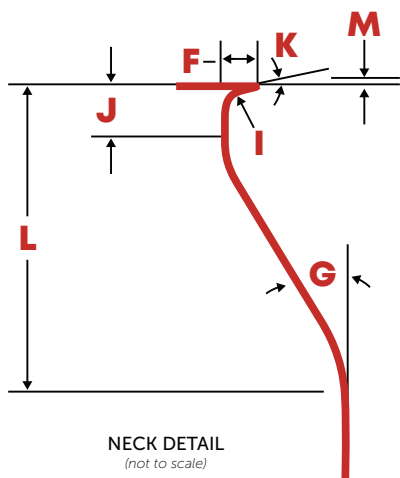

| Item     | Item Description       | Specification | +/-     |
|----------|------------------------|---------------|---------|
| <b>A</b> | Flange Diameter        | 2.248" MAX    |         |
| <b>B</b> | Plug Diameter          | 2.063" REF    |         |
| <b>C</b> | Body Diameter          | 2.601" REF    |         |
| <b>D</b> | Stand Diameter         | 1.890" REF    |         |
| <b>E</b> | Finished Can Height    | 4.811"        | ± 0.008 |
| <b>F</b> | Flange Width           | 0.082"        | ± 0.010 |
| <b>G</b> | Neck Angle             | 29°           |         |
| <b>H</b> | Bottom Sink            | 0.463"        | ± 0.004 |
| <b>I</b> | Flange Radius          | 0.059" REF    |         |
| <b>J</b> | Neck Seaming Clearance | 0.190" REF    |         |
| <b>K</b> | Flange Angle           | 15° MAX       |         |
| <b>L</b> | Shoulder Height        | 0.760" REF    |         |
| <b>M</b> | Flange Thickness       | 0.0072" REF   |         |

aTULC cans are manufactured by American Canning in Austin, Texas, USA.  
This information is provided solely for use by American Canning aTULC customers.

Revised: 02.02.2023

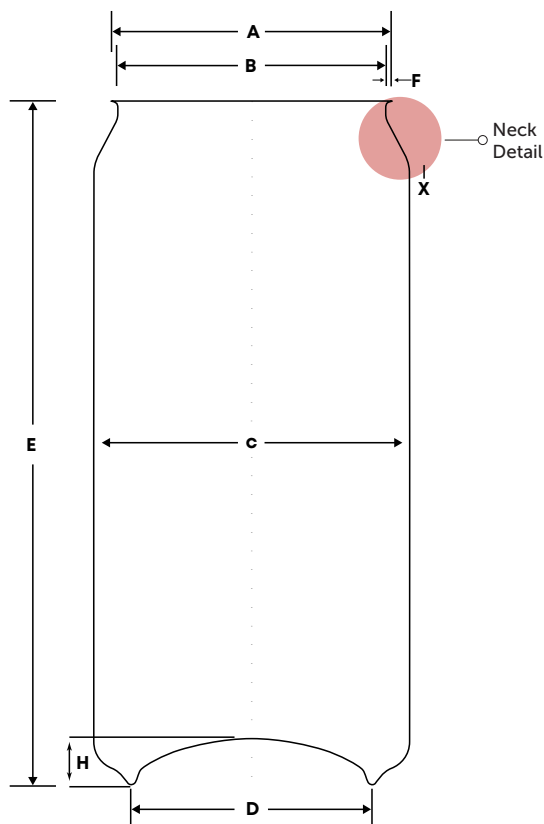

| Item     | Item Description       | Specification | +/-     |
|----------|------------------------|---------------|---------|
| <b>A</b> | Flange Diameter        | 2.248" MAX    |         |
| <b>B</b> | Plug Diameter          | 2.063" REF    |         |
| <b>C</b> | Body Diameter          | 2.601" REF    |         |
| <b>D</b> | Stand Diameter         | 1.890" REF    |         |
| <b>E</b> | Finished Can Height    | 6.189"        | ± 0.010 |
| <b>F</b> | Flange Width           | 0.082"        | ± 0.010 |
| <b>G</b> | Neck Angle             | 29°           |         |
| <b>H</b> | Bottom Sink            | 0.463"        | ± 0.005 |
| <b>I</b> | Flange Radius          | 0.059" REF    |         |
| <b>J</b> | Neck Seaming Clearance | 0.190" REF    |         |
| <b>K</b> | Flange Angle           | 0-15°         |         |
| <b>L</b> | Shoulder Height        | 0.760" REF    |         |
| <b>M</b> | Flange Thickness       | 0.0072" REF   |         |


aTULC cans are manufactured by American Canning in Austin, Texas, USA.  
This information is provided solely for use by American Canning aTULC customers.



# PRODUCT SPECIFICATIONS


200ml/6.8oz | 202/200 Finished Can

aluminum Toyo Ultimate Can (aTULC) is a Toyo Seikan Group Technology

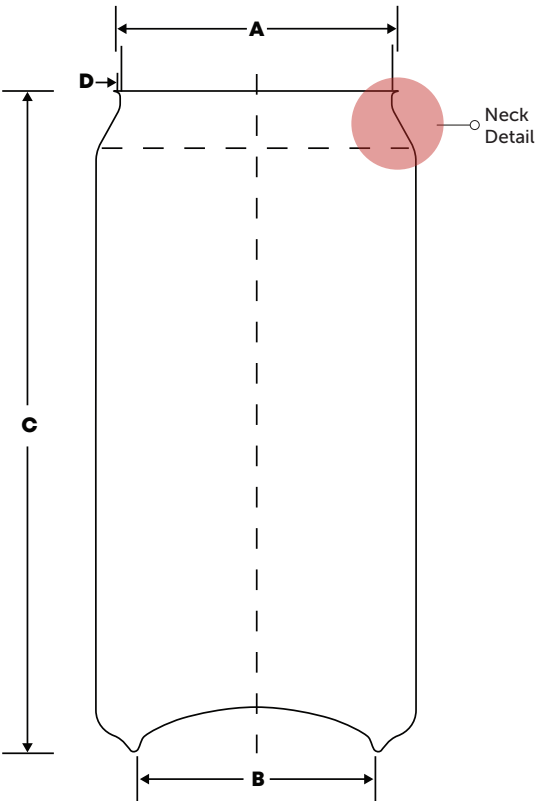

| Item | Item Description    | Specification | +/-      |
|------|---------------------|---------------|----------|
| A    | Flange Diameter     | 1.968" MAX    | ± 0.007  |
| B    | Stand Diameter      | 2.07 REF      | ± 0.007  |
| C    | Finished Can Height | 4.330"        | ± 0.009  |
| D    | Flange Width        | 0.082"        | ± 0.009  |
| E    | Flange Thickness    | 0.006" REF    | ± 0.0007 |

This information is provided solely for the use by American Canning aTULC customers.

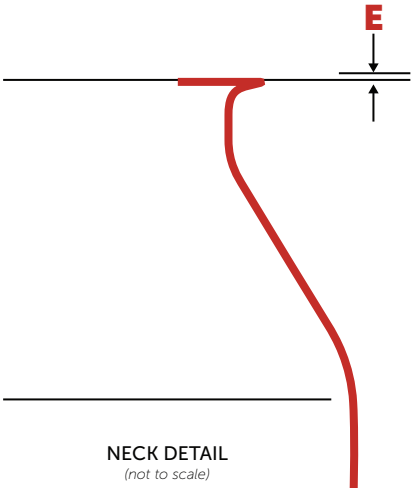

Revised: 08.15.2023




8001 Industry Way  
Austin, TX 78744  
americancanning.com



# PRODUCT SPECIFICATIONS


250ml/8.4oz | 202/200 Finished Can

aluminum Toyo Ultimate Can (aTULC) is a Toyo Seikan Group Technology

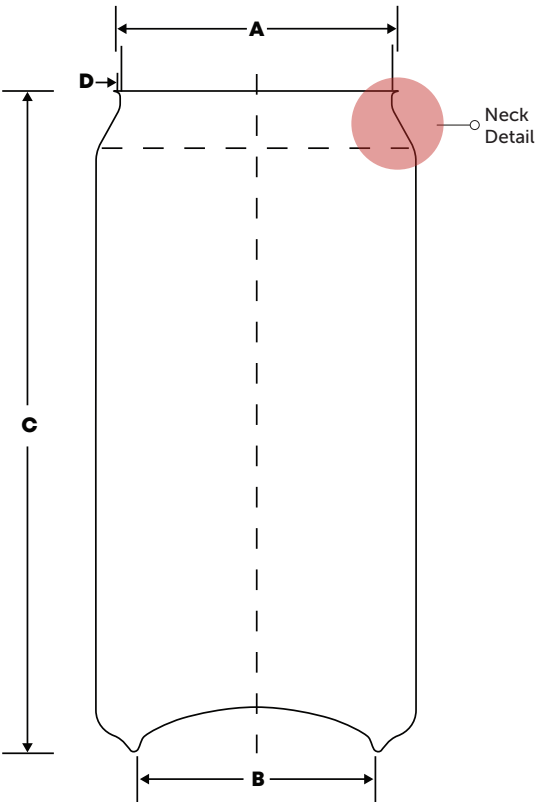

| Item | Item Description    | Specification | +/-      |
|------|---------------------|---------------|----------|
| A    | Flange Diameter     | 1.968" MAX    | ± 0.007  |
| B    | Stand Diameter      | 2.078 REF     | ± 0.009  |
| C    | Finished Can Height | 5.236         | ± 0.009  |
| D    | Flange Width        | 0.082"        | ± 0.009  |
| E    | Flange Thickness    | 0.006" REF    | ± 0.0007 |

This information is provided solely for the use by American Canning  
aTULC customers.

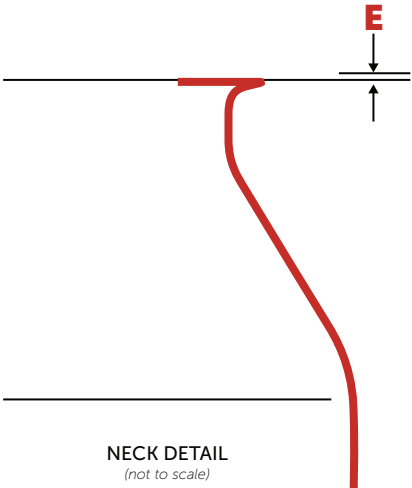

Revised: 08.15.2023