



Vacuum Units

macpi



Da oltre 55 anni **Macpi** progetta e produce macchinari, software e hardware per l'industria dell'abbigliamento. Incentrato sul ruolo chiave della R&D senza compromessi, oggi la qualità dei nostri prodotti made in Italy è apprezzata e internazionalmente riconosciuta. Un partner affidabile e professionale grazie alla sua infinita cura per i macchinari e per gli utenti finali.

La sede di Palazzolo s/O (Brescia) progetta e costruisce macchine altamente tecnologiche, gruppi automatici per termofusione, linee complete per pressatura intermedia e finale di giacche, cappotti, jeans, maglieria, pantaloni, camicie e macchine automatiche per applicazioni senza cuciture.

Il **Gruppo Macpi** comprende 3 unità produttive, 2 situate in Italia e una in Cina (Shanghai). Il marchio Fimas è stato acquisito da **Macpi** e vanta una lunga tradizione nella produzione di caldaie, tavoli, manichini e attrezzature leggere per il settore della lavanderia e dell'abbigliamento.

Il **Gruppo Macpi** è riconosciuto in tutto il mondo come un partner affidabile in grado di migliorare e fornire le migliori soluzioni ai clienti, sempre senza compromessi sulla qualità.

Since more than 55 years **Macpi** designs and manufactures machinery, software and hardware for the apparel industry. Focused on the key role of R&D without compromise, today the quality of our products made in Italy is highly appreciated and internationally well known. A reliable and professional partner thanks to its endless care for its products and end-users.

The headquarter located in Palazzolo S/O (Brescia) design and manufacturing highly technological equipment, automatic units for thermo-fusing, complete line for in-line and final pressing of jackets, coats, jeans, knitwear, trousers, shirts and a wide range of machines for stitch-free applications.

Macpi Group includes three production facilities, two of them located in Italy and one in China (Shanghai). FIMAS brand has been acquired by **Macpi** and has a long history as manufacturer of boilers, tables, dummies and light equipment both for laundry and garment industry. **Macpi Group** is worldwide recognized as trustable partner able to offer the best solutions to customers without effecting the final quality.



607

macpi



607.05

- motore 3HP (2,2Kw)
- giri 2900 R.P.M.
- n° stadi 5
- n° giri girante 2900
- prevalenza max 980mm H2O portata 150 m3/h
- portata max 680 m3/h prevalenza 220mm H2O

607.07

- motore 5,5HP (4,1Kw)
- giri 2900 R.P.M.
- n° stadi 7
- n° giri girante 2900
- prevalenza massima 1500mm H2O portata 100 m3/h
- massima portata 800 m3/h prevalenza 250mm H2O

607.08

- motore 7,5HP (5,5Kw)
- giri 2900 R.P.M.
- n° stadi 8
- n° giri girante 2900
- prevalenza massima 1700mm H2O portata 100 m3/h
- massima portata 800 m3/h prevalenza 300 mm H2O

607.05

- motor of 3HP (2,2Kw)
- engine speed 2900 R.P.M.
- no. of stages 5
- impeller 2900
- max head 980mm H2O, flow 150 m3/h
- max flow 680 m3/h, head 220 mm H2O

607.07

- motor of 5,5HP (4,1Kw)
- engine speed 2900 R.P.M.
- no. of stages 7
- impeller 2900
- max head 1500mm H2O flow 100 m3/h
- max flow 800 m3/h head 250mm H2O

607.08

- motor of 7,5HP (5,5Kw)
- engine speed 2900 R.P.M.
- no. of stages 8
- impeller 2900
- max head 1700mm H2O flow 100 m3/h
- max flow 800 m3/h head 300mm H2O



Steam generators

Indice

607 - p.3

610 - p.4

611 - p.5

Optionals - p.6

Technical Details - p.7



610

Aspiratore a turbina multistadi.
L'aspiratore ha le seguenti caratteristiche ed è completo di:

- gruppo di aspirazione
- motore elettrico
- due manicotti di collegamento in gomma

610.03

- motore 20HP (15,72Kw)
- giri 2900 R.P.M.
- n° stadi 3
- n° giri girante 4100
- prevalenza HT= 1300 mm H2O
- portata Q= 1800 m3/H

610.04

- motore 25HP (19Kw)
- giri 2900 R.P.M.
- n° stadi 4
- n° giri girante 4100
- prevalenza HT= 1500 mm H2O
- portata Q= 2000 m3/H

610.13

- motore 10HP (7,36Kw)
- giri 2900 R.P.M.
- n° stadi 3
- n° giri girante 3550
- prevalenza HT= 1100 mm H2O
- portata Q= 1500 m3/H

610

Multistage vacuum unit.
The vacuum unit is featuring the following characteristics and is complete with:

- vacuum unit
- electric motor
- two rubber couplings

610.03

- motor of 20HP (15,72Kw)
- engine speed 2900 R.P.M.
- no. of stages 3
- impeller 4100
- head HT= 1300 mm H2O
- flow Q= 1800 m3/H

610.04

- motor of 25HP (19Kw)
- engine speed 2900 R.P.M.
- no. of stages 4
- impeller 4100
- head HT= 1500 mm H2O
- flow Q= 2000 m3/H

610.13

- motor of 10HP (7,36Kw)
- engine speed 2900 R.P.M.
- no. of stages 3
- impeller 3550
- head HT= 1100 mm H2O
- flow Q= 1500 m3/H



611

Aspiratore a turbina multistadi.
L'aspiratore ha le seguenti caratteristiche ed è completo di:

- gruppo di aspirazione
- basamento
- motore elettrico
- due manicotti di collegamento in gomma

611.03

- motore 40HP (29,4Kw)
- giri 2900 R.P.M.
- n° stadi 3
- n° giri girante 3600
- prevalenza HT= 1700 mm H2O
- portata Q= 3400 m3/H

611.04

- motore 50HP (36,8Kw)
- giri 2900 R.P.M.
- n° stadi 4
- n° giri girante 3350
- prevalenza HT= 1900 mm H2O
- portata Q= 4100 m3/H

611

Multistage vacuum unit.
The vacuum unit is featuring the following characteristics and is complete with:

- vacuum unit
- base
- electric motor
- two rubber couplings

611.03

- motor of 40HP (29,4Kw)
- engine speed 2900 R.P.M.
- no. of stages 3
- impeller 3600
- head HT= 1700 mm H2O
- flow Q= 3400 m3/H

611.04

- motor of 50HP (36,8Kw)
- engine speed 2900 R.P.M.
- no. of stages 4
- impeller 3350
- head HT= 1900 mm H2O
- flow Q= 4100 m3/H



A.
Barilotto condense
Condensate
separator tank



B.
Silenziatore
Silencer




C.
Teleavviatore
Telestarter



D.
Valvola a farfalla
ON/OFF
Butterfly valve




A.

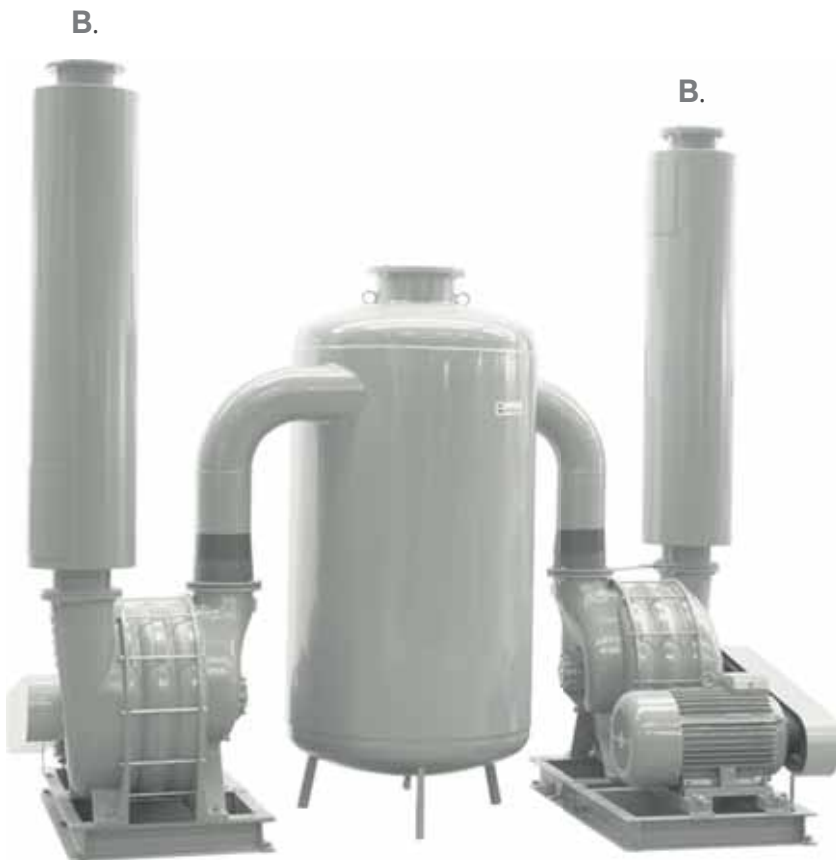


A.


607




610





611

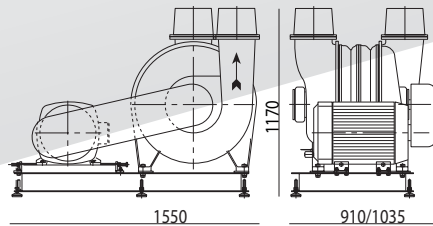





607



610

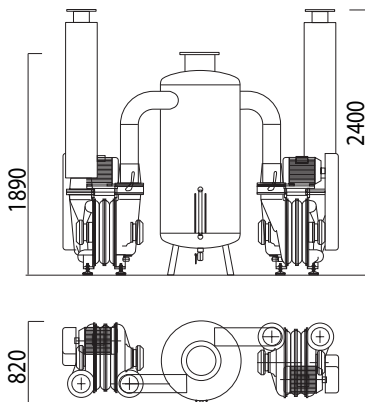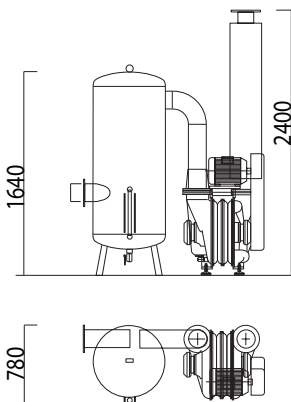

611

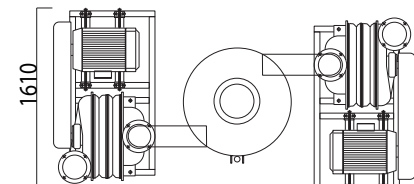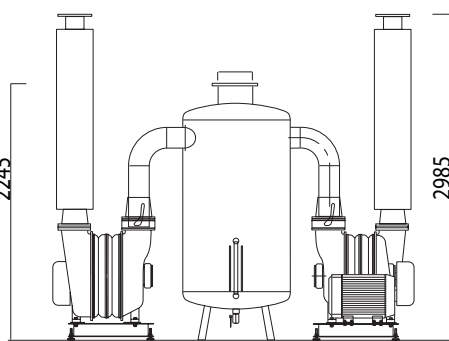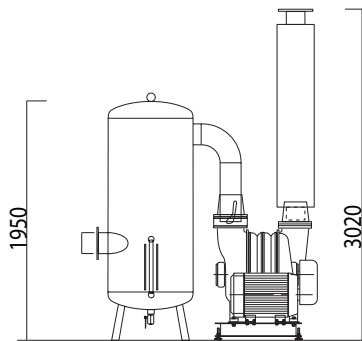

01.100.vac

Via Piantada, 9/D - Palazzolo s/Oglio - Brescia - Italia
Phone: +39 030 7403611 - Fax: +39 030 7403681
www.macpi.com - e-mail: info@macpi.com

