

ELECTRIC SCISSOR LIFT

Electric



IM 4680 MC

- 6,5 METER WORKING HEIGHT
- FRONT WHEEL DRIVE
- 1540 KG TOTAL WEIGHT


HIGH PERFORMANCE

- Negative electromagnetic parking brakes with electric disengagement
- Lateral deck extension at 36 cm
- Overload sensors



Tlf: 010 196 19 03 post@gantic.se www.gantic.se

IM 4680 MC Specifications

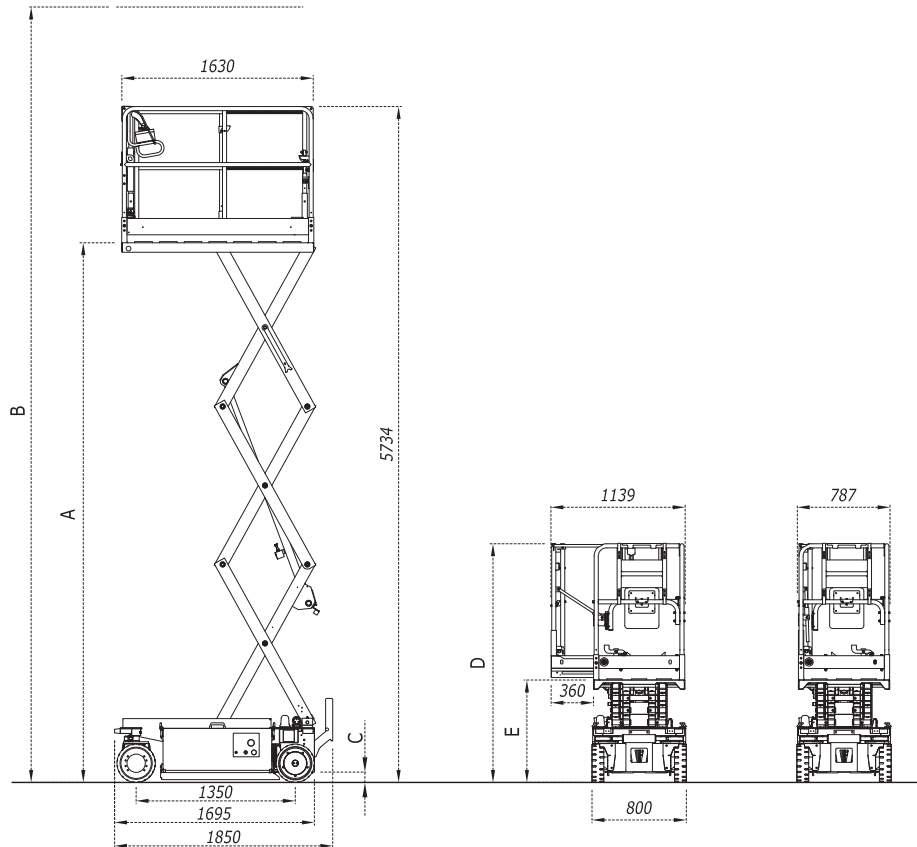

A Platform height	4,5 m
B Working height	6,5 m
C Ground clearance pot hole raised/stowed	0,09/0,02
D Stowed height	2,025 m
E Ground to platform height	0,869 m
F Width	0,78 m
Capacity	230 kg
Electric drive motor	24/2,4 V/kW
Lifting power pack - hydraulic	24/2,2 V/kW
Traction battery	24/185 c5 V/Ah
Deck extension	36 cm

Battery weight	4x28 kg
Battery charger	24V/20 V/A
Oil tank capacity	7 Liter
Traction speed	0 ÷ 4 km/h
Safety traction speed	0,7 km/h
Gradeability	25%
Internal + external turn radius	0/1,65 m
Tires dimensions	325 x 100
Tires type	Cushion
Max side/longitudinal tilt angle	1,5/2,5 °
Total weight	1540 kg