



# Vulcan Seals Type 75

## Technical Data Sheet



### Product Description

The Vulcan Seals Type 75 is a stationary-mounted highly compact elastomer bellows design, highly suitable for high-shaft speed water pump applications.

The design features a boot-mounted rotary counter ring that is intended to be inserted into a recess in the equipment impeller, with the metal sprung unit pressed into the static pump housing.

The shaft clearance on both sealing faces enables one size to be used on a number of shaft sizes. No part of this design contacts the pump shaft so is therefore bi-directional, and the spring is static and removed from centrifugal influences allowing very high rotational speeds to be sealed.

Supplied with a Vulcan Seals Type 75 boot-mounted stationary to suit USA design equipment housing sizes, the Vulcan Seals Type 75 is highly suited to low-pressure light water circulation duties.

### Why Choose the Vulcan Seals Type 75?

- Effective and easy-to-install design.
- High-speed capability and compact dimensions are highly suited to low-pressure automotive and power generation engine water pump duties.
- The sealant line on the outer pressed metal stationary housing provides greater sealing performance on the metal-to-metal housing contact surface.
- Vulcan Seals assembly provides a more integrated, robust, and resilient product compared to many market alternatives.
- The ribbed profile to the sealing contact point of the stationary provides optimal grip into the stationary recess with a sub-optimal surface finish.

### Standard Face Material Combinations

Rotary Face	Stationary Face	Complete Seal Code
VCP1 Carbon	VAW1 Ceramic	C
VCP1 Carbon	VSR1 Silicon Carbide	D
VCP1 Carbon	VAW1 Ceramic	KC

Guaranteed Stock/Material Elastomers: Viton™/FKM, EP, Nitrile and Metallurgy 304SS  
\*Non-stock guarantee

### Elastomer Temperature Capabilities

	Minimum	Maximum
Nitrile	-30°C	+120°C
EP	-40°C	+140°C
Viton™/FKM	-30°C	+180°C


Pressure: Up to 6 bar (87 psi)

### Mechanical Seal Replacement Range

Vulcan Seals Type 75 is a dimensional replacement mechanical seal for the following seal ranges:

- AES® | Type N-B03U\*
  - Flexaseal® | Type 6A\*
  - Lidering® | Type LRB03\*
  - U.S. Seal® | Type B\*
- John Crane® | Type 6A\*
  - Lidering® | Type 103\*
  - Pac-Seal® | Type 68\*
  - U.S. Seal® | Type BV

\*Rotary Face | \*\*Stationary Face

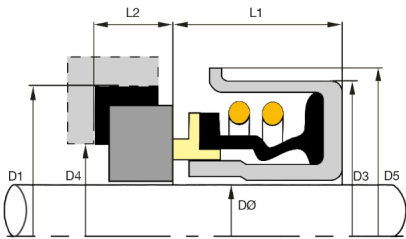

Dimensional Data

DØ (Imperial)	Seal Size Code	D1 (in)	D1 (mm)	D3 (in)	D3 (mm)	D4 (in)	D4 (mm)	D5 (in)	D5 (mm)	L1 (in)	L1 (mm)	L2 (in)	L2 (mm)
0.500	0127	1.000	25.40	1.124	28.56	0.669	17.00	1.250	31.75	0.531	13.50	0.312	7.93
0.625	0158	1.250	31.75	1.435	36.45	0.858	21.80	1.654	42.00	0.610	15.50	0.406	10.31
0.750	0191	1.375	34.93	1.575	40.00	0.886	22.50	1.701	43.20	0.610	15.50	0.406	10.31
1.000*	0254	1.625	41.25	1.811	46.00	1.122	28.50	2.087	53.00	0.787	20.00	0.437	11.10

Dimensions in mm and inches  
\\*Non-stock guarantee




Maximum Operating Pressure

The PV Chart shows the maximum operating pressures of this Vulcan Seals type, based on the seal face materials used. Different lines on the chart indicate different material combinations, as shown underneath.

It also assumes stable operation in a clean, cool, lubricating and nonvolatile fluid with an adequate flush rate.

For more in-depth pressure rating calculations based on specific material combinations and application conditions, please consult us.

PV Chart

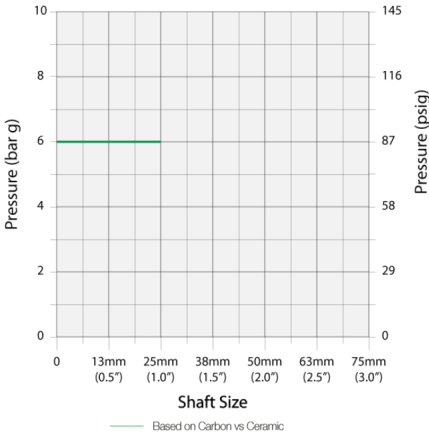

Application Conditions

	Criteria	Multiplier
Product Fluid	Lubricating fluids	X 1.00
	Aqueous solutions / Water	X 0.85
Temperature	Below 70°C (158°F)	X 1.00
	71°C to 120°C (160°F to 248°F)	X 0.85
	121°C to 175°C (250°F to 347°F)	X 0.75
	Over 176°C (349°F)	X 0.60
Speed	Up to 1750 rpm	X 1.00
	1750 to 3600 rpm	X 0.80

Face and Seat Materials

Combination	Multiplier
Carbon vs Ceramic	x 0.50
Carbon vs Silicon Carbide	x 1.00
Carbon vs Ceramic	x 0.50

Example Calculation for Vulcan Seals Type 75

- A. Shaft size: 0.500inch therefore pressure is 6 bar (from PV Chart)
- B. Media: Water (multiplier = 0.85)
- C. Temperature: 50°C (multiplier = 1.00)
- D. Speed: 1450 rpm (multiplier = 1.00)
- E. Face combination: Carbon vs Silicon Carbide (multiplier = 1.00)

For this particular Vulcan Seals Type 75 seal size, the calculation for the approximate guidance maximum operating pressure would be:

A x B x C x D x E  
6 bar x 0.85 x 1.00 x 1.00 x 1.00 = 5.10 bar

Guidance Only

Please note that due to the many operational and application variables that affect seal performance, the information given on this page is for guidance only.

We therefore strongly recommend careful individual testing and monitoring of all seals and related equipment for any proposed application.

Our policy is one of continuous technical and efficiency improvement. As such, all specifications may be subject to change without prior notice.

© <sup>TM</sup> All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.

\*\* Important: These limits are the theoretical elastomer or design limitations. For maximum theoretical operating pressure for your specific size and application please refer to calculation example within this data sheet. All performance information given is for guidance only and is dependent on material, operating and application factors that affect seal performance.