



Vulcan Seals Type 139
Xylem Lowara®
Technical Data Sheet



Product Description

The Vulcan Seals Type 139 Xylem Lowara® range is a step-balanced, robust, ‘O’-ring mounted conical spring seal with a positive drive, to suit certain models of ITT Lowara® eSV- series centrifugal pumps.

Why Choose the Vulcan Seals Type 139 Xylem Lowara®?

The Vulcan Seals Type 139 Xylem Lowara® features the benefits of the Vulcan Seals Type 7D with a step-shaft and positive drive to suit the dimensions of these pumps.

Pump Ranges

The Xylem Lowara® pump model includes the following pump ranges: "eSV" series models with 5.5, 7.5 or 11.0kW motors and 16 to 25bar pressure rating.


Standard Face Material Combinations

Elastomers	Rotary Face	Stationary Face	Metals	Complete Seal Code
EP	VSS1 Silicon Carbide	VCP1 Carbon	316 Stainless Steel	.E.SC.
Viton™/FKM	VSS1 Silicon Carbide	VSS1 Silicon Carbide	316 Stainless Steel	.V.SC.

Dimensional Data

DØ (Metric)	Seal Size Code	D1 (mm)	D3 (mm)	L1 (mm)	L2 (mm)
16.00	0200	26.90	29.50	34.00	7.00

Dimensions in mm
*Non-stock guarantee

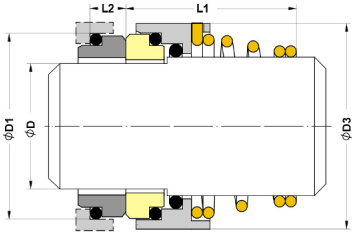

© ™ All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.
** All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.