



Vulcan Seals Type 94
GEA® Tuchenhausen®
Technical Data Sheet



Product Description

The **Vulcan Seals Type 94 GEA® Tuchenhausen®** range of single spring stationary seals, with Silicon Carbide faced counter ring rotaries and inserted Carbon sprung stationaries to replace the Chrome Oxide coated rotaries of the OEM seals.

Why Choose the Vulcan Seals Type 94 GEA® Tuchenhausen®?
The **Vulcan Seals Type 94 GEA® Tuchenhausen®** is suitable for high-speed pumps for fluid transfer in dairy and beverage processes, particularly with regard to Clean In Place (CIP) and bottling applications.

Pump Ranges

The GEA® Tuchenhausen® pump model includes the following pump ranges: GEA® Tuchenhausen® "AG", "ZG", "AR" & "ZR" series centrifugal pumps.


Standard Face Material Combinations

Elastomers	Rotary Face	Stationary Face	Metals	Complete Seal Code
EP	VSR1 Silicon Carbide	VCP1 Carbon	304 Stainless Steel	.E.D.
Viton™/FKM	VSR1 Silicon Carbide	VCP1 Carbon	304 Stainless Steel	.V.D.

Dimensional Data

DØ (Metric)	Seal Size Code	D1 (mm)	L1 (mm)
16.00	0160	30.00	7.00
24.00	0240	50.00	11.00
25.00	0250	50.00	11.00
35.00	0280	50.00	11.00

Dimensions in mm
*Non-stock guarantee

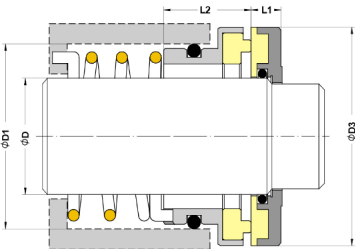

® ™ All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.
** All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.