



Vulcan Seals Type 128
GEA® Hilge®
Technical Data Sheet



Product Description

The Vulcan Seals Type 128 conical spring seals with bi-elastomeric stationaries, for pumps with flushed seal chambers. The Vulcan Seals Type 128 is frequently installed in tandem with the Vulcan Seals Type 12 seals listed on the previous page, on GEA® Hilge® centrifugal pumps.

Why Choose the Vulcan Seals Type 128 GEA® Hilge®?

This range features the benefits of the popular Vulcan Seals Type 12 rotary, mated to a unique dimension stationary to suit the dimensions of this pump range.

Pump Ranges

The GEA® Hilge® pump model includes the following pump ranges: GEA® Hilge® Pumps with "B3" code seals fitted.


Standard Face Material Combinations

Elastomers	Rotary Face	Stationary Face	Metals	Complete Seal Code
EP	316 Stainless Steel	VCP1 Carbon	316 Stainless Steel	.E.P.
EP	VSS1 Silicon Carbide	VSS1 Silicon Carbide	316 Stainless Steel	.E.S.

Dimensional Data

DØ (Metric)	Seal Size Code	D1 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	OEM Ref.
19.00	0190	39.30	31.00	20.00	17.50	0B3-19 B3
28.00	0280	47.30	40.00	26.50	18.00	0B3-28 B3
38.00	0380	59.30	53.00	33.50	16.80	0B3-38 B3

Dimensions in mm
*Non-stock guarantee

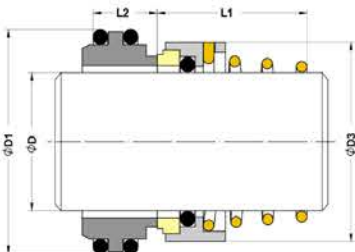

® ™ All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.
** All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.