



Vulcan Seals Type 1653D

Xylem Godwin®

Technical Data Sheet



Product Description

The **Vulcan Seals Type 1653D Xylem Godwin®** is a heavy-duty double-ended seal design featuring a multi-spring seal impeller side and a single spring arrangement for the bearing side of the chamber. Suitable for abrasive medias including slurry, this design is intended to suit the specific seal chamber dimensions of Godwin® Dri-Prime® dewatering pumps with a 75mm shaft size. The **Vulcan Seals Type 1653D Xylem Godwin®** follows a similar design to the Vulcan Seals Type 1653, please see the appropriate data sheet for more details.

Why Choose the Vulcan Seals Type 1653D Xylem Godwin®?

The most common arrangement is directly replaced by the **Vulcan Seals Type 1653D Xylem Godwin®**, which shares a similar construction to the Vulcan Seals Type 1653 but with an additional single spring component seal assembly to seal the oil bath.

Pump Ranges

The Xylem Godwin® pump model includes the following pump ranges: "Dri-Prime®" series with the relevant shaft size and seal type fitted.

Compliance & Certificates



Also available with built materials that adhere to the above compliance standards and certificates. Please enquire about your requirements.

Standard Face Material Combinations


Elastomers	Rotary Face	Stationary Face	Metals	Complete Seal Code
Nitrile	VSR1 Silicon Carbide	VSR1 Silicon Carbide/ VCP1 Carbon	304 Stainless Steel	.N.Z.
Viton™/FKM	VSR1 Silicon Carbide	VSR1 Silicon Carbide/ VCP1 Carbon	304 Stainless Steel	.V.Z.

Dimensional Data

DØ (Metric)	Seal Size Code	D1 (mm)	D2 (mm)	D3 (mm)	L1 (mm)	L2 (mm)	L3 (mm)
75.00	0750	109.90	98.00	96.00	45.50	14.90	37.00

Dimensions in mm

*Non-stock guarantee

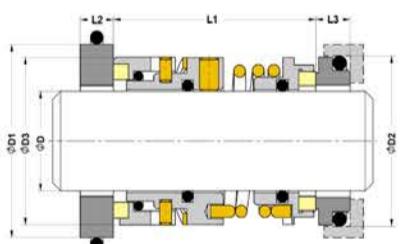

^{® TM} All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.

** All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.

Embrace Excellence - Service | Quality | Value | Integrity

Mechanical Seals | FEP/PFA Encapsulated 'O'-rings | Gland Packing | Expanded PTFE Gasketing
UK/World: +44 (0) 114 249 3333 | USA: +1 952 955 8800 | www.vulcanseals.com | contact@vulcanseals.com