



# Vulcan Seals Type 260A

Ebara®

Technical Data Sheet



## Product Description

The Vulcan Seals Type 260A Ebara® rubber diaphragm double-ended seal with boot-mounted stationaries, to suit the internal dimensions of Ebara® “Best”, “Right” and “DW” series, as well as other brands of small submersible pumps.

Suitable for dirty water duties with the hard Silicon Carbide faces used at the impeller end of installation, and the Carbon Ceramic faces at the bearing oil chamber end of the seal chamber.

## Why Choose the Vulcan Seals Type 260A Ebara®?

This common seal type is also utilised by other pump manufacturers for small portable submersible pumps. It offers the design benefits of the Vulcan Seals Type 226 and Vulcan Seals Type 24 ranges in fitting dimensions suitable for the seal chambers of these pump ranges.

## Pump Ranges

The Ebara® pump model includes the following pump ranges: "Ebara® Best®", "Right®" and "DW®".

## Compliance & Certificates



The Vulcan Seals mechanical seal range can be supplied with material combinations designed to meet the compliance standards and certifications listed above. Additional compliance or regulatory requirements can also be considered upon request. Please enquire to discuss your specific application.


## Standard Face Material Combinations

Elastomers	Rotary Face	Stationary Face	Metals	Complete Material Code
Viton™/FKM	VSR1 Silicon Carbide	VSR1 Silicon Carbide	304 Stainless Steel	.V.WA.
Viton™/FKM	VCP1 Carbon	VAW1 Ceramic	304 Stainless Steel	.V.WA.

## Dimensional Data

DØ (Metric)	Seal Size Code	D1 (mm)	D3 (mm)	L1 (mm)	L2 (mm)
14.00	0140	30.00	20.00	26.00	5.00
15.00	0150	30.00	20.00	26.00	5.00
16.00	0160	30.00	20.00	26.00	5.00

Dimensions in mm  
\*Non-stock guarantee

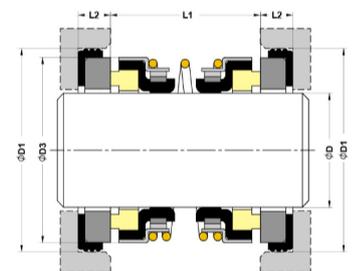

® ™ All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.

\*\* All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.