



Vulcan Seals Type 1651

Xylem® Jabsco®

Technical Data Sheet



Product Description

The **Vulcan Seals Type 1651 Xylem® Jabsco®** face is set to suit Jabsco® Xylem® Hy-line® lobe rotor pumps. We also offer other seals to suit common ITT Xylem® Jabsco® OEM equipment, please contact us for details.

Why Choose the Vulcan Seals Type 1651 Xylem® Jabsco®?

Featuring the design benefits of the popular Vulcan Seals Type 40 rotary modified into a clamp-mount design with stationary rings to suit the required housing dimensions of these pumps.

Pump Ranges

The Xylem® Jabsco® pump model includes the following pump ranges: Jabsco® "Hy-line®" rotary lobe pumps.

Compliance & Certificates



The Vulcan Seals mechanical seal range can be supplied with material combinations designed to meet the compliance standards and certifications listed above. Additional compliance or regulatory requirements can also be considered upon request. Please enquire to discuss your specific application.

Standard Face Material Combinations

Elastomers	Rotary Face	Stationary Face	Metals	Complete Material Code
Nitrile	VCP1 Cabron	316 Stainless Steel	316 Stainless Steel	.N.P.
EP	VCD1 Carbon	316 Stainless Steel	316 Stainless Steel	.E.QD.
EP	VSS1 Silicon Carbide	VSS1 Silicon Carbide	316 Stainless Steel	.E.R.


Dimensional Data

DØ (Imperial)	Seal Size Code	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	OEM Ref.
1.000	0254	37.00	38.00	11.50	12.30	LH 32, 34 & 42
1.375	0349	48.00	51.50	11.50	12.50	LH 44, LH 52
1.875	0476	60.50	64.50	12.70	13.70	LH 62, LH 64

Please note that the wave spring is located behind a face retaining plate that is not sold directly by Vulcan Seals

Dimensions in mm

*Non-stock guarantee

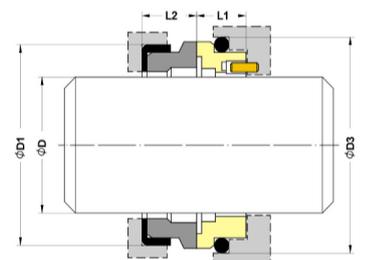

®™ All product names, brands and trademarks shown are property of their respective owners, are for identification purposes only, and do not imply affiliation nor endorsement.

** All dimensional and identification information shown is given in good faith and is based on extensive experience gained in business. Performance data is not provided for this product range based on the Vulcan Seals design being a replacement of, or an improvement on, a design that has originally proved suitable for the equipment and service concerned.