Fahnenmast-Versand

Tel.: 05222 / 9398312
info@fahnenmast-versand.de
www.fahnenmast-versand.de

Flag exposure:
Rotating socket moves in the direction of the wind, flag is always outstretched

Flag installation:
rope, windtracker arm, bands, flag weight


Raising and lowering the flag:
using internal rope, internal cleat or hoisting winch



Reduction sleeve

ANODIZING:
15 micron

Wall thickness:
[5-6 m]
2/2,5 mm
[7-10m]
2/2,5/2,5 mm
[11-12 m]
2/2,5/2,5/3,5 mm

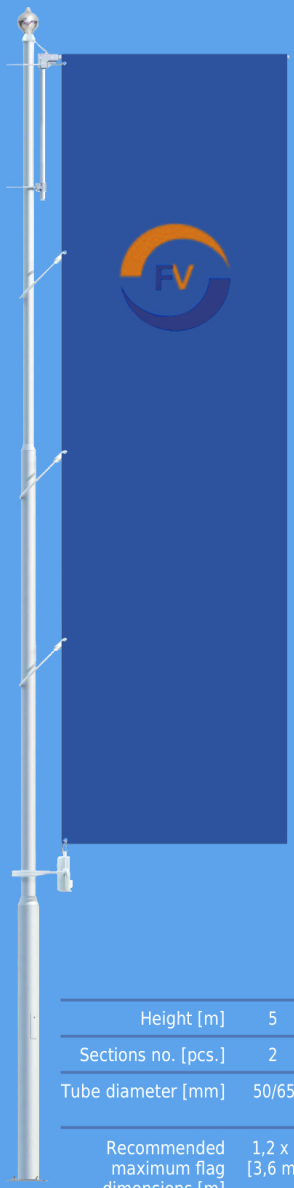

TOPS



Rotating socket with a top



Silver onion (aluminium) (option)



Golden onion (brass) (option)

FLAG INSTALLATION



Rope (kevlar) with swivel and distance ball



Internal cleat



Hoisting winch (option)



Windtracker arm



Flag weight



Flag bands

BASES



Ground sleeve (flagpoles 5-10 m)
To be installed in a foundation



Hinged base (flagpoles 5-12 m)
To be installed in a foundation



Portable base
(for pavement tiles 50x50 cm)

Height [m]	5	6	7	8	9	10	11	12
Sections no. [pcs.]	2	2	3	3	3	3	4	4
Tube diameter [mm]	50/65	50/65	50/65 80	50/65/ 80	50/65 80	50/65/ 80	50/65/ 80/95	50/65/ 80/95
Recommended maximum flag dimensions [m]	1,2 x 3 [3,6 m²]	1,2 x 3 [3,6 m²]	1,2 x 3,5 [4,2 m²]	1,2 x 3,5 [4,2 m²]	1,5 x 4 [6 m²]	1,5 x 4 [6 m²]	1,5 x 4 [6 m²]	1,5 x 4 [6 m²]