



Performance and durability

Our Performance UDL 90 underlayment provides moisture resistance to help protect your roof deck and excellent traction for installers. It resists wrinkling and its underside slip-resistant coating helps it lay flat and stay put.




Get the job covered™

Performance UDL 90

Product features:

- Durable construction resists stretching and tearing
- 90-day UV resistance¹
- Resists shrinking, and slip-resistant backing helps it lay flat and stay put
- GripSpot™ walking surface for excellent traction
- Meets or exceeds ASTM D8257 requirements
- Compatible under metal; cement tiles; clay tiles; slate; and wood, asphalt, and synthetic shingles

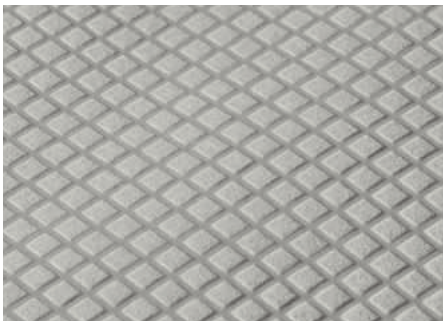

GripSpot™ technology provides an embossed surface and smooth channels to shed water, promoting dry, walkable working areas.

Product details²:

10.0 square roll:

- **Area:** 1,000 ft.² (92.90 sq. m)
- **Width:** 48" (1.22 m)
- **Length:** 250 linear ft. (76.2 lm)

Surface: Slip-resistant GripSpot™

Certifications:

- Meets or exceeds ASTM D8257
- Tested according to ASTM D4533 and ASTM D5034
- State of Florida Approved (FL20853)
- Meets or exceeds the requirements of the Texas Department of Insurance
- Can be used to comply with certain FORTIFIED requirements. Eligibility criteria, terms, and restrictions apply. See current FORTIFIED Home™ Standard available at fortifiedhome.org for details. U.S. only.
- ASTM E108 Class A Roofing Fire Rating⁴
- Intertek Code Compliance Research Report CCRR-1028



UV
Resistance¹



30-Year Limited
Warranty³



Visit us at ftsolutionsroof.com
For questions, call **877-423-7663**

¹ 90-day UV resistance for Performance UDL 90 is based on testing conducted under controlled laboratory conditions. This product is water resistant, NOT WATERPROOF. DO NOT USE as a temporary roof to protect property or possessions.
² Values stated are approximate and subject to normal manufacturing variation. These values are not guaranteed and are provided solely as a guide.
³ See *FT Solutions Limited Warranty* available at ftsolutionsroof.com for complete coverage and restrictions.
⁴ Refer to Intertek Directory of Building Materials for actual assemblies.