



High-quality leak barrier

Our Performance SA Leak Barrier provides a secondary layer of protection against leaks caused by wind-driven rain and ice dams for many steep-slope roofing applications in the form of a self-adhering, peel-and-stick barrier that can be installed in low temperatures and has high temperature stability.




Get the job covered™

Performance SA Leak Barrier

Product features:

- Can be used in many steep-slope roof systems
- Split-release liner for ease of application
- Modified asphalt adhesive seals around fasteners
- 90-day UV resistance¹
- Polyolefin facer helps resist water intrusions and mold and mildew growth
- Low-temperature application² (40°F / 4.4°C)
- High-temperature flow stability (240°F / 115°C)
- Meets or exceeds ASTM D1970
- Lifetime Limited Warranty³

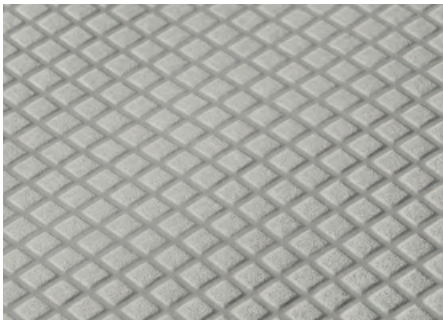

GripSpot™ technology provides an embossed surface and smooth channels to shed water, promoting dry walkable working areas.

Product details⁴:

2.0 square roll:

- **Area:** 200 ft.² (18.58 sq. m)
- **Width:** 36" (0.914 m)
- **Length:** 66.7' (20.33 m)
- **Breaking strength:** Meets or exceeds ASTM D5034 requirements
- **Tear strength:** Meets or exceeds ASTM D4533 requirements
- **Surface:** Slip-resistant GripSpot™
- **Additional Certifications:** Meets or exceeds ASTM D1970, State of Florida Approved (FL46754), meets the requirements of the Texas Department of Insurance, RCABC RoofStar Accepted Material



UV
Resistance¹



Installation
Temperature²



Lifetime Limited
Warranty⁴



Thermal
Stability



Visit us at ftsolutionsroof.com
For questions, call **877-423-7663**

¹ 90-day UV resistance is based on testing conducted under controlled laboratory conditions. Performance SA Leak Barrier should be covered by a primary roof covering as soon as possible and no more than 90 days after installation.

² Performance SA Leak Barrier can be installed in temperatures between 40°F - 140°F (4°C - 60°C) provided that the product has been stored in a heated area to ensure it is between 50°F - 100°F (10°C - 37.7°C) at time of installation.

³ Lifetime refers to the length of warranty coverage provided and means as long as the original individual owner(s) of a single-family detached residence owns the property where the qualifying product is installed. For other owners/structures, Lifetime coverage is not applicable. See *FT Solutions Limited Warranty* available at ftsolutionsroof.com for complete coverage and restrictions.

⁴ Values stated are approximate and subject to normal manufacturing variation. These values are not guaranteed and are provided solely as a guide.