

Self-Storage **9570-LA**

SteelBlue's **9570-Live Axle** Series features wind load resistance without the need for wind locks. The 9570-LA Series is best suited for self-storage in high wind zone applications where superior performance is required such as coastal communities.



Max opening size 10' x10'

Available in sizes up to 10' x 10' and in a variety of colors.



Warranty

Three-year door warranty. For paint, 35-year no-fade, 40-year film integrity.



Options

Insulated options available.



Enhanced Wind Load Performance

Each 9570-LA door is engineered and tested to meet specific wind load requirements, with ratings ranging from +31.1/-35.3 PSF to +16.7/-19.0 PSF depending on door width, making it ideal for high wind applications.



Easy to Use Tensioning Device

Each 9570-LA door uses a worm gear tensioning device that does not require special tools to apply or remove tension.




Commercial-Grade Construction

14-gauge galvanized steel guides with 3.5" wide profile and durable PVC wear strips combined with 12GA. weight bar assembly for enhanced durability and smooth operation.

- 1 Brackets:** 12-gauge reinforced galvanized steel
- 2 Door Curtain:** Industry standard profile, 26-gauge, Grade 80 prepainted steel with 5/8" ribbed corrugation
- 3 Bottom Bar:** 6063-T6 Aluminum extruded bottom bar with integrated 1-1/2 x 2 12GA galvanized weight bar and T-bulb astragal system

- 4 Drums:** 9.5" diameter steel drums engineered for live axle configuration
- 5 Head Stops:** 12-gauge galvanized
- 6 Guides:** 14-gauge galvanized steel guides with 3.5" wide profile, with durable PVC guide strips

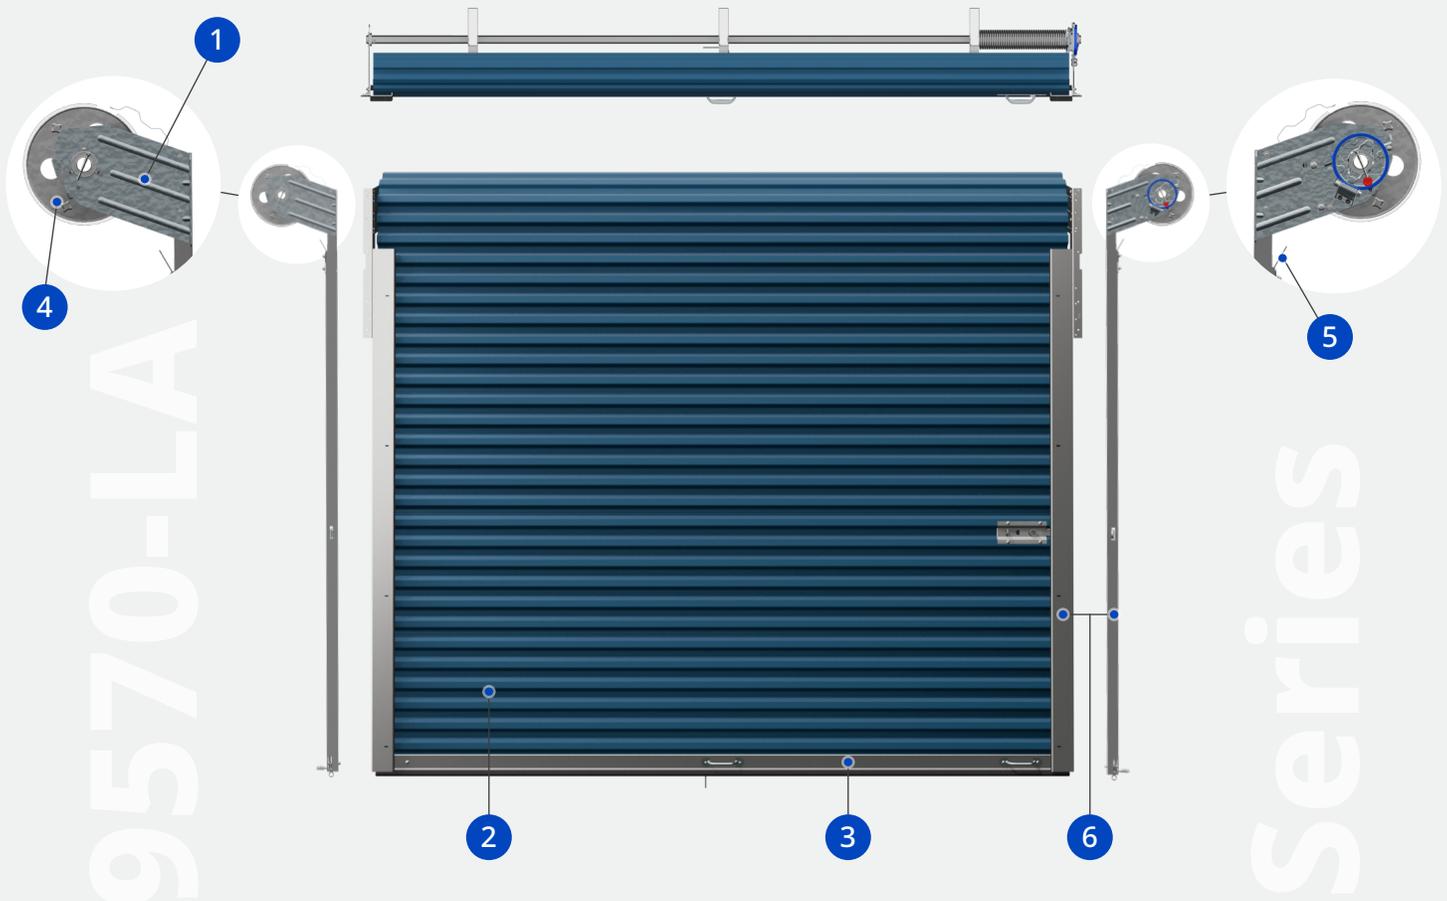

Door Schedule						
Door Width	6'-0	7'-0	8'-0	8'-8	9'-0	10'-0
Design Pressure (PSF)	+31.1 PSF	+26.9 PSF	+23.7 PSF	+22.0 PSF	+20.4 PSF	+16.7 PSF
	-35.3 PSF	-30.6 PSF	-26.9 PSF	-25.0 PSF	-23.2 PSF	-19.0 PSF

Visit our website for full technical data: www.steelbluebc.com

