
P18 - SUBWOOFER

SOUND PROCELLA PERFECTED

Dual 18 Inch Passive Subwoofer



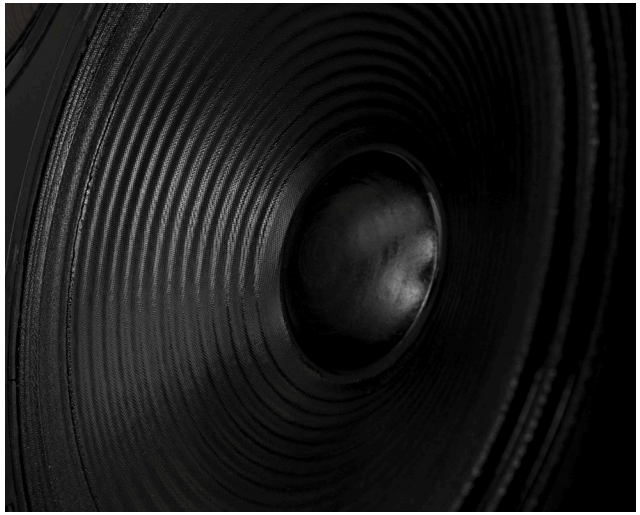

INTRODUCTION

The P18 is producing awesome low-frequency energy, its pure visceral bass fills even the largest rooms with seemingly unlimited headroom. In a class by itself, the P18 is the only subwoofer for those seeking the aural immersion of the reference cinema and live concert experience. This gives the subwoofer a stunning 134 dB (139 dB peak) output capability, and sub-bass extension to down below 18 Hz. The P18 is THX Approved for integration into professional rooms, including THX Certified Screening Rooms and THX pm3 Studios (professional mixing, monitoring, and mastering).

TECHNICAL SPECIFICATIONS

Impedance	Each driver is 8 ohms nominal
Frequency Response	
-3dB	21Hz
Maximum SPL @ 50Hz	
Continuous	133dB
Peak	139dB
Components	Dual long-throw professional 18" drivers with 4" voice coil. Aluminum demodulation ring and Neodymium magnets in 205 liter sealed box
Power Handling	
Continuous	2 x 1,200W
Peak	2 x 3,000W
Sensitivity	
1W/1m	102dB
Connectivity	Dual gold plated binding posts. One input per driver
Construction	Heavily internally braced MDF Semi matte textured black paint finish

Dimensions	26.4" x 41.3" x 11.8"
WxHxD	670 x 1050 x 300 mm
Shipping Carton	31.5"x47.25"x15.75"
WxHxD	800 x 1200 x 400 mm
Net Weight	132 Lbs / 60 Kg
Shipping Weight	143 Lbs / 65 Kg (plus pallet)
Included	Damper feet, parallel input cables
Assembly	Belgium; 100% QC testing
Recommended Amplifier	2-ch DA08-DSP

Procella amplifiers are sold and packaged separately.

Specifications subject to change. | ©2026 Procella Audio Belgium, BV | Procella Audio USA, LLC. | All rights reserved. | www.procella.audio