
U15 - SUBWOOFER

SOUND PROCELLA PERFECTED

Single 15 Inch Passive Subwoofer



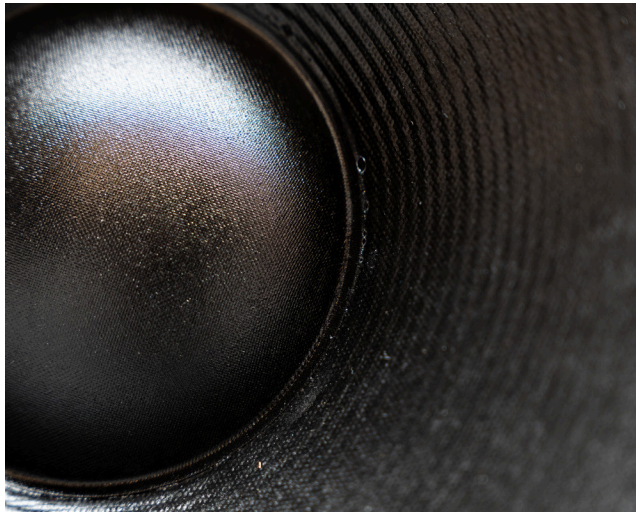

INTRODUCTION

Part of the new UNO Series, the U15 builds on the foundation of the U12 with increased output, deeper extension, and greater headroom. Featuring a 15" long-throw driver in a sealed enclosure, it reaches down to 22Hz with authority and control. Tight, articulate bass that delivers impact without sacrificing precision. Designed for medium to large rooms, the U15 offers the perfect balance between power and accuracy, making it a versatile choice for high-performance cinema systems and demanding listening environments.

TECHNICAL SPECIFICATIONS

Impedance	8 Ohms nominal
Frequency Response	
-3dB	22Hz
Maximum SPL @ 50Hz	
Continuous	113dB
Peak	119dB
Components	15 inch long-throw driver with 75mm voice coil in a 48 liter sealed box
Power Handling	
Continuous	450W
Peak	900W
Sensitivity	
1W/1m	93.8dB
Connectivity	Gold plated binding posts
Construction	Void free MDF, internally cross-braced, painted black finish

Dimensions	
WxHxD	540x621x202mm (+10 grille)
Shipping Carton	
WxHxD	628x708x300mm
Net Weight	25 Kg
Shipping Weight	28 Kg
Included	Damper Feet
Assembly	Belgium; 100% QC tested
Amplification	External amplifier is required 1ch DA03-DSP / 1ch DA08-DSP recommended

Procella Amplifiers are sold and packaged separately

Specifications subject to change. | ©2026 Procella Audio Belgium, BV | Procella Audio USA, LLC. | All rights reserved. | www.procella.audio