P5 - LOUDSPEAKER

SOUND PROCELLA PERFECTED

Main, Surround & Height Channels



INTRODUCTION


The P5 delivers the full dynamic range experience to smaller rooms and rooms with multiple surrounds and height speakers. Its compact cabinet can be oriented either vertically or horizontally, even mounted on the ceiling, thanks to its 80 degree circular waveguide and 1" pro compression driver. The P5 comes in semi-matte black or white finish with a magnetically attached removable grille.

TECHNICAL SPECIFICATIONS

Impedance	8 ohms nominal Phase angles less than 45 degrees
Power Handling	
Continuous	75W
Peak	250W
Frequency Response	
-3dB	90Hz – 20kHz
Maximum SPL	
Freestanding Peak	107dB continuous 113dB
In wall Peak	113dB continuous 119dB
Dispersion Pattern	
-6dB	Constant directivity; 80° circular from 2.5kHz
Sensitivity	
1W/1m	91dB
Crossover	Asymmetrical, phase aligned 2.2kHz, BSC
Finish	White or Black semi-matte painted
Recommended Amplifier	1-ch DA03-DSP

Components	
Midrange	5.25" driver with 26mm voice coil in 5 liter sealed box
High Frequency	1" compression driver on a circular constant directivity waveguide
Connectivity	Gold plated large diameter binding posts
Wall Mount	Inserts for VESA 100 bracket and keyholes provided for both vertical and horizontal mounting
Dimensions	
WxHxD	12" x 7.5" x 6.7" 303 x 190 x 170 mm
Shipping Carton	
WxHxD	15.35" x 11.4" x 10.25" 390 x 290 x 260 mm
Net Weight	10.6 Lbs / 4.8 Kg
Shipping Weight	12.3 Lbs / 5.6 Kg
Assembly	Belgium; 100% QC testing



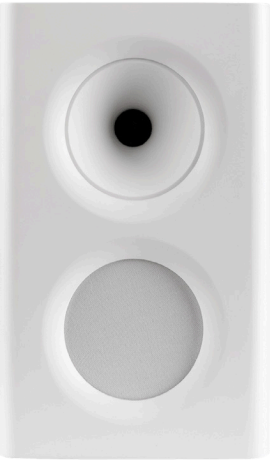

Specifications subject to change. | ©2026 Procella Audio Belgium, BV | Procella Audio USA, LLC. | All rights reserved. | www.procella.audio