



Zone 1 Fixed Camera System

The Safeye Zone 1 Fixed Camera video monitoring system offers a low-cost option for those who need clear imaging of difficult-to-view and dangerous locations. This Safeye package has everything you need in a lightweight, easy to use package.



Benefits:

This Zone 1 camera works day and night, providing clear images of your workspace or yard while keeping your costs low.

Though they are rated for Zone 1 the cameras are ultralight and easy to ship.


Typical Applications:

Well head; BOP, flowhead; coil tubing; crane monitoring; rig floor; mud hut; monkey board

Features:

- No local power required
- Interference-free image
- Diecast aluminium Exd housed camera
- Compact, with single cable for easy installation
- Can be configured as per client requirements

Proposed System Layout:

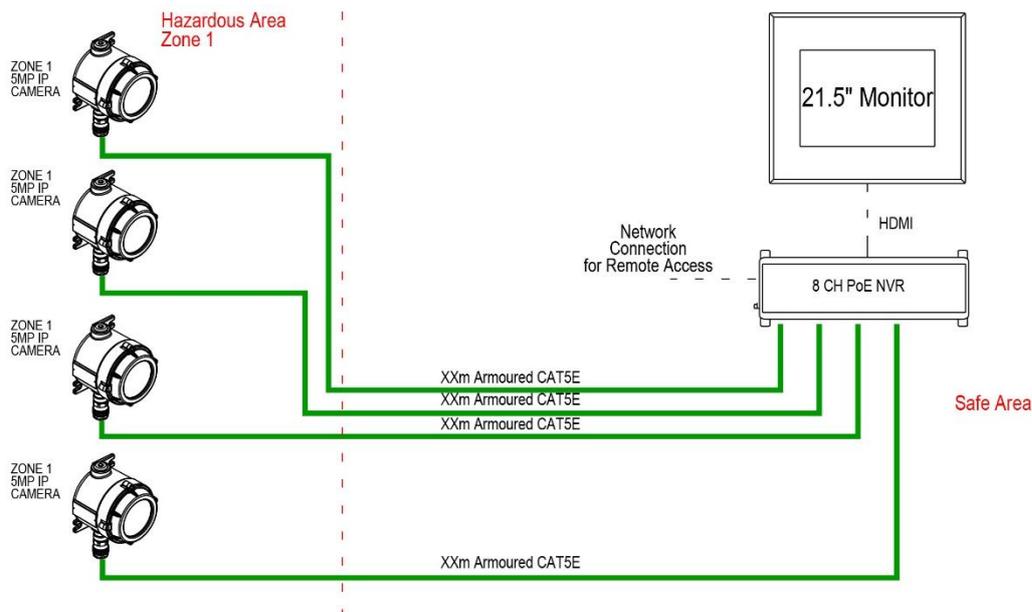

Improve efficiency.
Increase safety.
Reduce costs.





Zone 1 Fixed Camera System

| Specifications | Standard | Options |
|--|--|-----------------------|
| Zone 1 Day/Night Camera | Zone 1 rated IP66 Diecast Enclosure 2kg ø160 x 141mm Operating Temperature -25°C to +60°C 12VDC 5MP fixed camera Minimum Illumination 0.008 Lux@ F1.6 Connected to Control Unit with Armoured Cat 5e cable Ex M20 gland and ¾" NPT adapter | 4 cameras recommended |
| Network Interface | RJ45 ethernet port | |
| NVR Recorder (Safe Area) | 2.6kg 375 x 360 x 53mm Operating Temperature -10°C to +55°C Power Input AC 100V/240V, 50/60Hz <300W 10Tb storage capacity | |
| NVR Recorder Inputs | Max 8 channel PoE camera connection | |
| NVR Recorder Connectors | 1x RJ45 1x USB2.0 1x USB3.0 HDMI VGA | |
| Monitor (Safe Area) | 2.6kg 507 x 383 x 193mm (with stand) 21.5" Screen Size Operating Temperature -20°C to +50°C Power Input AC 100V/240V, 50/60Hz <300W 1920 x 1080 Resolution Aspect Ration 16:9 | |
| Monitor Connections | 1x HDMI 1x VGA | |
| Contact us to discuss your requirements sales@eztek.co.uk | | |

www.eztekglobal.com

Improve efficiency.
Increase safety.
Reduce costs.

Rev. 2 2026

