


3- PHASE POWER BOARD – AW/FAN COIL/LIGHT ROOM CONTROLLER:
SLB-3P-FMB, P/N: SLB-0020 SENSE-LINK SERIES, MODBUS SLAVE RTU- FULL OPTIONS

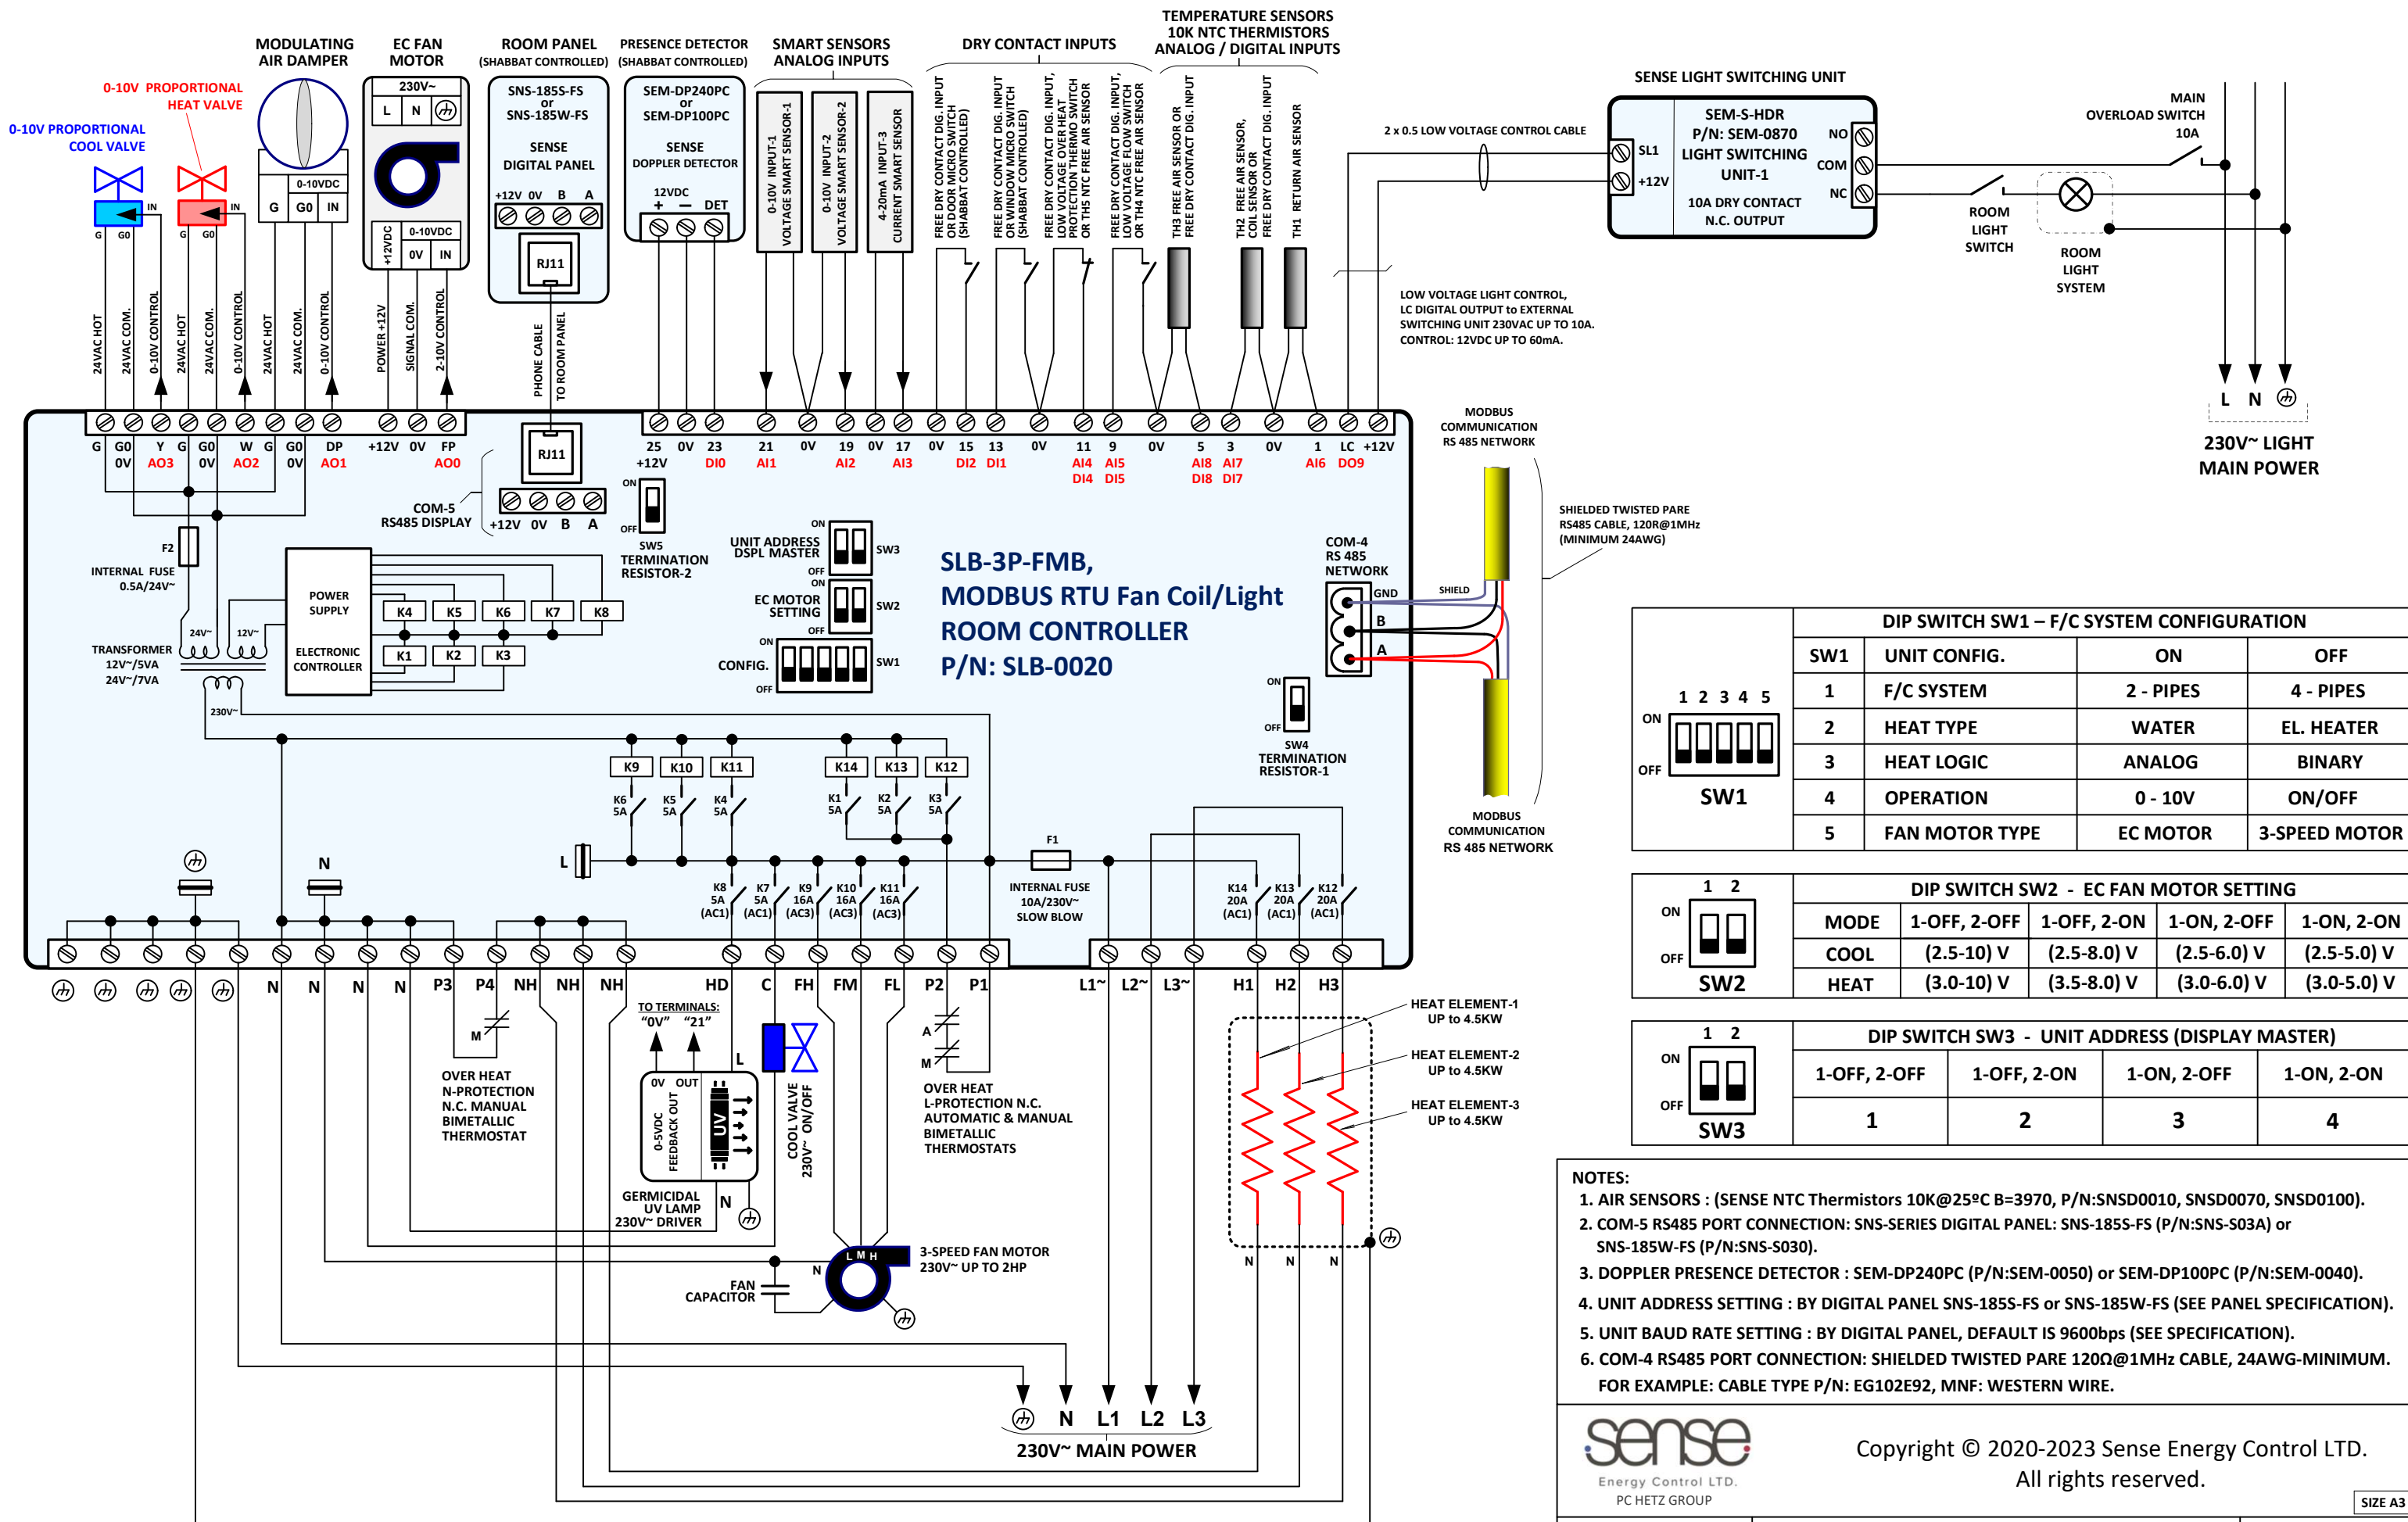

DIP SWITCH SW1 – F/C SYSTEM CONFIGURATION				
SW1	UNIT CONFIG.	ON	OFF	
1	F/C SYSTEM	2 - PIPES	4 - PIPES	
2	HEAT TYPE	WATER	EL. HEATER	
3	HEAT LOGIC	ANALOG	BINARY	
4	OPERATION	0 - 10V	ON/OFF	
5	FAN MOTOR TYPE	EC MOTOR	3-SPEED MOTOR	

DIP SWITCH SW2 - EC FAN MOTOR SETTING				
MODE	1-OFF, 2-OFF	1-OFF, 2-ON	1-ON, 2-OFF	1-ON, 2-ON
COOL	(2.5-10) V	(2.5-8.0) V	(2.5-6.0) V	(2.5-5.0) V
HEAT	(3.0-10) V	(3.5-8.0) V	(3.0-6.0) V	(3.0-5.0) V

DIP SWITCH SW3 - UNIT ADDRESS (DISPLAY MASTER)			
1-OFF, 2-OFF	1-OFF, 2-ON	1-ON, 2-OFF	1-ON, 2-ON
1	2	3	4

- NOTES:
- AIR SENSORS : (SENSE NTC Thermistors 10K@25°C B=3970, P/N:SNSD0010, SNSD0070, SNSD0100).
 - COM-5 RS485 PORT CONNECTION: SNS-SERIES DIGITAL PANEL: SNS-185S-FS (P/N:SNS-S03A) or SNS-185W-FS (P/N:SNS-S030).
 - DOPPLER PRESENCE DETECTOR : SEM-DP240PC (P/N:SEM-0050) or SEM-DP100PC (P/N:SEM-0040).
 - UNIT ADDRESS SETTING : BY DIGITAL PANEL SNS-185S-FS or SNS-185W-FS (SEE PANEL SPECIFICATION).
 - UNIT BAUD RATE SETTING : BY DIGITAL PANEL, DEFAULT IS 9600bps (SEE SPECIFICATION).
 - COM-4 RS485 PORT CONNECTION: SHIELDED TWISTED PARE 120Ω@1MHz CABLE, 24AWG-MINIMUM. FOR EXAMPLE: CABLE TYPE P/N: EG102E92, MNF: WESTERN WIRE.



Copyright © 2020-2023 Sense Energy Control LTD.
All rights reserved.

FULL OPTIONS	PRODUCT NAME: SLB-3P-FMB_SENSE LINK 3PH FC/L485 CONTROLLER	DESIGN: ALEX KUGEL
SOFTWARE: V0.01	PRODUCT P/N: SLB-0020	REV- 02 (25.04.2024)