



Guangzhou Beian Lock Technology Co.,Ltd.

Add.: Rm 909, No.43 XinShuiKeng Section, ShiXin Road, DaLong Street,

Panyu District, Guangzhou. China 511450


Email: daniel@beian-lock.com

Tel: 020-23889581 Fax: 020-23889585

Website: www.beian-lock.com

## PRODUCT SPECIFICATION


Item Name	Industrial Safety Interlocks E5 - C01K01D01
Material	Zinc Alloy
Cable	Zinc Alloy + Stainless Steel
Cylinder	/
Label	/
Series	Having 1 Module / 2 Modules / 3 Modules--(1-5 Modules Optional)
Size ( mm )	206mm (L)× 85mm(H)× 40mm(T)
Weight(g)	2.5kg
Colour	Silver
Application	Factory, Building, Mechanical, Auto, Hospital,Chemical, Electric Plant
Warranty	1YEAR
Certificates	ISO9001、CE、ROHS

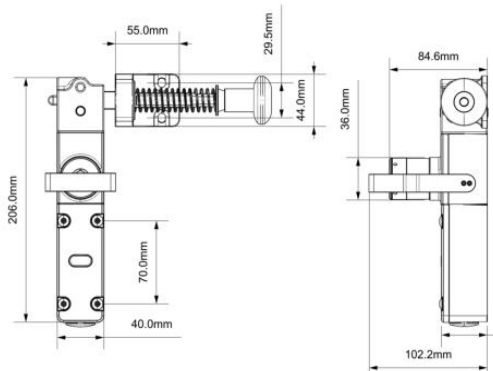

## Product Description


1. The lock body is made of eco-friendly zinc alloy die-cast moulded. It's lightweight, corrosion resistant and temperature resistant from -40°C to +180°C.
2. The key is made of stainless steel SS304 precision casting moulded. The density of key teeth is processed by a 4-axis multi-function processing machine. The quantity and code of the key can be customized as required.
3. The product weight is 2.5kg, the weight depends on modules. It's simple to assemble and durable to use.
4. The internal structure of the lock body is made of sturdy and durable stainless steel, which is anti-oxidation, corrosion-resistant, not easy to damage, and has a low mutual opening rate.
5. The interlock is paring with handle actuator that is made of stainless steel SS304. It can be applied to different workplace and assembled in different angle.
6. The interlock device is an integrated design for simple operation. It only needs to turn the key to unlock, the machine stops simultaneously and the door opens for safe entry.
7. The structure of the interlock device is applied with new practical patent design.

## Product Showcase

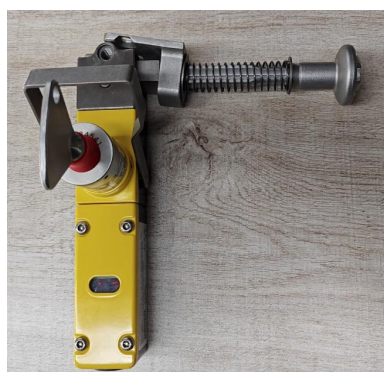

### Circuit Diagram :

The following figure shows the circuit diagram when the lock latch inserted:

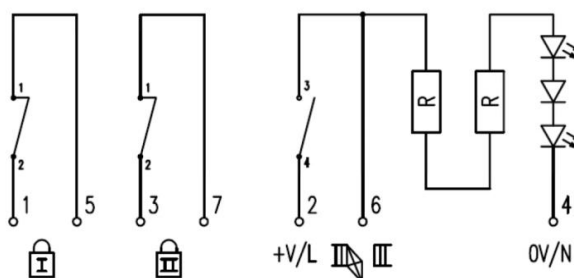

## Remarks

1. Please keep the product in a clean, dry, cool and ventilated place
2. The product cannot be used under environment temperature is from -45°C to 180°C.
3. In locking state, please hang a safety tags, do not remove by non-professionals
4. Keep the product away from high temperature, flammable and explosive places.
5. If broken or wrong package when purchasing, please contact us soon.
6. For more information, please visit www.beian-lock.com

Certificate

The product is qualified according to delivery inspection

Inspector: \_\_\_\_\_

Date of Manufacture: \_\_\_\_\_

Guangzhou Beian Lock Technology Co.,Ltd

TEL.: 020-23889581/23889579

Website: www.beian-lock.com