

Jøtul C 550 V2 Rockland



JØTUL C 550 V2 ROCKLAND

FEATURES

- Jøtul Fusion™ technology delivers a clean-burning stove that requires no bypass damper, allowing the combustor to begin reducing emissions almost immediately
- Toolless drop down baffle design allows for easy access to the flue for cleaning
- Combustor is accessible through the front door for easy inspection and cleaning
- Available in Arched or Clean Face models
- Choose from four required surrounds: Cast Iron, Decorative Steel, Simple Steel, or Trimmable Steel
- Optional Steel Wide Trim Kit (44"W x 34"H)
- Standard high performance twin EBM Flat-Pak blower fans (110 cfm)
- Available in Matte Black Paint
- Firebox size: 2.0 ft³
- Log length: Up to 24"
- Emissions: 1.1 grams/hr
- Maximum heat output: Up to 65,000 BTU/hr*
- Heating capacity: Up to 1,700 sq.ft.
- Burn time: Up to 9 hrs

Minimum Fireplace Dimensions

A: Front Width* 33"



B: Height 23 3/4"

C: Rear Width 24"

D: Rear Height 22"

E: Depth 18"

*NOTE: Width dimension accommodates clearance for blower power cord routing.

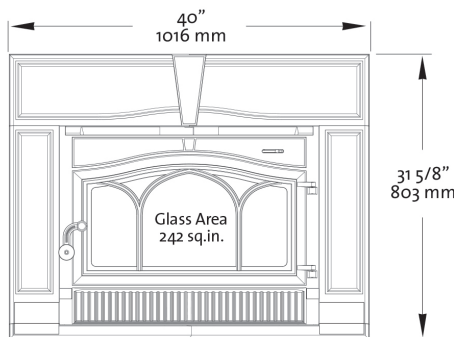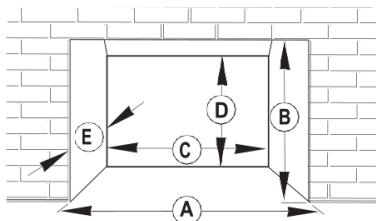


Jøtul C 550 V2 Rockland Clean Face with Cast Iron Surround, and optional Steel Wide Trim Kit



Jøtul C 550 V2 Rockland Arched with Decorative Steel Surround



Jøtul C 550 V2 Rockland Clean Face with Simple Steel Surround

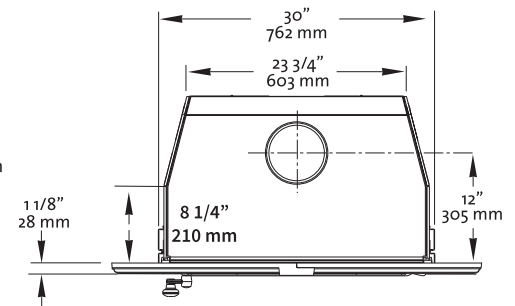

• Jøtul has a policy of constant improvement and upgrading. Products therefore may differ in specification, design, material or dimensions at any time without prior notice.

• *The maximum heat output value is representative of a refueling cycle which may be used by the home owner that would be more frequent than prescribed by the certification testing method.

TIMELESS NORWEGIAN CRAFT

