



GENERAL NOTES:

1. Designed for H-20 load.
2. Concrete Strength $f'_c = 5000$ psi.
3. Reinforcing Steel: ASTM A615 (rebar) grade 60
4. Cover to reinforcing: 1 1/2" u.n.o.
5. Exclusions: Inserts/penta bolts for plywood covering (by others).

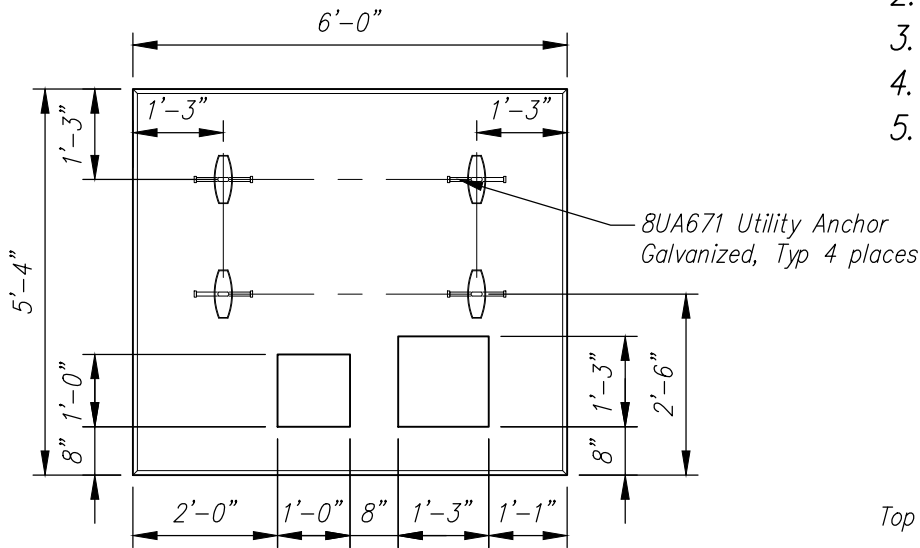


PLAN

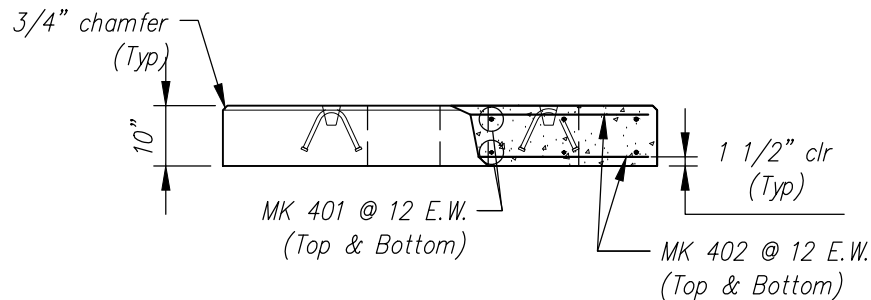

ELEVATION

BILL OF MATERIALS / EMBEDS				
CSI ID#	DESCRIPTION	QTY	UM	COMMENTS
EM-00115	8UA671 UTILITY ANCHOR GALV	4	EA	
RM-00013	REBAR #4 BLACK- GR 60	94	LB	
MX-FA5000SC20	MIX DSGN 20% FLY ASH 5000 SELF COMPACT	1.82	CY	

Rebar Schedule			
MK	QTY	LENGTH	
401 #4	14	5'	1"
402 #4	12	5'	9"

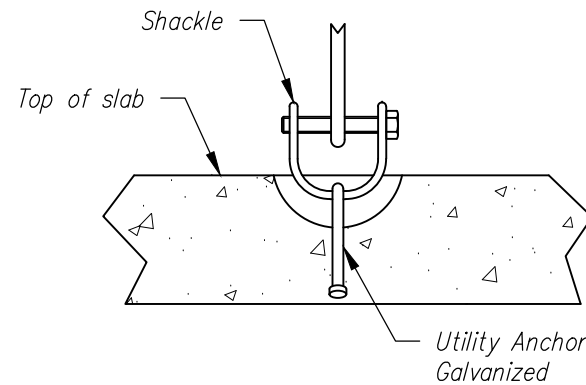

LIFTING DETAIL

1	08/05/19	REVISE SIZE AND OPENING	YA
Rev.	Date	Description	By
REVISIONS			



Concrete Systems Inc.
9 Commercial St., Hudson, NH, 03051
Phone 603-889-4163
Fax 603-889-2417

STATE AGENCY

Drawn By
Y AWUM
Concrete Cu. Yd.
0.90
Approved By
Date
4/29/2019
Weight in Tons
1.82

L D RUSSO INC
MERRIMACK POLICE HEADQUATERS
MERRIMACK, MA

A

72"x64"x10" NSTAR TRANSFORMER PAD (75 TO 500KVA)
Drawing No. S23912-TP1

REV
1

Quantity: 1 Project No: N/A SHEET 1 OF 1