



GENERAL NOTES:

1. DESIGNED FOR H-20 LOAD.
2. CONCRETE STRENGTH $F'_C = 5000$ PSI.
3. REINFORCING STEEL: ASTM A615 (REBAR) GRADE 60
4. COVER TO REINFORCING: 1 1/2" U.N.O.
5. EXCLUSIONS: INSERTS/PENTA BOLTS FOR PLYWOOD COVERING (BY OTHERS).

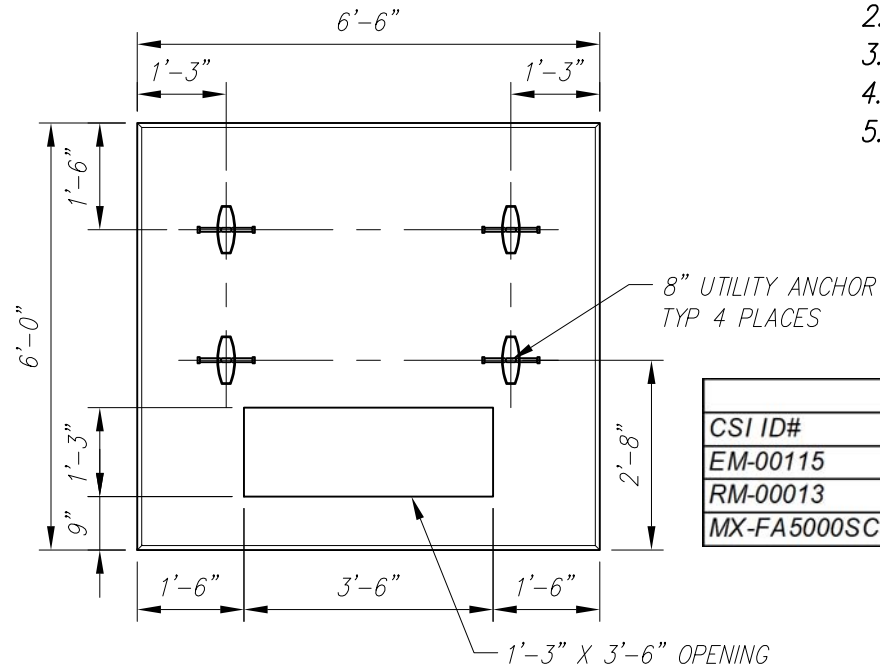

PLAN

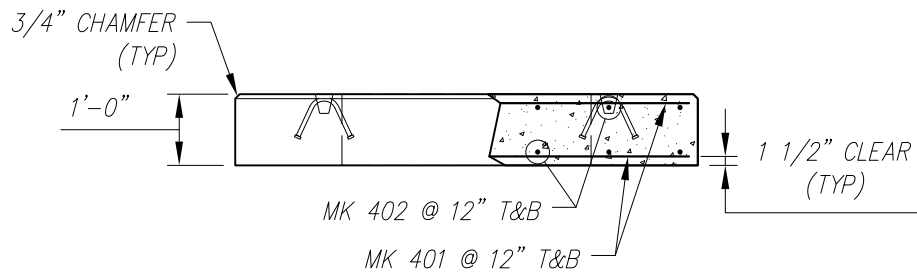


ELEVATION

BILL OF MATERIALS / EMBEDS

CSI ID#	DESCRIPTION	QTY	UM	COMMENTS
EM-00115	8" UTILITY ANCHOR GALV	4	EA	
RM-00013	REBAR #4 BLACK- GR 60	112	LB	
MX-FA5000SC30	MIX DSGN FLY ASH 5000 SELF COMPACT	1.28	CY	

Rebar Schedule

MK	QTY	LENGTH
401 #4	14	6' - 3"
402 #4	14	5' - 9"

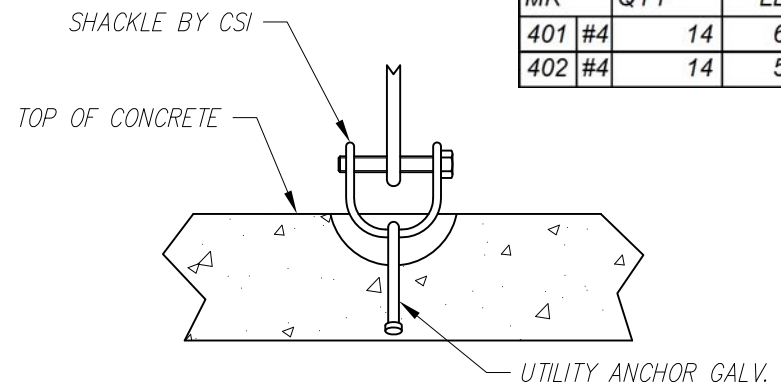

LIFTING DETAIL



Concrete Systems Inc.
9 Commercial St., Hudson, NH, 03051
Phone 603-889-4163
Fax 603-889-2417

STATE AGENCY

NSTAR ELECTRIC

Drawn By
AAK
Concrete Cu. Yd.
1.28
Approved By

Date
08/09/2017
Weight in Tons
2.60
Date

A

72"x78"x12" NSTAR TRANSFORMER PAD (UP TO 300KVA)
Drawing No. NS72X78TP

REV
0

Quantity:

Project No:

SHEET 1 OF 1