
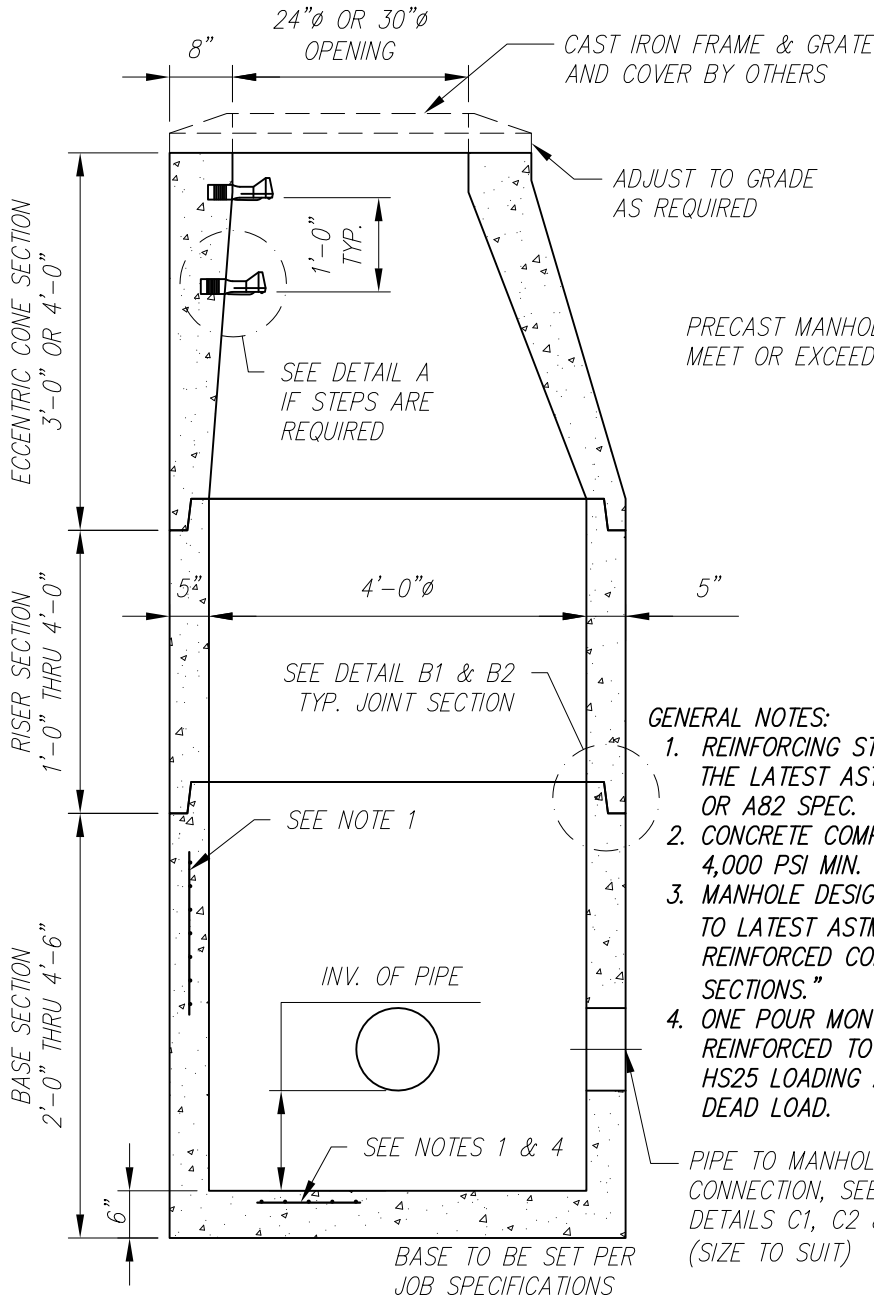


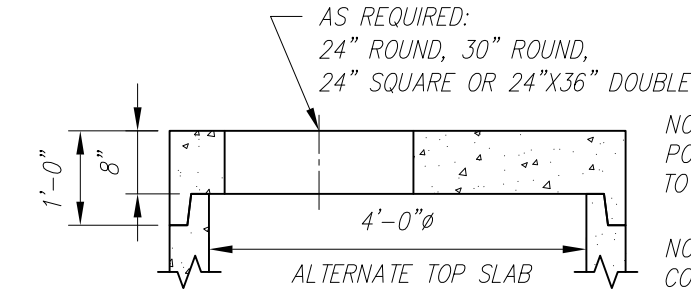

GENERAL NOTES:

1. REINFORCING STEEL CONFORMS TO THE LATEST ASTM A1064, A615 OR A82 SPEC.
2. CONCRETE COMPRESSIVE STRENGTH 4,000 PSI MIN.
3. MANHOLE DESIGN SPECS CONFORM TO LATEST ASTM C478 "PRECAST REINFORCED CONCRETE MANHOLE SECTIONS."
4. ONE POUR MONOLITHIC BASE SECTION REINFORCED TO MEET OR EXCEED HS25 LOADING AND SUPERIMPOSED DEAD LOAD.

PIPE TO MANHOLE
CONNECTION, SEE
DETAILS C1, C2 & C3
(SIZE TO SUIT)

PIPE TO MANHOLE CONNECTIONS	POLYPROPYLENE		MANHOLE	STEP	A
	MORTAR		SECTION JOINT		B1
	BUTYL RUBBER		SECTION JOINT		B2
PIPE TO MANHOLE CONNECTIONS	BY CONTRACTOR		PIPE SIZE		C1
	FLEXIBLE SLEEVE		PIPE SIZE		C2
	COMPRESSION GASKET [CAST - IN]		PIPE SIZE		C3

TYPICAL 4'Ø STORM DRAIN MANHOLE

CONTRACTOR:

Contract No.

ENGINEER:

Date

JOB:

Drawing No.

LOCATION:

MH4-DM
Revision



Concrete Systems Inc.
9 Commercial St., Hudson, NH, 03051
Phone 603-889-4163
Fax 603-889-2417