


NOTE: STEEL REINFORCED COPOLYMER
POLYPROPYLENE PLASTIC STEP
CONFORMS TO LATEST
ASTM C478

NOTE: BUTYL RUBBER SECTION JOINT
CONFORMS TO LATEST
ASTM C443 SPEC. AND
FED SPEC. SS-S-210A

OPENING DIMENSIONS:
24" ROUND, 30" ROUND,
24"x36" DOUBLE,
24"x48" DOUBLE,
24" SQUARE

PRECAST MANHOLE IS DESIGNED
TO MEET OR EXCEED HS25 LOADING

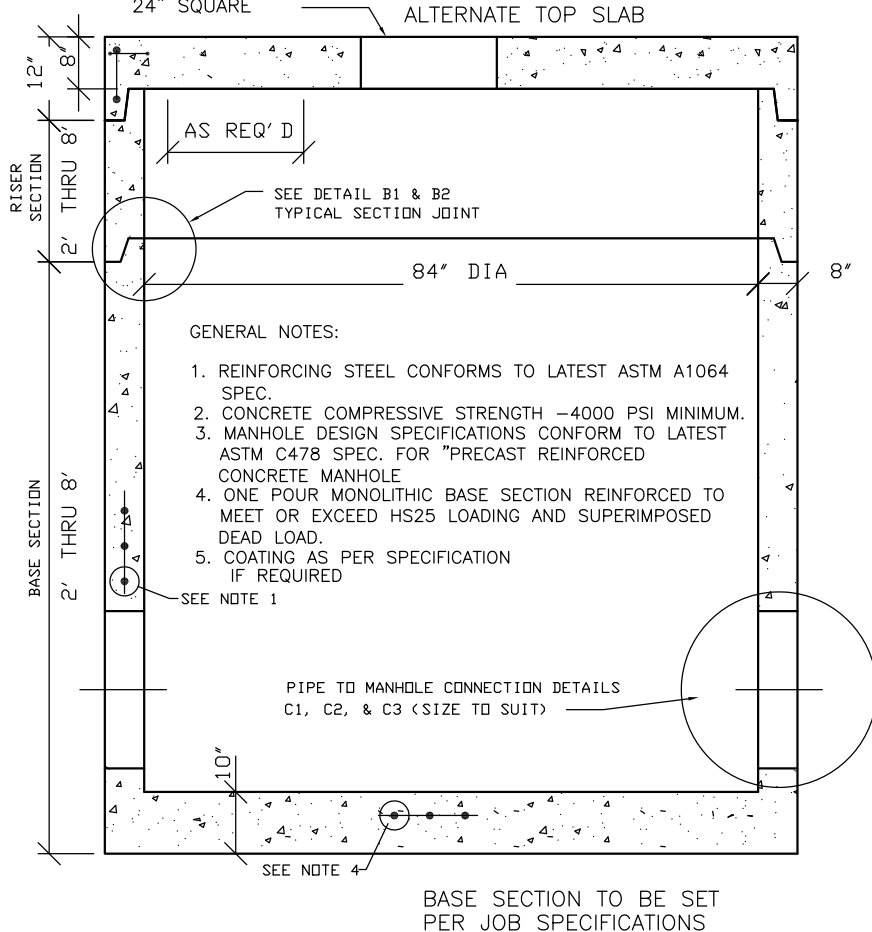

PIPE TO MANHOLE CONNECTIONS

PIPE TO MANHOLE CONNECTIONS	POLYPROPYLENE		MANHOLE	STE	
	MORTAR		SECTION JOINT		
	BUTYL RUBBER		SECTION JOINT		
	BY CONTRACTOR		PIPE SIZE		
PIPE TO MANHOLE CONNECTIONS	MORTAR		PIPE SIZE		
	FLEXIBLE SLEEVE		PIPE SIZE		
PIPE TO MANHOLE CONNECTIONS	COMPRESSION GASKET [CAST - IN]		PIPE SIZE		
			PIPE SIZE		

TYPICAL 7'Ø STORM DRAIN MANHOLE

CONTRACTOR:

Contract No.

ENGINEER:

Date

JOB:

Drawing No.

MH7-DM

LOCATION:

Revision



Concrete Systems Inc.

9 Commercial St., Hudson, NH, 03051

Phone 603-889-4163

Fax 603-889-0039