PRODUCT: Q2-	KERNEL-L	WEIGHT: 20	02 lbs. CLOAD IF OVER 6000 Lbs.)			ı
QUANTITY:	CONCRE O NATURAL O MISSION WHITE CUSTOM:	_	CONCRETE TEXTURE: SANDSTONE SMOOTH SEALER: PERMASHIELE	is give to QCP to produce this o	nis drawing "approved"	Date or "no exception taken" authorizat a 1/4" tolerance.
	E = EXPOSE INSTALLATION II ALL EDGES TO I MANUFACTURIN ANCHORING MET GFRC	IG TOLERANCE ±	THERS. 1/4".	-	-54 9/16"——	-
(2) 1/2"DIA. FERRL LOOP INSERTS (FX-	-5)	26 3/4"	7 11/16" 15 11/16" 7 11/16"	30 15/16"		
	ВОТТ	OM VIEW		PL	AN VIEW	
FACE COAT: 1/8 BACK COAT: 3/4	" ТНК.	- 31"	±3/4" YP.	17 1/8" 1/2"DIA. x 4 1/2"L. BOLT 2"DIA. x 5"DEEP GROUT POCKETS (BY OTHERS)	27 5/8"	FOOTING (BY OTHERS)
	SECT	ION VIEW		ELEV	ATION VIE	W
HARDY		LIST				
1/2"	TYPE DIA. x 4 1/2"L. AND	CHOR BOLT	_			
	SIKAFLEX				DATE	FILENC
	20	PLAN TYPE	CONSTRUCTION PLAN		1/2/24	FILE NO. GFRC-KERNEL-L
W		PRODUCT	Q2-KERNEL-L SEATIN	IG KERNEL	SCALE 1/2" = 1'	DRAWN BY:
www. qcp-	corp.com	PROJECT NAME			PC. NO.	QC ITEM NO.

PRODUCT: Q2-	-KEL254217S WEIGHT: 9	47 lbs. FLOAD IF OVER 6000 Lbs.)			ı	
QUANTITY:	CONCRETE COLOR: NATURAL FRENCH GRE' MISSION WHITE LATTE CUSTOM:	CONCRETE TEXTURE: CRAFTSMANS ETCH STRATA SEALER: PERMASHIELD 4200	Authorized Signa By signing above or stamping this is give to QCP to produce this dr	s drawing "approved" o		tion
	GENERAL PRODUCT NOTES E = EXPOSED FINISHED INSTALLATION IS REQUIRED BY ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE :	SURFACE OTHERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING		2" TYP. 14 7/16" 5 9/16" TYP.	-42 1/	/2"————————————————————————————————————		25 9/16"
1/2"DIA. x 4 ANCHOR 2"DIA. X 5 GROUT POC BY OTI	BOLT 5"DP. KETS	#3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	9 3/16" 23 13/ FLAT 42 1/	16"		17 1/8"
	TYPE DIA. x 4 1/2"L. ANCHOR BOLT SIKAFLEX					
	PLAN TYPE	CONSTRUCTION PLAN		DATE 1/24/25	FILE NO. Q2-KEL254217S	SHEET
UC	PRODUCT	Q2-KEL254217S SEATING F	KERNEL	SCALE 5/8" = 1'	DRAWN BY:	OF

PC. NO.

QC ITEM NO.

www.qcp-corp.com

PROJECT NAME

PRODUCT: Q2-KE	L254217S-LC	WEIGHT: 19	02 lbs. LOAD IF OVER 6000 Lbs.)			1	
QUANTITY:	CONCRETI O NATURAL O MISSION WHITE O CUSTOM:	FRENCH GREY LATTE	CONCRETE TEXTURE: SANDSTONE GFRC HONED SEALER: PERMASHIELD 420	Authorized Signa By signing above or stamping th is give to QCP to produce this di	is drawing "approved" or "no		ion
	GENERAL PROJECT STATES OF THE	O FINISHED S REQUIRED BY O E EASED.	THERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING	±3/4"	13/16"	2" TYP. 14 7/16" 5 9/16" TYP.		/2"	2	5 9/16"
	BOTTC ±3/4" ¬	OM VIEW	FACE COAT: 1/8"THK.	PLAN \	VIEW		
FOAM RIB FOR REINFORMENT 1/2"DIA. x 4 1/2 ANCHOR BOIL 2"DIA. X 5"D			BACK COAT: 3/4"THK. 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	9 3/16" 23 13/ FLAT 42 1/	/16"		17 1/8"
GROUT POCKET BY OTHER	rs –⁄	Walv nc	Tooling of online	ELEVATIO	WAIV NC		
HARDW.	TYPE	LIST	_				
2 1/2°DIA	. x 4 1/2°L. ANCH SIKAFLEX	IOR BOLT	_				
		PLAN TYPE	CONSTRUCTION PLAN		DATE 1/24/25 Q	FILE NO. 2-KEL254217S-L(SHEET
くし	V	PRODUCT	Q2-KEL254217S-LC SEATI	NG KERNEL	SCALE 5/8" = 1'	DRAWN BY:	OF

1

QC ITEM NO.

PC. NO.

PROJECT NAME

www.qcp-corp.com

PRODUCT: C)2-KEL286317S	WEIGHT: 1,	537 lbs. LOAD IF OVER 6000 Lbs.)			
QUANTITY: _	NATURAL MISSION WHITE		CONCRETE TEXTURE: CRAFTSMANS ETCH STRATA SEALER: PERMASHIELD 4:	is give to QCP to produce this o	ature is drawing "approved" or "no excet rawing as shown within a 1/4" tole	
	GENERAL PRO E = EXPOSE INSTALLATION IS ALL EDGES TO B MANUFACTURING	D FINISHED S REQUIRED BY C BE EASED.	THERS.			
	35 3/		2" TYP.	63 1	/4"	
(2) 1/2"DIA. FERRUL LOOP INSERTS (FX- FOR ANCHORIN	5) 🖳		7 13/16" 7 13/16" 15 11/16" 17P.			28 1/4*
	воттом	VIEW		PLAN	VIEW	
1/2"DIA. x 4 1 ANCHOR E 2"DIA. X 5 GROUT POCK BY OTH	ODP.	A A S	3 REBARS AT 12"O.C. IAX EACH WAY /2"DIA. X 2 3/4"L. ERRULE INSERTS (FX-5) IKAFLEX OOTING BY OTHERS	-12 1/2" - 35 3/ FLAT	4"	15 1/16" —
	SECTION	VIEW		ELEVATION	ON VIEW	
QTY	YARE L TYPE 72"DIA. x 4 1/2"L. ANCH SIKAFLEX					
	O O	PLAN TYPE	CONSTRUCTION PLAN			FILE NO. SHEET KEL286317S 1
WWW.gcr	o-corp.com	PRODUCT	Q2-KEL286317S SEATING	G KERNEL	SCALE 1/2" = 1' PC. NO.	DRAWN BY: OF QC ITEM NO.
deb	p(()	PROJECT NAME				[1

		OAD IF OVER 6000 Lbs.)	Authorized Sig	ınature	Date
UANTITY:	CONCRETE COLOR: NATURAL FRENCH GREY MISSION WHITE LATTE CUSTOM:	CONCRETE TEXTURE: SANDSTONE GFRCHONED SEALER: PERMASHIELD 42	By signing above or stampin is give to QCP to produce the	gi this drawing "approved" or "no e is drawing as shown within a 1/4" i	ception taken" authorization
	GENERAL PRODUCT NOTES: E = EXPOSED FINISHED SUINSTALLATION IS REQUIRED BY OT ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE ±1/GFRC	HERS.			
	35 3/4"	2" TYP.	63	5 1/4"————	-
) 1/2"DIA. FERRULE OP INSERTS (FX-5) FOR ANCHORING	±3/4"	7 13/16" 7 13/16" TYP. 6 1/4" TYP.			2
	BOTTOM VIEW		PLAI	N VIEW	
FOAM RIB FO REINFORMEN 8"	1/ FEI		12 1/2"	3/4"	
1/2"DIA. x 4 1/2 ANCHOR BOL 2"DIA. X 5"DF GROUT POCKET BY OTHER	P. FO	OTING BY OTHERS		ÁT	-15 1/16" -
ANCHOR BOL 2"DIA. X 5"DF GROUT POCKET	P. FO	OTING BY OTHERS			-15 1/16" -
ANCHOR BOL 2"DIA. X 5"DIG GROUT POCKET BY OTHER	SECTION VIEW	OTING BY OTHERS		5 1/4"—————	-15 1/16
ANCHOR BOL 2"DIA. X 5"DF GROUT POCKET BY OTHER	P. SECTION VIEW	OTING BY OTHERS		5 1/4"—————	-15 1/16
ANCHOR BOL 2"DIA. X 5"DF GROUT POCKET BY OTHER	SECTION VIEW SECTION VIEW TYPE TOIA. x 4 1/2"L. ANCHOR BOLT SIKAFLEX			5 1/4"—————	-15 1/16
ANCHOR BOL 2"DIA. X 5"DI GROUT POCKET BY OTHER	SECTION VIEW SECTION VIEW TYPE "DIA. x 4 1/2"L. ANCHOR BOLT	CONSTRUCTION PLAN		5 1/4"————————————————————————————————————	

PROJECT NAME

PRODUCT: Q2-K	EL294724S WEIGHT: 1	.638 lbs. FLOAD IF OVER 6000 Lbs.)			ı	
QUANTITY:	CONCRETE COLOR: NATURAL FRENCH GRE' MISSION WHITE LATTE CUSTOM:	CONCRETE TEXTURE: CRAFTSMANS ETCH STRATA SEALER: PERMASHIELD 420	Authorized Signa By signing above or stamping th is give to QCP to produce this dr	is drawing "approved" o		ration
	GENERAL PRODUCT NOTES E = EXPOSED FINISHED INSTALLATION IS REQUIRED BY ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE 1	SURFACE OTHERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING	20 5/8"	2" TYP. 13 1/8" 6 9/16" TYP. 8 5/16" TYP.	46 13/	/16"		29 11/16"
	BOTTOM VIEW		PLAN \	/IEW		
1/2"DIA. x 4 1/2". ANCHOR BOLT 2"DIA. X 5"DP. GROUT POCKETS BY OTHERS	SECTION VIEW SECTION VIEW ARE LIST TYPE A. X 4 1/2°L. ANCHOR BOLT	#3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	20 5/8 FLAT 46 13/	"	-14 3/8" -	24"
1	SIKAFLEX PLAN TYPE	CONSTRUCTION PLAN		DATE	FILE NO.	SHEET
QC	PRODUCT	Q2-KEL294724S SEATING	i KERNEL	1/24/25 SCALE 5/8" = 1'	Q2-KEL294724S DRAWN BY:	1 OF
www.qcp-co	orp.com PROJECT NAME	, -	<u> </u>	PC. NO.	QC ITEM NO.	1

	<u>l</u>	FLOAD IF OVER 6000 Lbs.)	 		
QUANTITY:	CONCRETE COLOR: NATURAL FRENCH GREY MISSION WHITE LATTE CUSTOM:	CONCRETE TEXTURE: SANDSTONE GFRCHONED SEALER: PERMASHIELD 42	is give to QCP to produce this di	NCUPE s drawing "approved" or "no exception ta awing as shown within a 1/4" tolerance.	ate ken" authorization
	GENERAL PRODUCT NOTES: E = EXPOSED FINISHED S INSTALLATION IS REQUIRED BY C ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE ± GFRC	SURFACE DTHERS.			
	20 5/8"	- 2" TYP.	46 13,	/16"	
) 1/2"DIA. FERRULE OP INSERTS (FX-5)— FOR ANCHORING	±3/4"	6 9/16" TYP. 8 5/16" TYP.			29 1
	BOTTOM VIEW		PLAN \	/IEW	
FOAM RIB FOR REINFORMENT	±3/4"	FACE COAT: 1/8"THK. BACK COAT: 3/4"THK. 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5)			
8" 1/2"DIA. x 4 1/2". ANCHOR BOLT 2"DIA. X 5"DP. GROUT POCKETS BY OTHERS	SECTION VIEW	SIKAFLEX FOOTING BY OTHERS	20 5/8 FLAT 46 13,		
/2"DIA. x 4 1/2"	SECTION VIEW SECTION VIEW OIA. x 4 1/2"L ANCHOR BOLT	SIKAFLEX	46 13,	/16"	
/2"DIA. x 4 1/2"	SECTION VIEW	SIKAFLEX	46 13,	/16"	NO.
/2"DIA. x 4 1/2"	SECTION VIEW SECTION VIEW SECTION VIEW SIKAFLEX	SIKAFLEX FOOTING BY OTHERS	= 46 13,	/16" ————————————————————————————————————	NO. 4724S-LC

PRODUCT: Q2-KEL303517S	WEIGHT: 890 lbs. (CUSTOMER TO OFFLOAD IF OVE	ER 6000 Lbs.)		
QUANTITY: CONCRE' NATURAL MISSION WHITE CUSTOM:	○ FRENCH GREY ○ LATTE	CONCRETE TEXTURE: O CRAFTSMANS ETCH O STRATA EALER: PERMASHIELD 4200 SEA	Authorized Signature By signing above or stamping this drawing "approved" or "no is give to QCP to produce this drawing as shown within a 1/4	Date exception taken" authorization " tolerance.
E = EXPOSE INSTALLATION II ALL EDGES TO I	ODUCT NOTES: ED FINISHED SURFACE S REQUIRED BY OTHERS. BE EASED. NG TOLERANCE ±1/4".	E		
	18 1/8" 2" TYP.	7 7/8" TYP. 7 5/16" TYP.	35"	30 5/16"
ВОТТ	OM VIEW		PLAN VIEW	
1/2"DIA. x 4 1/2". ANCHOR BOLT 2"DIA. X 5"DP. GROUT POCKETS BY OTHERS SECTI	ION VIEW	#3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) — SIKAFLEX FOOTING BY OTHERS	7 11/16" 18 1/8" 9 3/11 35" ELEVATION VIEW	17 1/8"
HARDWARE I	LIST			

I	HARDWARE LIST			
QTY	TYPE			
2	1/2"DIA. x 4 1/2"L. ANCHOR BOLT			
1	SIKAFLEX			

QCP
www.qcp-corp.com

		DATE	FILE NO.	SHEET
PLAN TYPE	CONSTRUCTION PLAN	1/24/25	Q2-KEL303517S	1
PROPUST	00 1/51 0005/30 1 054 710 0 1 1/550 151	SCALE	DRAWN BY:	'
PRODUCT	Q2-KEL303517S SEATING KERNEL	5/8" = 1'		OF
PROJECT NAME		PC. NO.	QC ITEM NO.	1
FROJECT NAME				'

WEIGHT: 180 lbs. (CUSTOMER TO OFFLOAD IF OVER 6000 Lbs.) PRODUCT: Q2-KEL303517S-LC Authorized Signature Date CONCRETE COLOR: CONCRETE TEXTURE: By signing above or stamping this drawing "approved" or "no exception taken" authorization is give to QCP to produce this drawing as shown within a 1/4" tolerance. ○ NATURAL O FRENCH GREY SANDSTONE ○ GFRC HONED QUANTITY: _ O CUSTOM: SEALER: PERMASHIELD 4200 SEALER **GENERAL PRODUCT NOTES:** E = EXPOSED FINISHED SURFACE INSTALLATION IS REQUIRED BY OTHERS. ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE ±1/4". GFRC – 18 1/8**"** — - 35" — 14 1/8" TYP. 15 11/16" 30 5/16" 7 7/8" TÝP. (2) 1/2"DIA. FERRULE 7 5/16" LOOP INSERTS (FX-5) FOR ANCHORING TYP. ±3/4" **BOTTOM VIEW** PLAN VIEW FACE COAT: 1/8"THK. ±3/4" BACK COAT: 3/4"THK. FOAM RIB FOR REINFORMENT 1/2"DIA. X 2 3/4"L. 17 1/8" FERRULE INSERTS (FX-5) SIKAFLEX 18 1/8" FLAT | 7 11/16" | 9 3/16" 1/2"DIA. x 4 1/2". ANCHOR BOLT - 35" 2"DIA. X 5"DP. FOOTING BY OTHERS GROUT POCKETS SECTION VIEW **ELEVATION VIEW** BY OTHERS

HARDWARE LIST		
QTY	TYPE	
2	1/2"DIA. x 4 1/2"L. ANCHOR BOLT	
1	SIKAFLEX	

QCP
www.qcp-corp.com

	CONCERNICATION BY AN	DATE	FILE NO.	SHEET
PLAN TYPE	CONSTRUCTION PLAN	1/24/25	Q2-KEL303517S-L0	1
		SCALE	DRAWN BY:	'
PRODUCT	Q2-KEL303517S-LC SEATING KERNEL	5/8" = 1'		OF
PROJECT NAME		PC. NO.	QC ITEM NO.	1

PRODUCT: Q2-KE	L367217S WEIGHT	2,285 lbs. 10 OFFLOAD IF OVER 6000 Lbs.)		ı	
QUANTITY:	CONCRETE COLOR NATURAL O FRENCI MISSION WHITE LATTE CUSTOM:	, , ,	ng this drawing "approved"	Date or "no exception taken" authoriza n a 1/4" tolerance.	lion
	GENERAL PRODUCT NO E = EXPOSED FINISH INSTALLATION IS REQUIRED ALL EDGES TO BE EASED. MANUFACTURING TOLERAN	D SURFACE BY OTHERS.			
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING	40 13/16"————————————————————————————————————	2" TYP. 20 13/16" TYP. 7 7/8" TYP.	1/16"	-	36 5/8"
	BOTTOM VIEW	PLA	N VIEW		
1/2"DIA. x 4 1/2"	SECTION VIEW TYPE x 4 1/2"L. ANCHOR BOLT	FOOTING BY OTHERS FOOTING BY OTHERS FLEVA	13/16"	 17 1/8"	17"
1	SIKAFLEX PLAN TYPE	CONSTRUCTION PLAN	DATE 1/24/25	FILE NO. Q2-KEL367217S	SHEET
QU	PRODUCT	Q2-KEL367217S SEATING KERNEL	SCALE 3/8" = 1'	DRAWN BY:	0F
www.qcp-cor	p.com PROJECT NAI	E	PC. NO.	QC ITEM NO.	1


PRODUCT: Q2	-KEL367217S-LC	WEIGHT: 2 (CUSTOMER TO OF	B1 lbs. FLOAD IF OVER 6000 Lbs.)			ı	
QUANTITY:	O NATURAL	-	CONCRETE TEXTURE: SANDSTONE GFRCHONED SEALER: PERMASHIELD 420	is give to QCP to produce this dr	is drawing "approved" of	Date or "no exception taken" authorizati a 1/4" tolerance.	on
	E = EXPOSI INSTALLATION ALL EDGES TO	ODUCT NOTES: ED FINISHED : IS REQUIRED BY (BE EASED. NG TOLERANCE ±	SURFACE DTHERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5)- FOR ANCHORING		5 13/16"	2" TYP. 20 13/16" 10 7/16" TYP. 7 7/8" TYP.	72 1/	(16"		36 5/8"
	ВОТТО	OM VIEW		PLAN	VIEW		
FOAM RIB F REINFORME 1/2"DIA. x 4 1/ ANCHOR BC 2"DIA. X 5"I GROUT POCKE BY OTHE	NT 8" 2".	ON VIEW	ACE COAT: 1/8"THK. ACK COAT: 3/4"THK. 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	14 1/16" 40 13/ ————————————————————————————————————	/16" ————	17 1/8"	17"
HARD	WARE	LIST					
2 1/2	"DIA. x 4 1/2"L. ANO SIKAFLEX	CHOR BOLT					
	20	PLAN TYPE	CONSTRUCTION PLAN		DATE 1/24/25	FILE NO. Q2-KEL367217S-L0	SHEET
MANANA ACC		PRODUCT	Q2-KEL367217S-LC SEATI	NG KERNEL	SCALE 3/8" = 1' PC. NO.	DRAWN BY: QC ITEM NO.	OF
www.qcp	-corp.com	PROJECT NAME			1 O. NO.	GOTTEM NO.	1

PRODUCT: Q2	-KEL374024S (MOD)	WEIGHT: 1,	,766 lbs. FLOAD IF OVER 6000 Lbs.)		I
QUANTITY:	NATURAL MISSION WHITE		CONCRETE TEXTURE: ORAFTSMANS ETCH OSTRATA SEALER: PERMASHIELD 420	is give to QCP to produce this d	ature Date iis drawing "approved" or "no exception taken" authorization trawing as shown within a 1/4" tolerance.
	E = EXPOSE INSTALLATION IS ALL EDGES TO B	DDUCT NOTES: ED FINISHED S S REQUIRED BY 0 BE EASED. IG TOLERANCE ±	SURFACE DTHERS.		
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING		7 13/16"	2" TYP. 16 7/16" 8 1/4" TYP. 10 7/16" TYP.	/8"SQ. x 5/16"DEEP	37 5/16"
	BOTT	OM VIEW	KNOCKOU FORMED BLACK &	/8°SQ, x 5/16°DELP JT FOR GAME BOARD W/ Q.C. STD. 2°SQ. PLAN ' WHITE TILE W/ 1/8" JT LINES (CENTERED)	VIEW
1/2"DIA. x 4 1/2". ANCHOR BOLT	.4. 4.		#3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX	- 10 5/8" - 17 13/ FLAT	16" 11 15/16" -
2"DIA. X 5"DP. GROUT POCKETS BY OTHERS		ION VIEW	FOOTING BY OTHERS	40 7/	ON VIEW
HARDY 2 1/2	TYPE 2"DIA. x 4 1/2"L. ANC	LIST CHOR BOLT			
	SINAFLEA	PLAN TYPE	CONSTRUCTION PLAN		DATE FILE NO. SHEET
\mathbf{Q}		PRODUCT	Q2-KEL374024S (MOD) SE		7/2/25 Q2-KEL374024S MCD 1 SCALE DRAWN BY:
www.qcp	-corp.com	PROJECT NAME	«2-1\LL0140240 (IVIOD) 3E	-ATINO ALIANEL	5/8" = 1' OF PC. NO. QC ITEM NO. 1

PRODUCT: Q2-	-KEL374024S WEIG	HT: 1,766 lbs. MER TO OFFLOAD IF OVER 6000 lbs.)			ı	
QUANTITY:	CONCRETE COLC NATURAL FRI MISSION WHITE LAT CUSTOM:	NCH GREY CRAFTSMANS ETCH	Authorized Signa By signing above or stamping th is give to QCP to produce this di	is drawing "approved" o	Date or "no exception taken" authoriza a 1/4" tolerance.	ition
	GENERAL PRODUCT I E = EXPOSED FINI: INSTALLATION IS REQUIF ALL EDGES TO BE EASE! MANUFACTURING TOLEF	SHED SURFACE RED BY OTHERS. D.				
(2) 1/2*DIA. FERRULE LOOP INSERTS (FX-5)— FOR ANCHORING	17 13/16" - 13 13/16"		40 7/	16"	37	5/16"
	BOTTOM VI	EW	PLAN \	VIEW		
1/2"DIA. x 4 1/2". ANCHOR BOLT — 2"DIA. X 5"DP. GROUT POCKETS — BY OTHERS	SECTION VI	#3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	-10 5/8" - 17 13/ FLAT - 40 7/ ELEVATIO	16"11		24"
1 1/2 ⁿ	TYPE DIA. x 4 1/2"L. ANCHOR BOL					
	PLANT	YPE CONSTRUCTION PLAN		DATE 1/24/25	FILE NO. Q2-KEL374024S	SH
UC	PROD	Q2-KEL374024S SEATING	KERNEL	SCALE 5/8" = 1'	DRAWN BY:	
	corp.com	<u> </u>		PC. NO.	QC ITEM NO.	4

PRODUCT: Q2-KE	L374024S-LC	WEIGHT: 28	BO Ibs. FLOAD IF OVER 6000 Lbs.)			ı	
QUANTITY:	CONCRE NATURAL MISSION WHITE CUSTOM:		CONCRETE TEXTURE: SANDSTONE GFRC HONED SEALER: PERMASHIELD 4200	Authorized Signa By signing above or stamping th is give to QCP to produce this di SEALER	is drawing "approved" o	Date or "no exception taken" authorizat a 1/4" tolerance.	tion
	E = EXPOSE INSTALLATION I ALL EDGES TO	ODUCT NOTES: ED FINISHED S S REQUIRED BY 0 BE EASED. NG TOLERANCE ±	SURFACE DTHERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING		7 13/16"	2" TYP. 16 7/16" 8 1/4" TYP. 10 7/16" TYP.	40 7/	16"———	37	5/16"
		OM VIEW		PLAN	/IEW		
FOAM RIB FOR REINFORMENT 8" 1/2"DIA. x 4 1/2".	4		FACE COAT: 1/8"THK. BACK COAT: 3/4"THK. 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX	10 5/8" - 17 13/ FLAT			24"
ANCHOR BOLT 2"DIA. X 5"DP. GROUT POCKETS BY OTHERS	4	ION VIEW	FOOTING BY OTHERS		16"———		
2 1/2"DIA	TYPE 1. x 4 1/2°L. AND SIKAFLEX	CHOR BOLT					
	\sim	PLAN TYPE	CONSTRUCTION PLAN		DATE 1/24/25	FILE NO. Q2-KEL374024S-L0	SHEET
YU	M	PRODUCT	Q2-KEL374024S-LC SEATIN	G KERNEL	SCALE 5/8" = 1'	DRAWN BY:	OF
www. qcp-cc	orp.com	PROJECT NAME			PC. NO.	QC ITEM NO.	1

PRODUCT: Q2-KEL424717S	WEIGHT: 1,	677 lbs. FLOAD IF OVER 6000 Lbs.)		l	
QUANTITY: CONCRE O NATURAL O MISSION WHITE O CUSTOM:	_		g this drawing "approved"	Date or "no exception taken" authorizat a 1/4" tolerance.	ion
E = EXPOS INSTALLATION ALL EDGES TO MANUFACTURI	ODUCT NOTES: ED FINISHED S IS REQUIRED BY O BE EASED. NG TOLERANCE ± 24 11/16"	SURFACE DTHERS. 1/4".	5/8"———		42 1/2"
ВОТТ	OM VIEW	PLAN	I VIEW		
2"DIA. X 5"DP. GROUT POCKETS BY OTHERS	ION VIEW	FOOTING BY OTHERS	1/16" AT 5/8"	12 3/16"	17"
— ← ► □ ✓ ← ► E 2 1/2"DIA. x 4 1/2"L. AN 1 SIKAFLEX	CHOR BOLT				
	PLAN TYPE	CONSTRUCTION PLAN	DATE 1/24/25	FILE NO. Q2-KEL424717S	SHEET 1
UUU	PRODUCT	Q2-KEL424717S SEATING KERNEL	SCALE 5/8" = 1'	DRAWN BY:	OF
www.qcp-corp.com	PROJECT NAME		PC. NO.	QC ITEM NO.	1

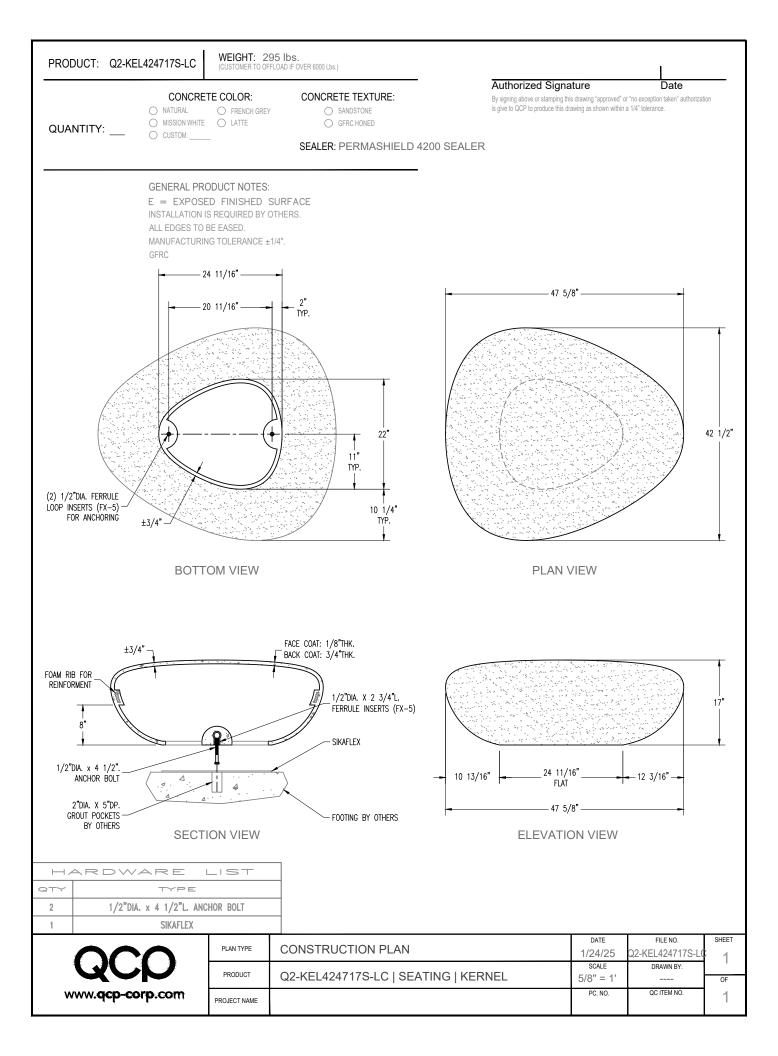

WEIGHT: 2,488 lbs. (CUSTOMER TO OFFLOAD IF OVER 6000 Lbs.) PRODUCT: Q2-KEL485917S Authorized Signature Date CONCRETE COLOR: CONCRETE TEXTURE: By signing above or stamping this drawing "approved" or "no exception taken" authorization is give to QCP to produce this drawing as shown within a 1/4" tolerance. ○ NATURAL O FRENCH GREY ○ CRAFTSMANS ETCH ○ STRATA QUANTITY: _ O CUSTOM: SEALER: PERMASHIELD 4200 SEALER **GENERAL PRODUCT NOTES:** E = EXPOSED FINISHED SURFACE INSTALLATION IS REQUIRED BY OTHERS. ALL EDGES TO BE EASED. MANUFACTURING TOLERANCE ±1/4". — 33 7/8" — 59 1/2" -2" TYP 29 7/8" -48 7/16" 27 1/4" 13 5/8" TYP. (2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) 10 5/8" FOR ANCHORING TYP. **BOTTOM VIEW PLAN VIEW** #3 REBARS AT 12"O.C. MAX EACH WAY 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX 1/2"DIA. x 4 1/2" 33 7/8" ANCHOR BOLT 11 3/4" 13 15/16" FLÁT FOOTING BY OTHERS 2"DIA. X 5"DP. GROUT POCKETS – 59 1/2" – BY OTHERS **SECTION VIEW ELEVATION VIEW** HARDWARE LIST QTY TYPE 1/2"DIA. x 4 1/2"L. ANCHOR BOLT SIKAFLEX 1 FILE NO. SHEET PLAN TYPE CONSTRUCTION PLAN 1/24/25 Q2-KEL485917S SCALE DRAWN BY: PRODUCT Q2-KEL485917S | SEATING | KERNEL 1/2" = 1"OF QC ITEM NO. PC. NO. www.qcp-corp.com 1 PROJECT NAME

PRODUCT: Q2-KE	EL485917S-LC	WEIGHT: 39	97 lbs. FLOAD IF OVER 6000 Lbs.)			ı	
QUANTITY:	CONCRE NATURAL MISSION WHITE CUSTOM:	_	CONCRETE TEXTURE: SANDSTONE GFRC HONED SEALER: PERMASHIELD 4	Authorized Signa By signing above or stamping the signer of stamping the signer to QCP to produce this display to QCP to produce this display.	is drawing "approved" o		ation
	E = EXPOSE INSTALLATION I ALL EDGES TO	ODUCT NOTES: ED FINISHED S IS REQUIRED BY C BE EASED. NG TOLERANCE ±	SURFACE DTHERS.				
(2) 1/2"DIA. FERRULE LOOP INSERTS (FX-5) FOR ANCHORING	±3/4" -	- 33 7/8"	2" TYP. 27 1/4" 13 5/8" TYP. 10 5/8" TYP.	59 1/2		41	8 7/16"
±3/4"- 8" 1/2"DIA. x 4 1/2". ANCHOR BOLT 2"DIA. X 5"DP. GROUT POCKETS- BY OTHERS	3. 4. 4. 4. 4.	TON VIEW	FACE COAT: 1/8"THK. BACK COAT: 3/4"THK. 1/2"DIA. X 2 3/4"L. FERRULE INSERTS (FX-5) SIKAFLEX FOOTING BY OTHERS	PLAN V 11 3/4" - 33 7/8" FLAT 59 1/2 ELEVATION		13 15/16"	17"
2 1/2°DI	TYPE A. x 4 1/2°L. AND SIKAFLEX	LIST					
	· <u>O</u>	PLAN TYPE	CONSTRUCTION PLAN		1/24/25	FILE NO. Q2-KEL485917S-L0	SHEET C 1
WC		PRODUCT	Q2-KEL485917S-LC SEA	TING KERNEL	SCALE 1/2" = 1'	DRAWN BY:	OF
www. qcp-c	orp.com	PROJECT NAME			PC. NO.	QC ITEM NO.	1

GENERAL PRODUCT NOTES:


E = EXPOSED FINISHED SURFACE INSTALLATION IS REQUIRED BY OTHERS.


ALL EDGES TO BE EASED.

MANUFACTURING TOLERANCE ±1/4".


ANCHORING METHOD BY OTHERS


GFRC





BOTTOM VIEW PLAN VIEW





⊢.	ARDWARE LIST				
QTY	QTY TYPE				
2	1/2"DIA. x 4 1/2"L. ANCHOR BOLT				
1	SIKAFLEX				

QCP
www.qcp-corp.com

٦			DATE	FILE NO.	SHEET
	PLAN TYPE	CONSTRUCTION PLAN	4/23/25	Q2-KERNEL-S-LC	
			SCALE	DRAWN BY:	
	PRODUCT	Q2-KERNEL-S-LC SEATING KERNEL	5/8" = 1'		OF
	PROJECT NAME		PC. NO.	QC ITEM NO.	
	PROJECT NAME				