

LED SLIM FLUSH MOUNT

Sora



PRODUCT FEATURES

- Size 5", 7", 9", 11" are available.
- Ultra thin profile, thickness is only 0.56 inch
- Compatible with Surface mounted, recessed Retrofit installation
- 5CCT (2700K-3000K-3500K-4000K-5000K) selectable
- Decorating colorful ring available
- With EM function option (Only for 7")
- Suit for damp or wet location



APPLICATIONS

Applications: Residential, Multifamily, Hospitality

Construction

- Strong polycarbonate housing
- High impact polystyrene diffuser.
- Acrylic light guide
- Stamped aluminum heat sink

Electrical

- Constant current driver
- 120V input, Triac dimming
- 10%-100% Dimming Range


Compliance

- ETL listed for damp location or wet location
- Ambient operating temperatures -20C to 40C
- LED complies with LM-79 and LM-80 -T24 Qualified

Ordering Information

Model No	Power	CCT	Lumen output @3000K	CRI	Beam Angle	Input	Dimming
DSFUSH-Gen1-5-9.5w-CCT	10 W	2700K-3000-3500-4000-5000K	800 lm	90+	110°	120V	Triac
DSFUSH-Gen1-7-12w-CCT	12 W	2700K-3000-3500-4000-5000K	1000 lm	90+	110°	120V	Triac
DSFUSH-Gen1-9-18w-CCT	18 W	2700K-3000-3500-4000-5000K	1260 lm	90+	110°	120V	Triac
DSFUSH-Gen1-12-26w-CCT	26 W	2700K-3000-3500-4000-5000K	2000 lm	90+	110°	120V	Triac


Accessory

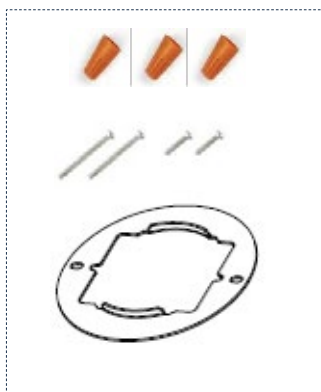

Standard
J-BOX Install Kits



Option 4'' Retrofit
Kits

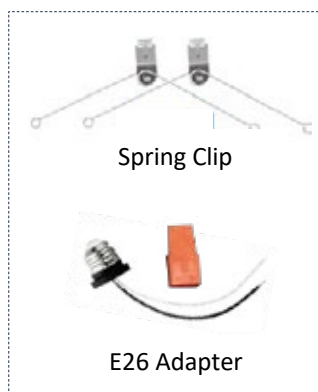


Option 6'' Retrofit
Kits



Option Decorative
Ring

LED SLIM FLUSH MOUNT DSFUSH

Dimension

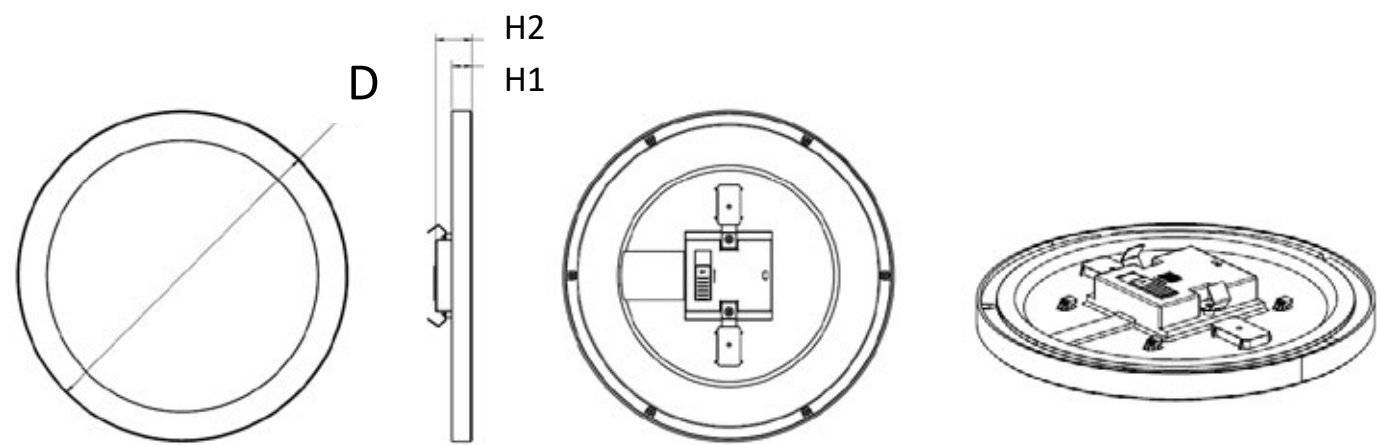

Size	D	H1	H2
5"	5.08"	0.56"	1.04"
7"	7.48"	0.56"	1.04"
9"	9.00"	0.56"	1.04"
11"	11.00"	0.56"	1.04"