

WC-200 700mA

LED Driver



Job Information

Type:

Catalog #:

Project:


Comments:

Prepared by:

Electrical Specifications:


Output Power Max	Output Voltage	Output Current	Min. Start Temp.	Tcase Temp. Max.	Input Current	Input Power	THD Max.	Power Factor Min.	Efficiency Max
(W)	(V)	(A)	(F/C)	(F/C)	(A)	(W)	(%)		(%)
200	171-265v	700mA +/- 5%	-40/-40	194/90	1.78@120V 0.78@277V	215	<20	>0.9	93

Wiring:

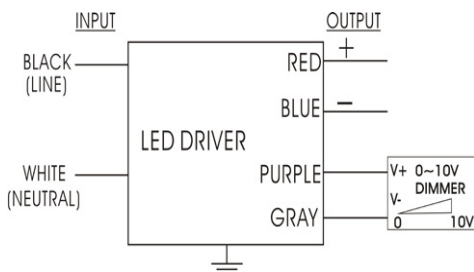

Black	White	Green	Red	Blue	Purple	Gray
5.9"	5.9"	5.9"	5.9"	5.9"	7.1"	7.1"

Physical:

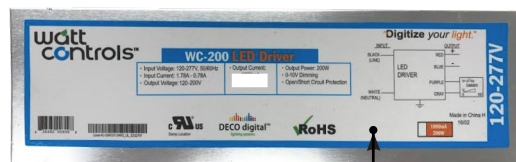

Hot Spot

Overall (L)	Width (W)	Height (H)	Mounting (M)
24.1 cm	6.7 cm	4.06 cm	22.6 cm
9.5"	2.64"	1.6"	8.9"

Safety & Performance

- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of ≤75°C; 3 yrs based on max case temp of 90°C*

- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

Installation

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded