

# DCLX-LED

## LED Exit Sign/Backup Battery

Commercial, retail and industrial facilities that require battery backup emergency exit signage. Economical and attractive DCLX series uses a thermoplastic housing and solid-state electronics to offer both reliability and low cost performance.

### FEATURES

#### PERFORMANCE

- Completely self-contained
- Fully automatic design
- Push to test switch
- Automatic, low-voltage disconnect (LVD)
- Wattage (0.57W-0.68W)
- 120 or 277 VAC operation
- Injection molded, V-O flame retardant, high impact, thermoplastic housing
- Charge rate/power-on LED indicator light
- Energy consumption of less than 3 watts
- LED lamp life of 25+ years
- Listed for damp location
- Universal mounting canopy for side or top installation
- Standard AC and emergency units available
- Ni-Cad battery on emergency (EM) units
- Input wattage is 4.9W
- Energy Star Rated
- 5 Year Warranty



USA  
Buy American  
Act Compliant


5Yr  
Warranty  
(10 optional)

### ORDERING INFORMATION

DECO / 2W / 120 /  
SERIES PART # WATTAGE LETTERING VOLTAGE

FIXTURE SERIES	PART NUMBER	WATTAGE	LETTERING	VOLTAGE
DECO	82205	2W	Green	120-277V
DECO	82208	2W	Red	120-277V

Dimensions

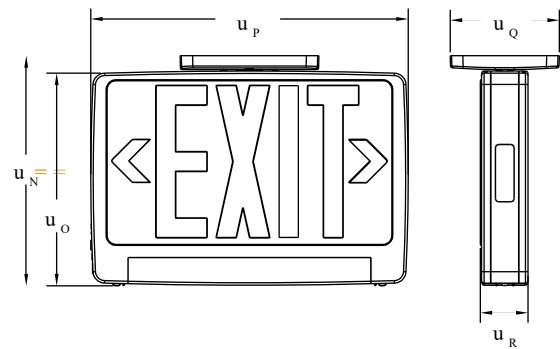

$u_N =$	$u_O =$	$u_P$	$u_Q$	$u_R$
9.13"	8.25"	12.56"	4.38"	1.88"