

Ronda

LED Round Light

FEATURES

Round frame adopt extrusion aluminum, better for heat dissipation, higher hardness, strong structure

- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel
- Performance engineered optical lens assembly delivers unique beam angles and reduces glare
- Class II/P driver, standard with 0-10V, Triac dimming is optional.
- 50,000+ Hours LED Life Expectancy.
- Power factor: >0.98.
- Down 100% lighting.
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- Damp location.
- UL/cUL us listed.
- Ambient Temperature: -20 ~ 45 (-46°F to +104°F)



Client:	
Order#:	
Project:	
Type:	



PERFORMANCE DATA

Product ID	Wattage	Lumens	Efficacy	CCT	Diameter	Height
Ronda	25, 30, 35W	3325-4025	95-115 lm/w	30K, 35K, 40K or 35K, 40K, 50K	16"	2.17"
	30, 40, 50W	4750-5750			23.60"	
	40, 60, 80W	7600-9200			31.50"	
	60, 80, 100W	9500-11500			47.24"	

ORDERING INFORMATION

Ronda / **GEN2** / **LENS** / **WATT** / **DIAMETER** / **MOUNT** / **CCT** / **ACCESSORIES** / **WARRANTY**
 SERIES PHASE LENS WATT DIAMETER MOUNT CCT ACCESSORIES WARRANTY


FIXTURE SERIES	
Ronda	Ronda LED Round Light
PHASE	
GEN2	Generation II, Multi Watts, Multi CCT
LENS	
LX	No Lens
LM	Milky Lens / Perforation Cover
LD	Clear Lens
LL	Louver
WATTS	
35	35W
50	50W
80	80W
100	100W
DIAMETER	
16	16"
24	24"
32	32"
48	48"

MOUNT	
B	Surface/Suspended
CCT	
30	3000K
35	3500K
40	4000K
50	5000K
VK	CCT Tunable
ACCESSORIES	
S	Motion Sensor
EM	Emergency
WARRANTY	
5	5 Year Warranty (Standard)
10	10 Year Warranty

INSTALLATION


Suspended

The canopy is standard with 6FT long

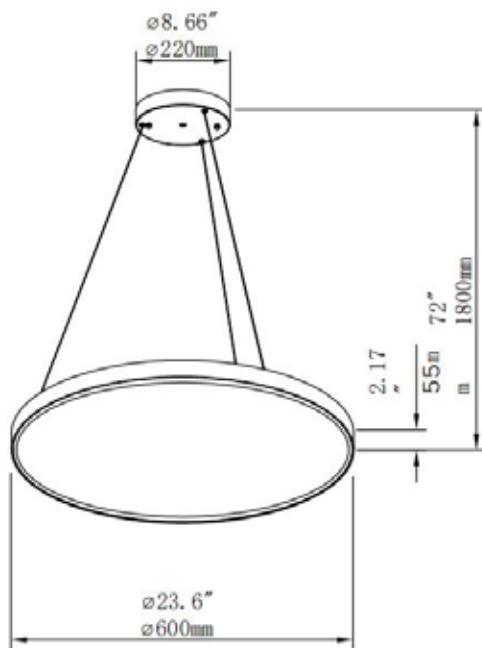

Surface

The kit to be ordered separated

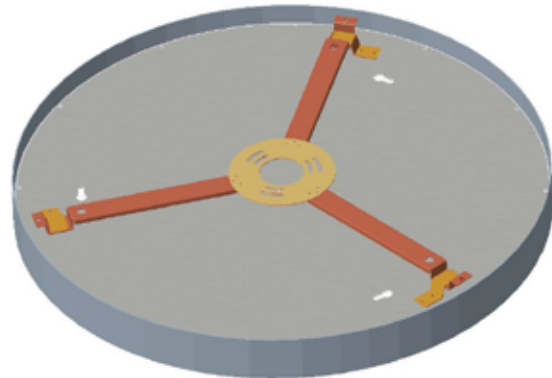

Option 1: 8W 90Mins EM Kit

