

Project	Catalog #
Distributor	Type
Prepared by	Date



ORHB

G2 UFO High Bay Series

T1-G2RHBLED-MW

The **Orhb Series** is our new generation LED high bays featuring a thinner and circular profile with an upgraded modern look to the traditional high bay. Designed with easy installation of sensors at the face of the fixture. It is an ideal application for any high ceiling facility looking to improve its aesthetic while being energy-efficient. The Orhb Series has an IP65 protection grade that makes it suitable for wet locations and environments with ambient temperature of up to 122°F. This fixture comes equipped with closed hook for mounting and safety cable for stability.

SPECS

Model Number	Input Power	Color Temp	Input Voltage	Lumens	Efficacy	Beam Angle	Temp	CRI	IP
T1-G2RHBLED/U/MW150-40	Multi-watt 80/100/120/150W	40K	120-277W	12080	151	120°	-40°C - +40°C -40°F - +104°F	>70	IP65
				15100					
				18120					
		22650							
T1-G2RHBLED/U/MW150-50		50K		18240	152				
				15200					
	18240								
	Multi-watt 120/150/200/250W	40K	120-277W	22800	151				
T1-G2RHBLED/U/MW250-40				18120					
				22650					
		30200		152					
		37750							
T1-G2RHBLED/U/MW250-50		50K			18240				
	22800								
	30400								
				38000					

WARRANTY: SEVEN YEAR PARTS AND FIVE YEAR LABOR





Model Number	Wattage	Color Temp	Accessories	Controls
T1-G2RHBLED	/U/MW250	-40	-SM	-OS
	250 250W	40 4000K 50 5000K	[Blank] SM Hook/Loop Surface mount bracket RF Reflector	OS On/off PIR High bay motion sensor DL Daylight harvesting sensor MS Bi-level microwave sensor

ORDERING OPTIONS

Orhb G2 UFO High Bay Series

T1-G2RHBLED-MW

DIMENSIONS

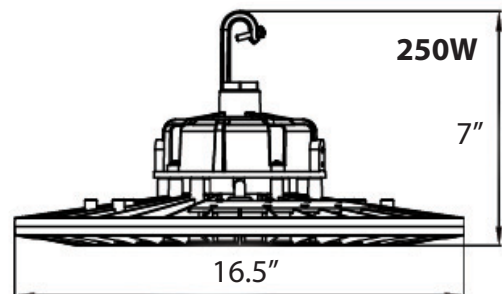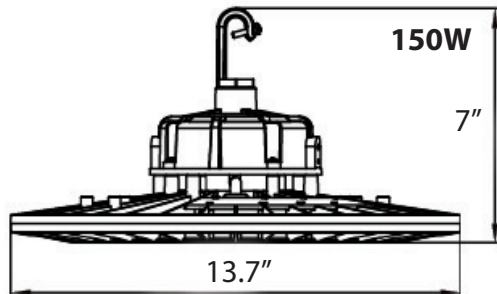

Aluminum
Reflector



PC reflector
with Bottom
Cover



Adaptor
(recommended
for 250W UFO when
connecting a reflector)



Dimmable
Motion Sensor



Built-In
Sensor
Receptacle

ACCESSORIES


Orhb

G2 UFO High Bay Series


T1-G2RHBLED-MW

T1-G2RHBLED/H/MW250-40


ISOFOOTCANDLE DIAGRAM

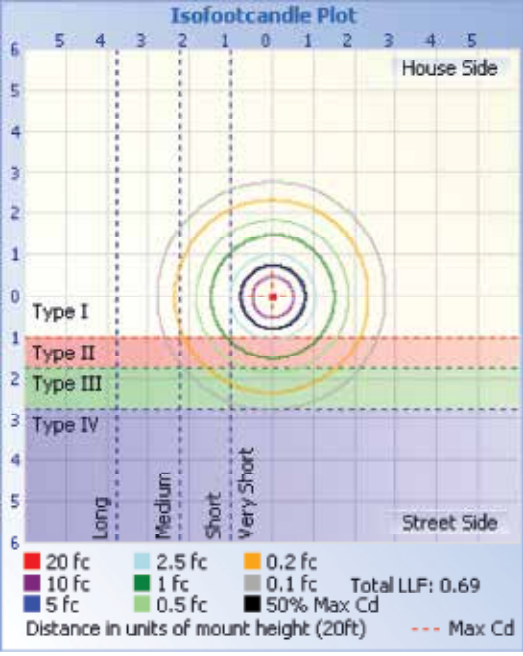

ISOCANDELA DIAGRAM

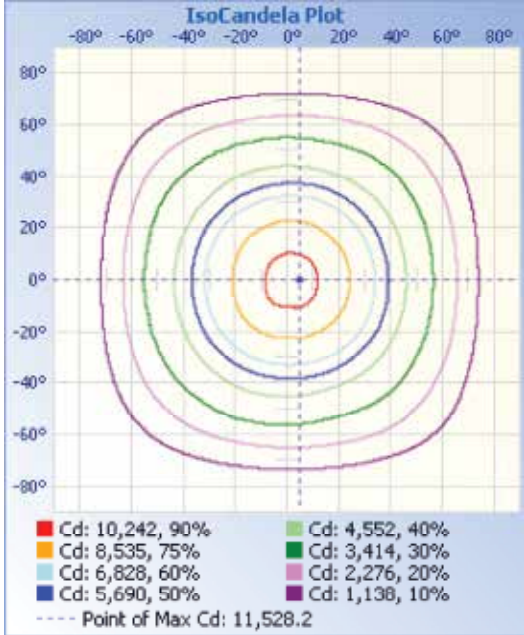

ROADWAY UTILIZATION CURVE

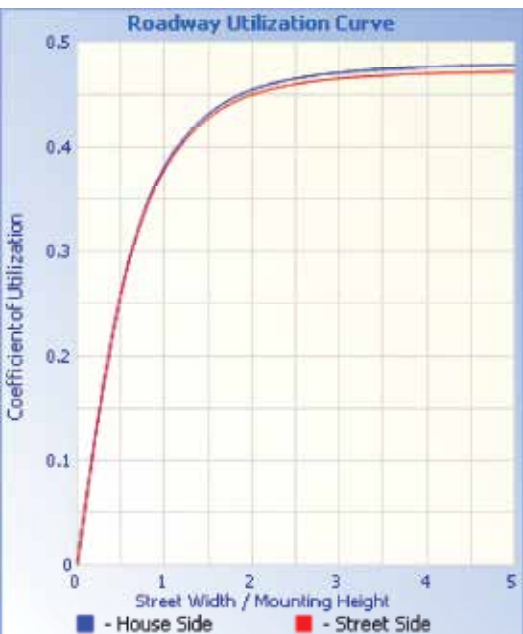

ILLUMINANCE AT A DISTANCE

	Center Beam fc	Beam Width	
17.0ft	39.0 fc	26.2 ft	26.6 ft
34.0ft	9.75 fc	52.3 ft	53.2 ft
51.0ft	4.33 fc	78.5 ft	79.7 ft
68.0ft	2.44 fc	104.6 ft	106.3 ft
85.0ft	1.56 fc	130.8 ft	132.9 ft
102.0ft	1.08 fc	156.9 ft	159.5 ft


Vert. Spread: 75.1°
Horiz. Spread: 76.0°

Orhb G2 UFO High Bay Series


T1-G2RHBLED-MW

T1-G2RHBLED/H/MW250-40


ISOFOOTCANDLE DIAGRAM

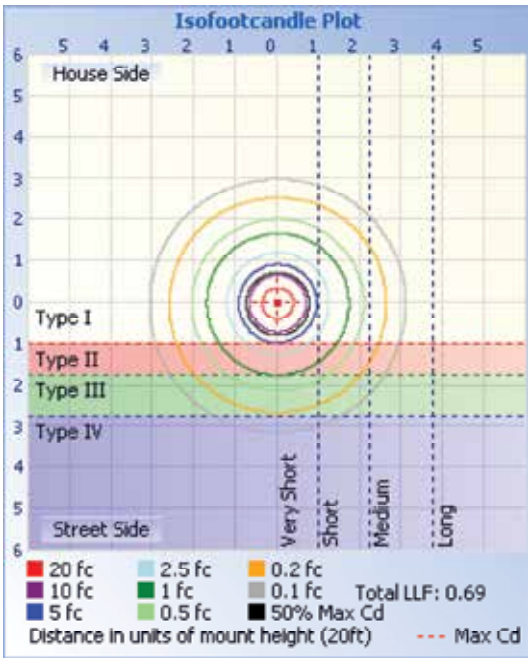

ISOCANDELA DIAGRAM

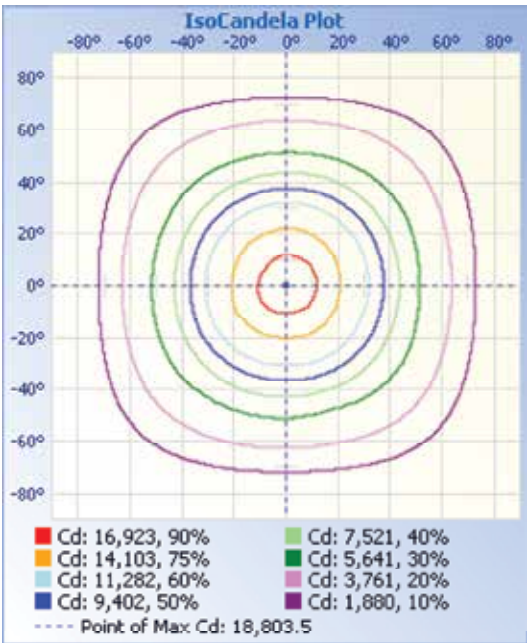

ROADWAY UTILIZATION CURVE

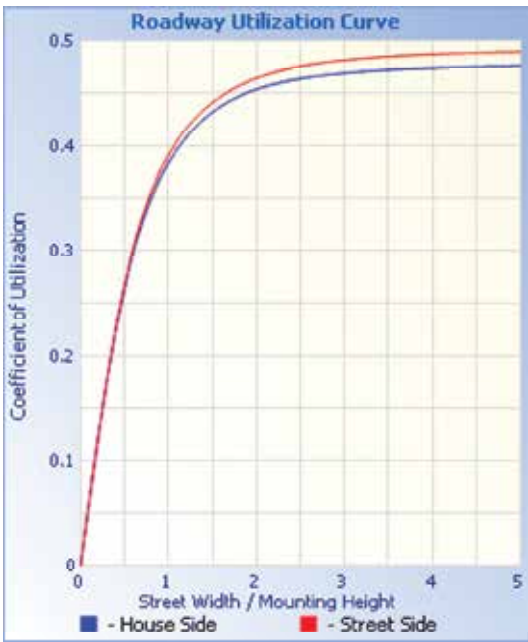

ILLUMINANCE AT A DISTANCE

