


DWRP

Wraparound

FEATURES

- 4 Feet Wide
- 4 Power and 5 CCT field-adjustable
- Sensor solution available
- Artistic curved profile
- UL Listing - Suitable for damp locations
- Long-life, high-efficacy, micro-power LEDs
- Housing and Lens: Steel sheet and Frosted PMMA lens
- Finish is long lasting white with high durability
- Ambient Operating Temperature: -20°C (-4°F) to 50°C (122°F)
- Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V

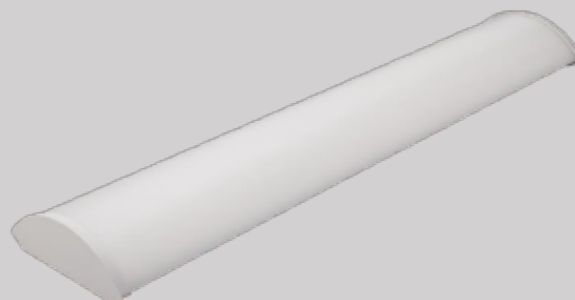

Client:	
Order#:	
Project:	
Type:	

Lifetime: L70 - 100,000 Hours

PERFORMANCE DATA

Model Number	Wattage	Lumens	CCT	Efficacy	Input Voltage
DWRP-GEN2-4MW40	21, 26, 34, 40W (selectable)	3150, 3900, 5100, 6000	30K, 35K, 40K, 50K, 65K (selectable)	>150Lm/W	AC 120-277V AC 120 - 347V 0-10V Dimming



ORDERING INFORMATION

DWRP / **GEN2** / **MW40** / **_____** / **_____**
 SERIES PHASE WATTAGE OPTIONS WARRANTY

FIXTURE SERIES	
DWRP	Deco Wraparound
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW40	21, 26, 34, 40W (selectable)

OPTIONS	
-	None
E	Emergency Function
SE	Sensing Function
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

DIMENSIONS

