

DIGR

RetroFit Center Basket Kit

The DIGR Retrofit Center Basket is a high-performance LED troffer retrofit designed to upgrade existing fluorescent fixtures with improved efficiency and visual comfort. Its center-basket optical design delivers soft, evenly distributed illumination while reducing glare, making it ideal for offices, schools, retail spaces, and other commercial interiors. Built with durable steel housing and a frosted lens for smooth light diffusion, the fixture supports 0–10V dimming, selectable power and CCT options, and long-life LEDs rated for L70 > 100,000 hours for reliable, energy-efficient performance.



FEATURES

- No LGP, Never yellowing.
- High efficacy up to 150lm/w.
- 5 year limited warranty

Lifetime: L70 > 100,000 Hours

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	CRI
DIGR-GEN2-22MW28	2' x 2'	14, 27, 20, 28W (selectable)	2100 - 4200	30K, 35K, 40K, 50K, 65K (selectable)	150	110 °	>80
DIGR-GEN2-24MW34	2' x 4'	17, 20, 28, 34W (selectable)	2550 - 5100				



ORDERING INFORMATION

____ / ____ / ____ / ____ / ____ / ____ / ____
 SERIES PHASE SIZE WATTAGE VOLTAGE OPTIONS WARRANTY

FIXTURE SERIES	
DIGR	Center Basket Retrofit Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
22	2' X 2'
24	2' X 4'
WATTAGE	
MW28	14, 27, 20, 28W (selectable)
MW34	17, 20, 28, 34W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Back Up
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Specifications

UL Listing:

Suitable for damp locations

LEDs:

Long-life, high-efficacy, micro-power LEDs

Lifespan:

Lumen Maintenance, L70 > 100,000 hours

Housing and lens:

Steel sheet, Frosted PMMA lens

Finish:

Long lasting white with high durability

Ambient Operating Temperature:

-20°C (-4°F) to 50°C (122°F)

Driver:

Driver includes dimming control wiring for 0-10V dimming systems. The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V.

Plug & Play Sensor Installation

Integrated audio-jack sensor socket, plug and play.




Patent U-smart sensor installation, quick and easy.




Dimensions

2x4

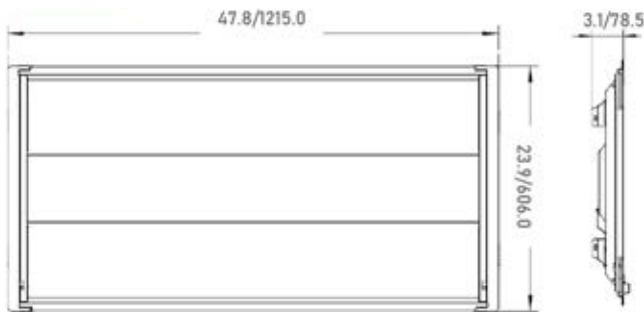

2x2

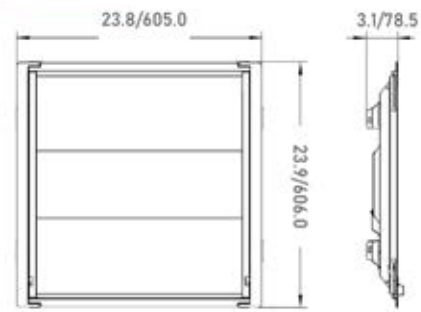

Unit: inch/mm

1x4

