Indoor / Outdoor Lighting



DECO® | LIGHTING

Commercial Product Catalog
2026

SVAL
SIGMA VORTEX Area Light
GEN3

Generation 3 Optic-selectable Fixtures (Page 50)

Quickship

Product Index

Indoor Lighting



10
Vector 2
Linear


12
Vector Pulse
Linear


14
Oris
Donut


16
Ronda
Disk



18
Skyler
3-Plane Center Basket


20
GO
M Shape Center Basket


22
DPIG
Perforated Center Basket


24
DIG
Center Basket


26
DIGR
Retrofit Center Basket


28
BLP
Flat Panel


30
SKYLIT
Flat Panel Kit


32
DWRP
Wraparound


34
DWRPE
Wraparound Narrow


36
DACH
Premium Strip


38
LUCERA
Linear Strip


40
DLH
Full Body High Bay


42
DLHL
Double Body High Bay


44
DLUX
UFO High Bay


46
DT8
A+B Tube


48
DCOMD
Commercial Down light

Outdoor Lighting


50
SIGMA VORTEX
Area Light


54
DAL
Area Light


56
DBKH
Wall Sconces


58
D440/441
Wall Pack


60
DOWP
Wall Pack


62
DSWP
Wall Pack


64
DMWP
Mini Wall Pack


66
DCP
Canopy




68
DVT
Vapor Tight


70
POLES
Square & Round

Residential Lighting


72
SORA
Slim Surface


74
ORRIN
Double Ring Surface


76
MIRA
Disk



DECO® | LIGHTING

DECO Lighting is an American manufacturer focused on delivering reliable, energy-efficient LED lighting solutions for commercial, institutional, and architectural environments. With decades of combined experience in product engineering and lighting technology, DECO has developed a broad portfolio of luminaires designed to support modern standards for performance, sustainability, and visual comfort. The company has produced a range of innovative products over the years and continues to refine its approach as lighting and control technologies evolve.

About Us

Guided by a commitment to quality and long-term value, DECO works closely with designers, contractors, and distributors to provide fixtures that meet the practical and aesthetic needs of today's built environments. The company maintains a consistent focus on efficiency, thoughtful design, and customer-driven improvements, aiming to offer solutions that support both environmental responsibility and dependable performance. This approach allows DECO to adapt its products and processes as project requirements and technologies continue to evolve.

PROVEN EXPERIENCE

Here are just a few of the organizations that have chosen DECO as their lighting partner. DECO Digital LED solutions have been implemented across a wide range of high-profile commercial and architectural projects, supporting environments where performance, consistency, and long-term reliability are essential.

From large-scale developments to refined interior applications, our solutions are trusted by teams seeking efficient, adaptable lighting systems that integrate seamlessly into complex spaces. This breadth of experience reflects our ability to support evolving project requirements while maintaining the quality and reliability expected by leading brands and design professionals.

- 35.8 Billion kWh Saved
- $3.1 Billion Saved
- 200 fortune 500 Companies
- 11,652 Facilities
- 2.45 Billion Sq. ft. Retrofitted

COMMITMENT TO QUALITY



DECO® | LIGHTING

At Deco Lighting we are committed to providing a quality luminaire from top to bottom. Our QC process begins at the component level and is predicated on building a product that will far outlast our warranty. Because of the way we build our fixtures, we enjoy a failure rate of less than one-half percent on all of our LED products, which is why we can afford to provide a 5 year warranty. Deco Lighting is a “Made in the U.S.A.” Company with our corporate offices located in the greater Los Angeles area. We service contracts with military, government and municipal entities in the U.S and around the world.

Nichia LEDs

Deco Lighting is partnered in Nichia, the largest LED manufacturer in the world. Nichia LEDs are considered the best in the world, referred to as the Rolls Royce of LEDs. They have the tightest binning in the industry with a 3-step MacAdam ellipse. We further utilize the Nichia technology by under-driving all the LEDs, thus reducing the heat in the system and extending the life of the LEDs. Our patented Cool Tech, U.S, made boards take the heat off the LEDs twenty percent faster than the competition, and the remaining heat is dissipated evenly across the fixture using our innovative heat transfer plates. In addition, Deco Lighting uses high-performance, on-board optic lenses designed for the super high-power Nichia LEDs that we incorporate into our exterior lighting fixtures. Our custom optics allow for ultimate versatility in the field and include integrated silicone gaskets for ingress protection up to IP67.

Our Casting and Lenses

We only use top quality materials in the manufacture of our castings, including A360 aluminum ingot imported from Australia. Our fixtures contain more metal than the competition, which makes them sturdier and ensures that they operate at a lower temperature than thinner fixtures. This is critical in preventing capacitor failures that occur when internal temperatures reach or exceed 90C.

All of our screws, clips, and fasteners are stainless steel with nickel-plating rather than cadmium plated, making them rust resistant and durable. Our modeled Borosilicate glass lenses are manufactured in Taiwan for superior thermal shock resistance and clarity. We use Lexan 243R or Bayer 2407 for our Polycarbonate lenses, providing the highest UV and temperature ratings available. DuPont powder is used for our powder coat finishes because of its superior UV resistance and durability. Our fixtures have a chromate conversion coating applied prior to the powder coat painting process. This nine-stage process increases the corrosion resistance of the housings, which prolongs the life of the fixture. While it also provides an excellent bonding surface for the paint, it in turn prolongs the life of the finish.




VECTOR 2

Premium Architectural Linear

DECO® | LIGHTING

VECTOR 2

Premium Architectural Linear

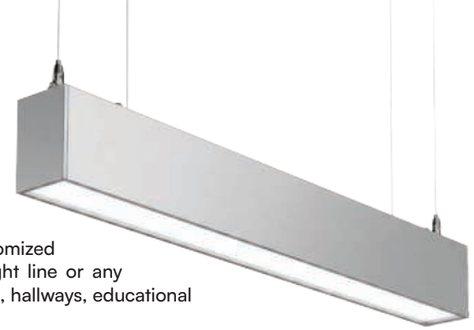

Architectural Linear Strip is professionally and simply designed with slim and clean appearance, which can easily elevate your space by creating your own customized lighting design. ALS series can run seamlessly easily at any length in a straight line or any modeling design by DIY connectors. Ideal for using in offices, conference rooms, hallways, educational facilities and more.

Smart controls

FEATURES

- Easy and quick installation reduces labor cost and optimizes ROI.
- Seamless continuous run up to 600W
- Watt & CCT Selectable
- 4 in 1 installations
- Mobile Commissioning App enables simple, quick installation and programming, all at your fingertips, helping save both time and costs.
- Easily organize groups and zones, set schedules, arrange scenes and customize sensor settings
- The app supports up to 4000 devices per network
- Simple installation and start - up
- Wireless mobile app or wall switch allows simultaneous or independent adjustment of both uplight and down light brightness, as well as CCT
- For larger and more complex network setups, our laptop software facilitates on-site programming via a gateway, ensuring seamless configuration and remote visualization.
- Power Factor: >0.9
- Working Temp.: (-20°C to 45 °C / -4°F to 113 °F)
- Housing Material: Aluminum
- Life Span (L70): 1000,000 hours
- Protection Level: Damp Locations
- Cable: 5 core, 18AWG, 6ft (comes with fixture)

PERFORMANCE DATA

Product ID	Size	Wattage	Lumen Output	CCT	Beam Angle	Efficacy	CRI	Input Voltage
V2-2	2'	10, 15, 20, 25W	1300, 1950, 2600, 3250LM	3000K, 3500K, 4000K, 5000K, 5700K, (Selectable)	105 Degrees	>130LM/W	>80	120-277V
V2-4	4'	35, 40, 45, 50W	4550, 5200, 5850, 6500LM					
V2-6	6'	53, 60, 68, 75W	6890, 7800, 8840, 9750LM					
V2-8	8'	60, 75, 90, 100W	7800, 9750, 11700, 13000LM					

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____ / _____

SERIES SIZE WATTAGE CCT COLOR ACCESSORIES WARRANTY

FIXTURE SERIES	
V2	Vector 2
SIZE	
2'	2 Feet
4'	4 Feet
6'	6 Feet
8'	8 Feet
WATTAGE	
25W	25W/20W/15W/10W
50W	50W/45W/40W/35W
75W	75W/68W/60W/53W
100W	100W/90W/75W/60W

CCT & WATT	
MCCT	5CCT & 4 Wattage - Selectable
COLOR	
W	White
B	Black
ACCESSORIES	
M	Motion Sensor
EM	Emergency Driver
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



VECTOR PULSE


Architectural Linear

DECO® | LIGHTING

VECTOR PULSE

Architectural Linear

The Vector Pulse Series is a highly competitive linear light. The creative quick-link buckle-type clamp allows the installer to make a tool-free contentious run. The unparalleled flexibility enables users to find the right light at different applications.

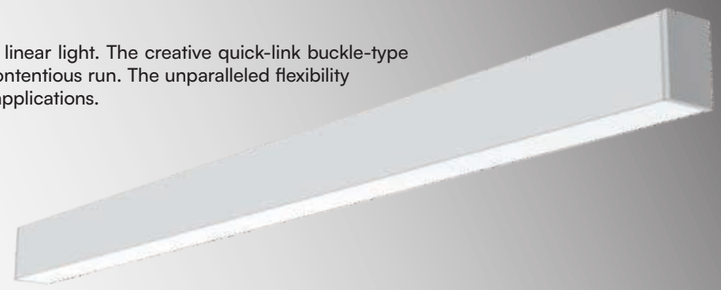

FEATURES

- 115120 lm/W, 1,700lm10,800lm.
- Field adjustable Power and CCT.
- Direct Indirect flux ratio adjustable.
- Fast and seamless connection thanks to patent toolfree press lock design.
- Continuous run available.
- Multiple connection methods.
- Sensor and EM solution ready.

5Yr Warranty (10 optional) · SELECT-A-WATT TECHNOLOGY · 0-10V DIMMABLE · DLC LISTED · UL

UL LISTED DAMP LOCATION · Power Selectable · CCT Selectable 2700K-5000K · 120-277 120-347 VOLT · BATTERY BACKUP AVAILABLE · 20°C to 50°C · WARRANTY 5 YEARS

PERFORMANCE DATA

Model Number	Wattage Indirect	Wattage Direct	CCT	Efficacy	Coating
DVPL-GEN2-2MW20	0%, 30%, 50% of Direct Light	10, 12, 16, 20W (selectable)	2700K, 3000K, 3500K, 4000K, 5000K (selectable)	>140 LM/W	Black
DVPL-GEN2-2MW20-W					White
DVPL-GEN2-4MW40		20, 24, 32, 40W (selectable)			Black
DVPL-GEN2-4MW40-W					White
DVPL-GEN2-8MW80		40, 48, 64, 80W (selectable)			Black
DVPL-GEN2-8MW80-W					White

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES · PHASE · SIZE · WATTAGE · COLOR · WARRANTY

FIXTURE SERIES	
DVPL	Vector Pulse Up/Down Architectural Strip
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
2	2 Feet
4	4 Feet
8	8 Feet
WATTAGE	
MW20	20W - 2 Feet Only
MW40	40W - 4 Feet Only
MW80	80W - 8 feet Only

COLOR	
-	Black (Standard)
W	White Finish
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



ORIS
Donut Light

ORIS
Premium LED Ring Luminaire



FEATURES

- Pendant Mounted
- Single CCT & CCT tunable both available
- Down Lighting Only
- Extruded aluminum with white painting, Other colors optional
- White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel.
- Polycarbonate milky diffuser is snapped into housing
- Surge protector.
- Class II/P driver, 0-10V dimming as standard.
- 50,000+ Hours LED Life Expectancy.
- Power factor: >0.9
- 5 Year Warranty.
- Damp location.
- UL, cUL listed.
- Ambient Temperature:-30 ~ 40 (-22°F to +104°F)

5Yr Warranty (10 optional) | SELECT -A- WATT TECHNOLOGY

PERFORMANCE DATA

Model Number	Diameter	Wattage	Upper Light	CCT	Efficacy	Voltage & Dimming
ORIS-GEN2-2MW60	2 FT	30, 45, 60W (selectable)	10W	3000K, 3500K, 4000K, 5000K (selectable)	120 LM/W	120-277V 277V-480V 0-10 , DALI Dimming
ORIS-GEN2-3MW90	3 FT	45, 70, 90W (selectable)	15W			
ORIS-GEN2-4MW113	4 FT	60, 90, 113W (selectable)	20W			
ORIS-GEN2-5MW135	5 FT	75, 105, 135W (selectable)	25W			
ORIS-GEN2-8MW160	8.3 FT	90, 125, 160W (selectable)	35W			

ORDERING INFORMATION

_____ /_____ / _____ / _____ / _____ /_____/_____/_____

SERIES SIZE WATTAGE DIAMETER MOUNT CCT ACCESSORIES WARRANTY

FIXTURE SERIES	
Oris	Oris LED Round Light
PHASE	
GEN2	Generation II, Multi Watts, Multi CCT
LENS	
LX	No Lens
LM	Milky Lens / Perforation Cover
LD	Clear Lens
LL	Louver
WATTS	
40	40W
80	80W
100	100W
120	120W
DIAMETER	
2	24"
3	36"
4	48"
4.9	59"

MOUNT	
B	Surface/Suspended
CCT	
30	3000K
35	3500K
40	4000K
45	4500K
50	5000K
VK	CCT Tunable
ACCESSORIES	
S	Motion Sensor
EM	Emergency
WARRANTY	
5	5 Year Warranty (Standard)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



RONDA

Round Plane Luminaires

Ronda

LED Round Light

Round frame adopt extrusion aluminum. Better for heat dissipation,higher hardness, strong structure. White painted parts are treated with a five-stage phosphate bonding process and finished with high reflectance baked enamel. Performance engineered optical lens assembly delivers unique beam angles and reduces glare.



FEATURES

- Class II/P driver, standard with 0-10V, Triac dimming is optional.
- 50,000+ Hours LED Life Expectancy.
- Power factor: >0.98.
- Down 100% lighting.
- Driver disconnect provided where required to comply.
- 5 Year Warranty.
- Damp location.
- UL/cUL us listed.
- Ambient Temperature:-20 ~ 45 (-46°F to +104°F)

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL

PERFORMANCE DATA

Product ID	Diameter	Wattage	Efficacy	Dimming	CCT
RONDA-GEN2-1MW30	400mm (1.3 Feet)	20, 30W (Selectable)	120 LM/W	0-10V Dimming	2700K, 3000K, 3500K, 4000K, 5000K (selectable)
RONDA-GEN2-2MW45	600mm (2 Feet)	25, 35, 45W (Selectable)			
RONDA-GEN2-3MW80	1000mm (3.3 Feet)	60, 70, 80W (Selectable)			

ORDERING INFORMATION

_____ /_____ / _____ / _____ / _____ /_____/_____/_____ / _____ / _____ /_____/_____

SERIES PHASE LENS WATTS DIAMETER UPLIGHT COLOR MOUNT CCT OPTIONS ACCESSORIES WARRANTY

FIXTURE SERIES	
Ronda	Ronda LED Round Light
PHASE	
GEN2	Generation II, Multi Watts, Multi CCT
LENS	
LM	Milky Lens / Perforation Cover
LD	Clear Lens
LL	Louver
WATTS	
MW30	20, 30W (selectable)
MM45	25, 35, 45W (selectable)
MW80	60, 70, 80W (selectable)
DIAMETER	
1.3	1.3 Feet / 400mm
2	2 Feet / 600mm
3.3	3.3 Feet / 1000mm
OPTIONAL UP LIGHT	
UP24	Up Light 2 Feet 3 Watts
UP39	Up Light 3 Feet 5 Watts
COLOR	
BK	Black
WH	White

MOUNT	
B	Surface/Suspended
CCT	
MCCT	27K,30K, 35K, 40K, 50K (selectable)
OPTIONS	
	None
RMK1.3	Recessed Mount Kit 1.3 FT
RMK2	Recessed Mount Kit 2 FT
RMK3.3	Recessed Mount Kit 3.3 FT
ACCESSORIES	
S	Motion Sensor
EM	Emergency
WARRANTY	
5	5 Year Warranty (Standard)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

SKYLER

Volumetric Butterfly Center Basket

DECO® | LIGHTING

SKYLER™ 2.0

Volumetric Butterfly Center Basket



The Skyler 2.0 recessed volumetric back lit panel luminaire is an innovative LED fixture designed to deliver a modern aesthetic and complement today's interior spaces. Featuring a low-profile form factor, the Skyler 2.0 is ideal for buildings with a low plenum space and is suitable for all standard 1x4, 2x2 or 2x4 grid ceilings. Incorporating back-lit LED technology and micro-prismatic conical structures in the diffuser lens, the Skyler features a Unified Glare Rating (UGR) of less than 19, delivering light where it is needed and reducing direct glare to inhabitants. This creates a soft and comfortable lighting experience for commercial and institutional spaces including open offices, classrooms, retail and healthcare facilities.

FEATURES

- Extruded aluminum frame powder coated white
- Light emitting surfaces are back-lit acrylic for uniform illumination
- Micro-prismatic lens delivers a Unified Glare Rating (UGR) of less than 19
- FCC Compliant
- Die formed CRS housing, powder coated white
- Meets CCEA Chicago Plenum Compliant
- Temper switch allows users to select between 5000K, 4000K, and 3500K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.
- Wattages are selectable:
  1x4 and 2x2 (25W,30W,40W),
  2x4 (30W,40W,50W).
  The fixture is set at 50W.

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | 0-10V DIMMABLE | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Model Number	Wattage	CCT	Efficacy	Lumens	CRI	Projected Lifetime
DSCB-GEN2-14MW40	25, 30, 40W (Selectable)	3500K, 4000K, 5000K (Selectable)	110 LM/W	2750 - 4400LM	90+	>173,000 Hours (L70); >50,000 Hours (L90)
DSCB-GEN2-22MW40	15, 18, 25, 30W (Selectable)	2700K, 3000K, 3500K, 4000K, 5000K (Selectable)	150 LM/W	2250 - 4500LM		
DSCB-GEN2-24MW40	20, 28, 34, 41W (Selectable)			3000 - 6150LM		

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DSCB	Skyler 2.0 Volumetric Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
14	1 X 4
22	2 X 2
24	2 X 4
WATTAGE (SIZE 14)	
MW40	25, 36, 40W (selectable)
WATTAGE (SIZE 22)	
MW40	20, 25, 30, 35, 40W (selectable)

WATTAGE (SIZE 24)	
MW41	20, 28, 34, 41W (selectable)
OPTIONS	
-	None
MS	Motion Sensor
E	Emergency
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



GO

M-Shape Center Basket

DECO® | LIGHTING

GO

M-Profile Center Basket Luminaire

With special M shape lens, the Troffer Series is a new generation of center baskets with revolutionary multi-watt and multi-CCT technology. The field adjustable multi-watt, multi-color dip switch on the driver allows you to change the wattage and color temperature according to your project's needs. This series comes in 2' x 2: and 2' x 4' packages. With a slimmer construction, the entire fixture functions as a heat sink to keep the LED chips cooler, thus prolonging the life of the The Troffer Series. The fixture has a lifespan of 100,000 hours and is suitable for damp locations.



FEATURES

- No LGP, Never yellowing.
- High efficacy up to 125lm/w,
- 5 year limited warranty.
- No LGP, Never yellowing.

Lifetime: 100,000 Hours

5Yr Warranty (10 optional) · 0-10V DIMMABLE · SELECT-A-WATT TECHNOLOGY · UL · DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	CRI
GO-GEN2-22MW40	2' x 2'	20, 25. 30, 35, 40W (Selectable)	3000, 3750, 4500, 5250 , 6000LM	3000K, 3500K, 4000K, 5000K, 6500K (Selectable)	150 LM/W	110°	>80
GO-GEN2-24MW60	2' x 4'	20, 30, 40, 50, 60W (Selectable)	3000, 4500. 6000, 7500, 9000LM				

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____ / _____

SERIES · PHASE · SIZE · WATTAGE · VOLTAGE · OPTIONS · WARRANTY

FIXTURE SERIES	
GO	Game Over Architectural LED Fixture
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
22	2" X 2"
24	2" X 4"
WATTAGE	
MW40	40, 35, 30, 25, 20W (selectable)
MW60	60, 50, 40, 30, 20W (selectable)

VOLTAGE	
UNV	120-277V
OPTIONS	
-	None
EM	Emergency Back Up
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DPIG

Perforated Center Basket

DECO® | LIGHTING

DPIG

Perforated Center Basket Luminaire



The Troffer Series is a new generation of center baskets with revolutionary multi-watt and multi-CCT technology. The field adjustable multi-watt, multi-color dip switch on the driver allows you to change the wattage and color temperature according to your project's needs. This series comes in 2' x 2: and 2' x 4' packages. With a slimmer construction, the entire fixture functions as a heat sink to keep the LED chips cooler, thus prolonging the life of the The Troffer Series. The fixture has a lifespan of 100,000 hours and is suitable for damp locations. It includes a metal perforated basket.

FEATURES

- No LGP, Never yellowing.
- High efficacy up to 125lm/w,
- 5 year limited warranty.

Lifetime: 100,000 Hours

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	CRI
DPIG-GEN2-22MW40	2' x 2'	20, 25, 30, 35, 40W (Selectable)	3000, 3750, 4500, 5250, 6000LM	3000K, 3500K, 4000K, 5000K, 6500K (Selectable)	150 LM/W	110°	>80
DPIG-GEN2-24MW60	2' x 4'	20, 30, 40, 50, 60W (Selectable)	3000, 4500, 6000, 7500, 9000LM				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ / _____

SERIES PHASE SIZE WATTAGE OPTIONS WARRANTY

FIXTURE SERIES	
DPIG	Center Basket Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
22	2' X 2'
24	2' X 4'
WATTAGE	
MW38	18, 28, 38W (selectable)
MW48	28, 38, 48W (selectable)

OPTIONS	
-	None
EM	Emergency Back Up
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DIG

Center Basket

DECO® | LIGHTING

DIG

Center Basket Luminaire

The Troffer Series is a new generation of center baskets with revolutionary multi-watt and multi-CCT technology. The field adjustable multi-watt, multi-color dip switch on the driver allows you to change the wattage and color temperature according to your project's needs. This series comes in 2' x 2: and 2' x 4' packages. With a slimmer construction, the entire fixture functions as a heat sink to keep the LED chips cooler, thus prolonging the life of the The Troffer Series. The fixture has a lifespan of 100,000 hours and is suitable for damp locations.



FEATURES

- No LGP, Never yellowing.
- High efficacy up to 125lm/w,
- 5 year limited warranty.

Lifetime: 100,000 Hours

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	CRI
DIG-GEN2-14MW30	1' x 4'	15, 18, 25, 30W (Selectable)	2250 - 4500LM	3000K, 3500K, 4000K, 5000K, 6500K (selectable)	150 LM/W	110°	>80
DIG-GEN2-22MW40	2' x 2'	20, 25, 30, 35, 40W (Selectable)	3000 - 6000LM				
DIG-GEN2-24MW60	2' x 4'	20, 30, 40, 50, 60W (Selectable)	3000 - 9000LM				
DIG-GEN2-22MW38	2' x 2'	18, 28, 38W (Selectable)	2250 - 4750LM	3500K, 4000K, 5000K (selectable)	125 LM/W		
DIG-GEN2-24MW48	2' x 4'	28, 38, 48W (Selectable)	3500 - 6000LM				

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / SIZE / WATTAGE / VOLTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DIG	Center Basket Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
14	1' x 4'
22	2' X 2'
24	2' X 4'
WATTAGE	
MW38	38, 28, 18W (selectable)
MW38	38, 28, 18W (selectable)
MW40	40, 35, 30, 25, 20W (selectable)
MW48	48, 38, 38W (selectable)
MW60	60, 50, 40, 30, 20W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Back Up
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DIGR

Retrofit Center Basket

DECO® | LIGHTING

DIGR

RetroFit Center Basket Kit



The DIGR Retrofit Center Basket is a high-performance LED troffer retrofit designed to upgrade existing fluorescent fixtures with improved efficiency and visual comfort. Its center-basket optical design delivers soft, evenly distributed illumination while reducing glare, making it ideal for offices, schools, retail spaces, and other commercial interiors. Built with durable steel housing and a frosted lens for smooth light diffusion, the fixture supports 0—10V dimming, selectable power and CCT options, and long-life LEDs rated for L70 > 100,000 hours for reliable, energy-efficient performance.

FEATURES

- No LGP, Never yellowing.
- High efficacy up to 150lm/w,
- 5 year limited warranty

Lifetime: > 100,000 Hours



PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	CRI
DIGR-GEN2-22MW28	2' x 2'	14, 27, 20, 28W (selectable)	2100 - 4200LM	3000K, 3500K, 4000K, 5000K, 6500K (selectable)	150 LM/W	110 °	>80
DIGR-GEN2-24MW34	2' x 4'	17, 20, 28, 34W (selectable)	2550 - 5100LM				

ORDERING INFORMATION


_____ / _____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / SIZE / WATTAGE / VOLTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DIGR	Center Basket Retrofit Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
22	2' X 2'
24	2' X 4'
WATTAGE	
MW28	14, 27, 20, 28W (selectable)
MW34	17, 20 , 28, 34W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Back Up
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

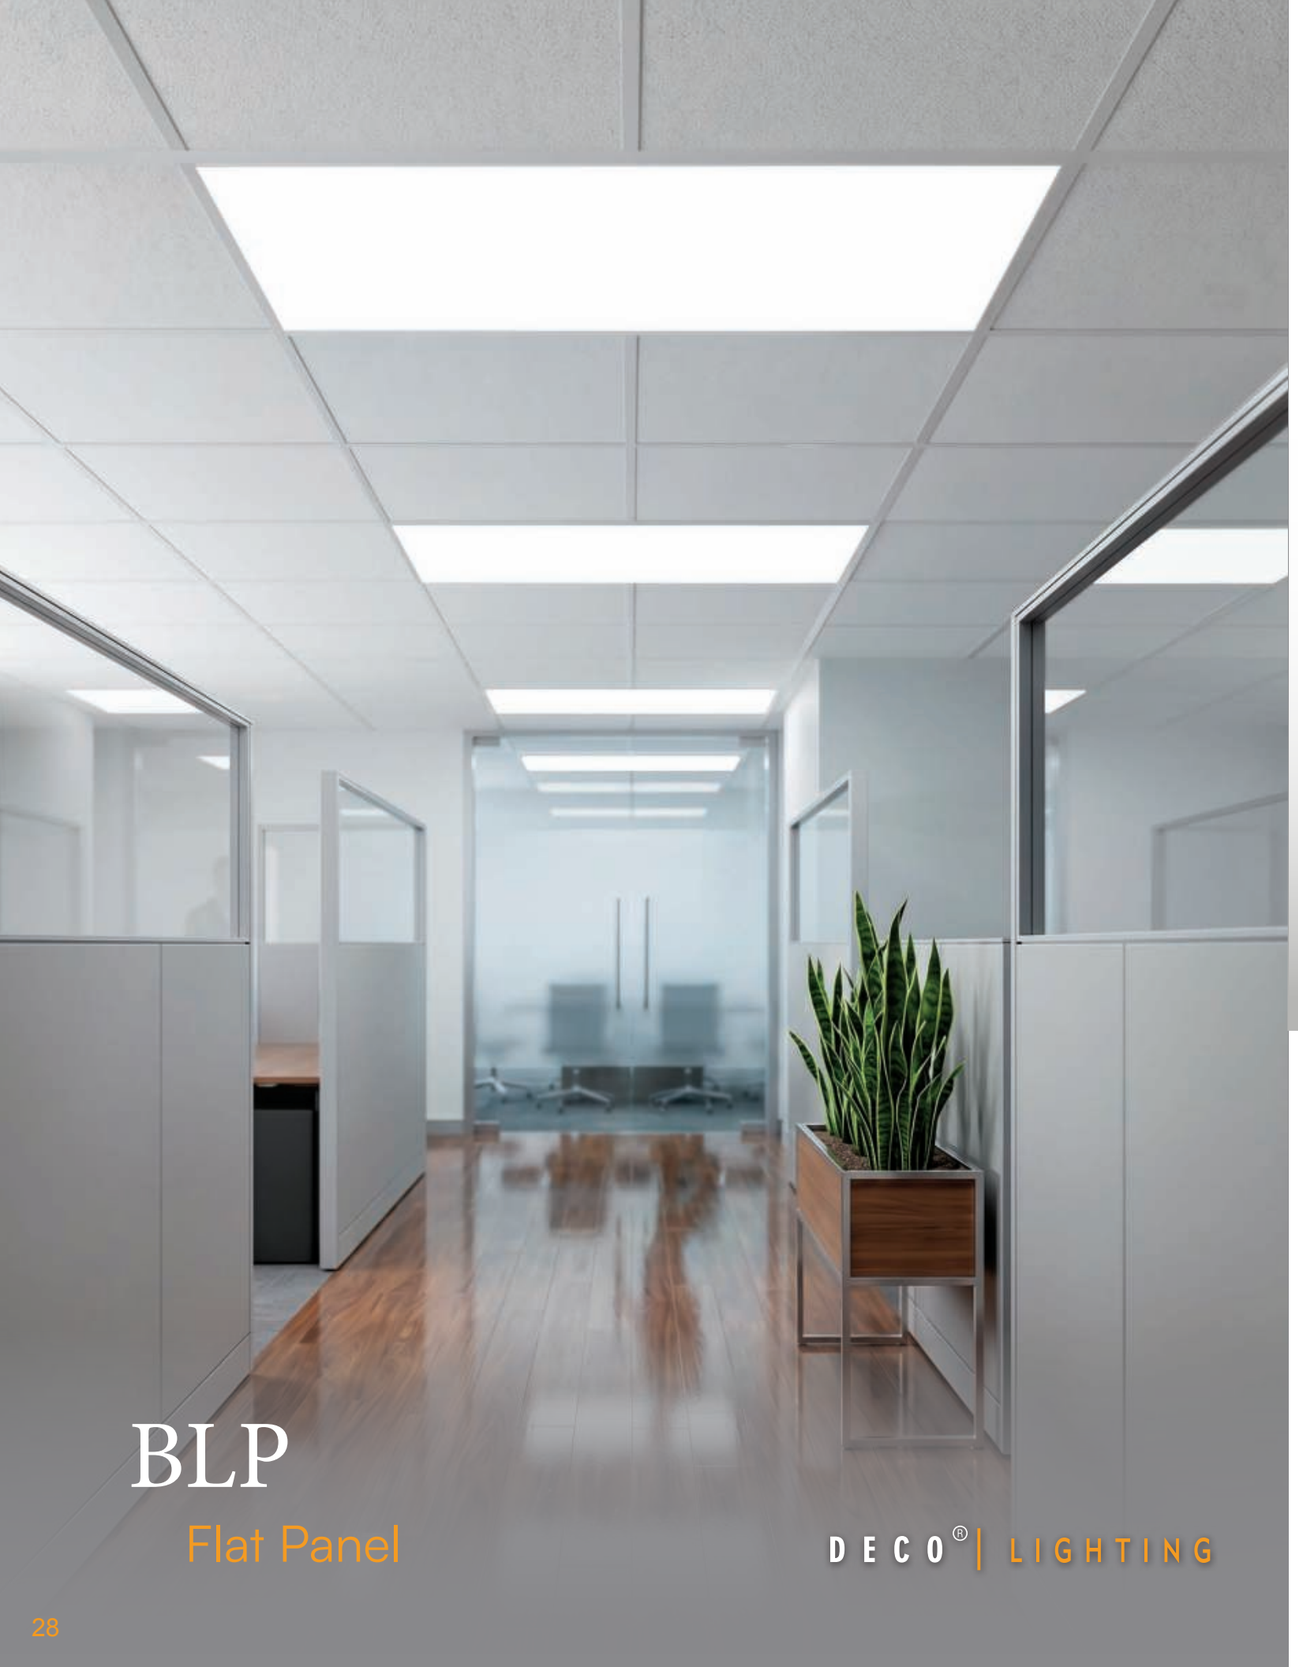

BLP

Flat Panel

DECO® | LIGHTING

BLP

Back-lit Flat Panel Luminaire



The revolutionary flat panel series boasts of its cutting-edge multi-watt and multi-eel features. With the field adjustable multi-watt and multi-color dip switch on the driver, you can customize the wattage and color temperature to meet your project's specific requirements. This ultra-thin fixture comes with a backlit frame that enhances aesthetics and provides even light distribution. You can choose from 1 x 4, 2 x 2, and 2 x 4 sizes to suit your needs.

FEATURES

- No LGP, Never yellowing.
- High efficacy up to 125lm/w.
- 5 year limited warranty.

Lifetime: 100,000 Hours

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle	Voltage/ Dim
BLP-GEN2-14MW40	1' x 4'	20, 25, 30, 35, 40W (selectable)	2500 - 5000LM	3000K, 3500K, 4000K, 5000K, 6500K (selectable)	125 LM/W	100°	120 - 277V 0-10V
BLP-GEN2-22MW40	2' x 2'	20, 25, 30, 35, 40W (selectable)	2500 - 5000LM				
BLP-GEN2-24MW72	2' x 4'	18, 30, 40, 50, 72W (selectable)	2250 - 9000LM				
BLP-GEN2-24MW45		18, 26, 33, 39, 45W (selectable)	2600 - 6300LM		140 LM/W		

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES | PHASE | SIZE | WATTAGE | OPTIONS | WARRANTY

FIXTURE SERIES	
BLP	Back-Lit Flat Panel Luminaire
PHASE	
GEN2	Generation II: Multi-Watt & Multi CCT
SIZE	
14	1' x 4'
22	2' x 2'
24	2' x 4'
WATTAGE	
14MW40	20, 25, 30, 35, 40W (selectable)
22MW40	20, 25, 30, 40W (selectable)
MW72	18, 30, 40, 50, 72W (selectable)
MW45	18, 26, 33, 39, 45W (selectable)

OPTIONS	
-	None
EM	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.


SKYLIT

Architectural Back Lit Panel

DECO® | LIGHTING

SKYLIT™

Flat Panel with Bezel Frame Kit

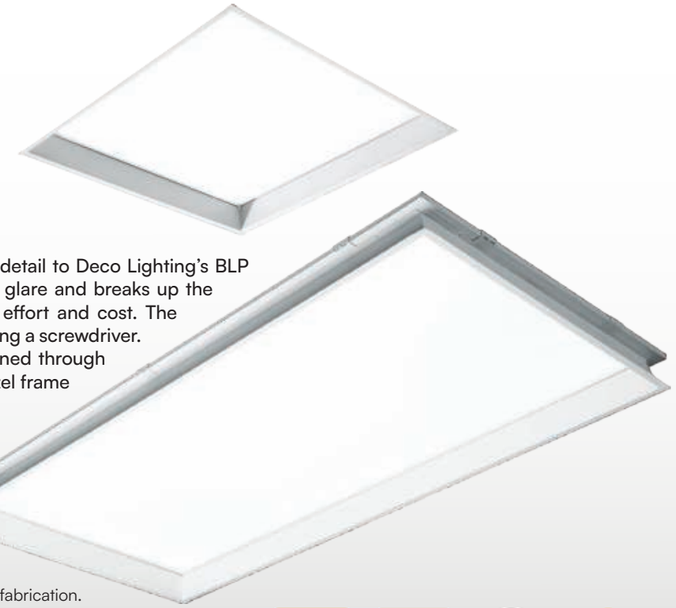

The Skylight is a bezel frame that provides a 1.75” regress detail to Deco Lighting’s BLP Luminaire, creating a pleasant skylight effect that reduces glare and breaks up the visual monotony of a Suspended T Bar Ceiling with little effort and cost. The frame is shipped unassembled, and is quickly assembled using a screwdriver. An integrated screw channel allows for screws to be fastened through the t bar for seismic conditions. A mud in version of the bezel frame allows a seamless, professional look in drywall ceilings.

FEATURES

- Frame: Powder coated aluminum extrusion, post painted after fabrication.
- Corner Brackets: Powder coated rolled steel.

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Type	Type
SKY-T-14	T-Bar Kit	T- Bar Kit
SKY-T-22		
SKY-T-24	Mud-In Kit	Mid-In Bezel Kit

ORDERING INFORMATION


_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
SKY	SKYLITI Luminaire
TYPE	
T	T Bar Kit
M	Mud-In Bezel Kit
SIZE	
14	1’ x 4’
22	2’ x 2’
24	2’ x 4’

FINISH	
W	None
C	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

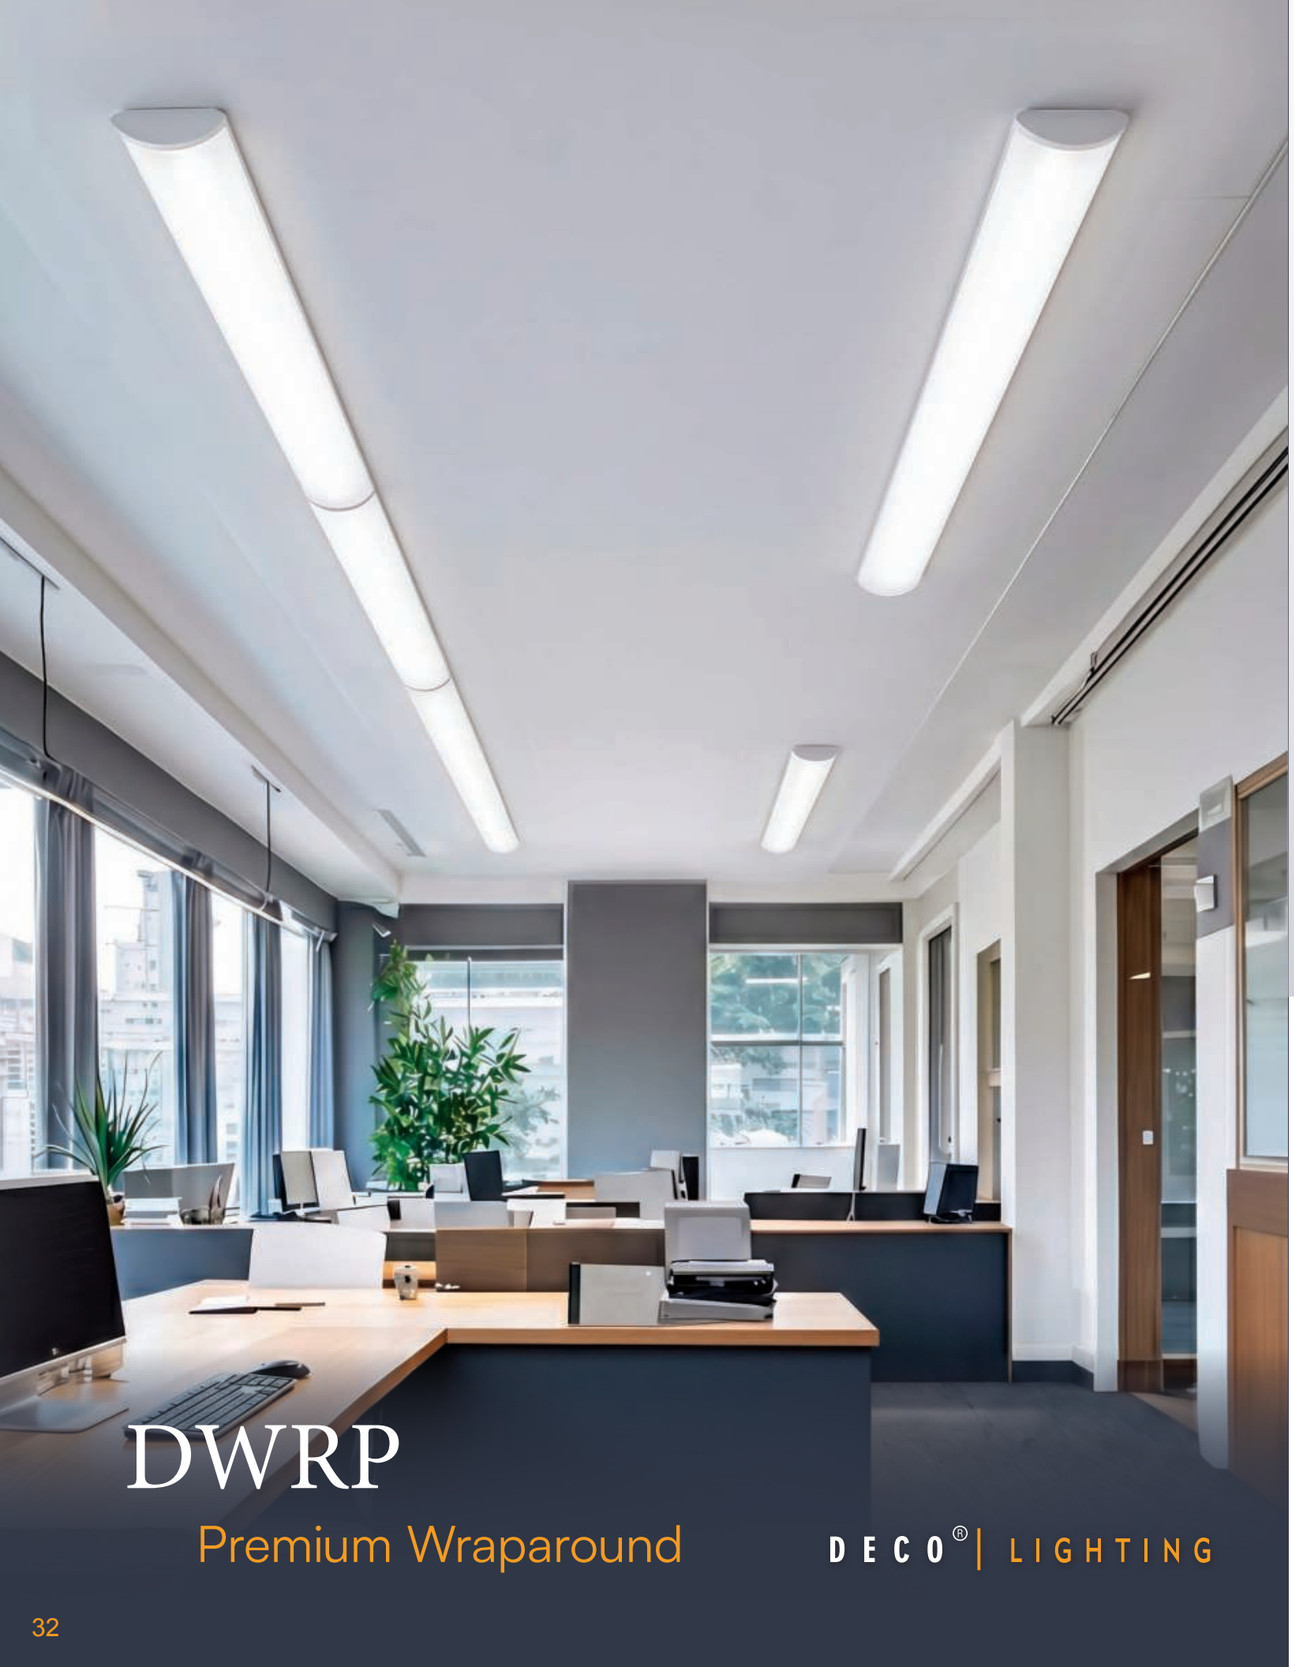

DWRP

Premium Wraparound

DECO® | LIGHTING

DWRP

Premium Wraparound

The versatile LED wraparound fixtures are a high-quality solution for general purpose lighting in surface mount applications. This fixtures are designed to replace traditional 2-lamp and 4-lamp fluorescent wraps and offer all the great benefits of LED to outfit your educational spaces, offices, storage rooms, hallways or closets.



FEATURES

- 4 Feet Wide
- 4 Power and 5 CCT field-adjustable
- Sensor solution available
- Artistic curved profile
- UL Listing - Suitable for damp locations
- Long-life, high-efficacy, micro-power LEDs
- Housing and Lens: Steel sheet and Frosted PMMA lens
- Finish is long lasting white with high durability
- Ambient Operating Temperature: -20°C (-4°F) to 50°C (122°F)
- Driver includes dimming control wiring for 0-10V dimming systems
- The dim-to-off voltage threshold of optional 12V AUX integrated driver ranges from 0.1V to 0.5V

Lifetime: L70 - 100,000 Hours

5Yr Warranty (10 optional) | SELECT - A - WATT TECHNOLOGY | 0-10V DIMMABLE | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Model Number	Wattage	Lumens	CCT	Efficacy	Input Voltage
DWRP-GEN2-MW40	21, 26, 34, 40W (selectable)	3150, 3900, 5100, 6000LM (selectable)	3000K, 3500K, 4000K, 5000K, 6500K (selectable)	>150LM/W	AC 120-277V AC 120 - 347V 0-10V Dimming

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____

SERIES / PHASE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DWRP	Deco Wraparound
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW40	21, 26, 34, 40W (selectable)

OPTIONS	
-	None
E	Emergency Function
SE	Sensing Function
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DWRPE

Wraparound Narrow

DECO® | LIGHTING

DWRPE

Wraparound Narrow

The DWRPE is a low-profile LED wraparound fixture designed for general ambient lighting in commercial and institutional environments such as corridors, stairwells, utility spaces, and offices. Featuring a clean, minimalist housing with tool-free lens removal, the fixture offers field-selectable wattage and CCT to support flexible installation, energy efficiency, and code-compliant upgrades in both new construction and retrofit applications.



FEATURES

- Field-selectable wattage and CCT (3000K / 3500K / 4000K / 5000K, 6500K optional)
- High efficacy up to 120 lm/W
- Low-profile wraparound design with tool-free lens removal
- 120—277V input voltage
- UL Listed, DLC Listed, damp location rated

5Yr Warranty (10 optional) | SELECT -A- WATT TECHNOLOGY | UL®

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens Rated	Efficacy	CCT
DWRPE-GEN2-MW46	4FT	24, 31, 38, 46W	3,000 - 5,500LM	120 LM/W	3000K, 3500K, 4000K, 5000K, 6500K (selectable)

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES / PHASE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DWRPE	Wrapearound E Luminaire
PHASE	
GEN2	Generation II: Multi-Watt & Multi CCT
WATTAGE	
MW46	Multi-Watt 46

OPTIONS	
-	None
EM	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DACH

Mushroom Linear Strip



The DACH-LED round series is a functional and multi-purpose channel family that incorporates premium performance and construction durability. The performance and application versatility makes this fixture usable in every application. This fixture can be installed using various mounting methods and numerous options and accessories are available (see Page 3). The DACH-LED round series can be the illumination solution in commercial, industrial, institutional and retail applications. An excellent choice for storage/utility areas, coves, display cases, shops, task and general area lighting.

FEATURES

- Die formed channel.
- Powder coated white enamel finish after fabrication.
- Easy wireway access/wireway cover removed without tools.
- Numerous KOs for easy installation.
- Also available in tandem 8' lengths, & tandem wired 16' lengths.
- UL listed for damp location
- Operating Temperature: -20°C to +50°C Ambient
- OPTICS: Architectural frosted diffuse lens eliminates pixelation, improves uniformity and minimizes glare.
- DLC Premium Listed for utility rebates (see DLC matrix below for more information)
- Performs at up to 130 lumens per watt; CRI: 80+
- Lifetime Ratings - L90: 112,000 hours; L80: 224,000 hours
- E-Emergency to provide 16W (2000 Lumens) MAX load for 90 min.
- Temper switch allows users to select between 3500K, 4000K, and 5000K in the field by simply switching an easily accessible three position switch. Fixture comes set/standard at 40K.

5Yr Warranty (10 optional) · SELECT-A-WATT TECHNOLOGY · 0-10V DIMMABLE · UL · DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Wattage	Lumens	CCT	Voltage	CRI	Op. Temp
DACH-GEN2-4MW34	17, 21, 26, 34W (Selectable)	2700, 3500, 4100, 5200LM	3000K, 3500K, 4000K, 5000K, 6500K (selectable)	120-277V	80+	-20°C to 40°C
DACH-GEN2-8MW68	34. 42, 52, 68W (Selectable)	5400, 7000, 8200, 10500LM				

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DACH	Deco Mini Wallpack Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
4	4 Feet
8	8 Feet
WATTAGE	
MW34	17, 21, 26, 34W (selectable) - 4 Feet Only
MW68	34, 42, 52, 68W (selectable) - 8 Feet Only

OPTIONS	
-	None
E	Emergency
MS	Motion Sensor
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DACH

Mushroom Linear Strip

DECO® | LIGHTING



LUCERA

LED Linear Strip Luminaire

The Strip Light Series is a versatile fixture with an adjustable dip switch on the driver, letting you easily change wattage and color temperature for different project needs. Available in 4-foot and 8-foot sizes, it has a sleek architectural finish suited for modern spaces. The fixture includes secure lens-holding cables for safe installation and cleaning, and it can be customized with motion sensors or emergency battery backups. Built from powder-coated steel stamping, polycarbonate end cups, and high-transparency diffusers, it delivers both durability and refined style.

M Shape



W Shape



FEATURES

- Luminous part is integrated and fasttened to fixture by snap locks.
- Changeable lighting module {R, M type for option).
- Tool-less accessed and easy to install.
- Field adjustable light output and CCT selectable.
- Bi-level motion sensor or battery backup are available

5Yr Warranty (10 optional) | SELECT - A - WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Efficacy	Angle
DLSL-GEN2-W2MW30	2 FT	10, 15, 20, 25, 30W (Selectable)	1400 - 4200LM	3000K, 3500K, 4000K, 5000K, 6500K (Selectable)	140 LM/W	110°
DLSL-GEN2-W4MW45	4 FT	5, 10 , 15, 30, 45W (Selectable)	700 - 6300LM			
DLSL-GEN2-W8MW90	8 FT	10, 20, 30, 60, 90W (Selectable)	1400 - 12600LM			
DLSL-GEN2-M2MW30	2 FT	10, 15, 20, 25, 30W (Selectable)	1400 - 4200LM			
DLSL-GEN2-M4MW45	4 FT	5, 10 , 15, 30, 45W (Selectable)	700 - 6300LM			
DLSL-GEN2-M8MW90	8 FT	10, 20, 30, 60 90W (Selectable)	1400 - 12600LM			

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / PROFILE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DLSL	Deco Linear Strip Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SHAPE	
W	Flat Head
M	Mushroom Head
SIZE	
2	2 FT
4	4 FT
8	8 FT

WATTAGE	
MW30	10, 15, 20, 25, 30W (selectable)
MW45	5, 10, 15, 30, 45W (selectable)
MW90	10, 20, 30, 60, 90W (selectable)
OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Backup
MS-E	Motion Sensor and Emergency Driver
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DLH

Linear Highbay

DECO® | LIGHTING

DLH

Linear Highbay Luminaire



The Linear High Bay Series consists of high-wattage LED high bay fixtures that come with upgraded LED chips and a slimmer construction. This series is available in 165W and 320W packages. The Alpha Series is the perfect solution for industrial, commercial, and other high bay applications due to its precision-designed optics, multiple distributions, and a choice of lumen outputs and color temperatures. These energy-efficient fixtures are suitable for use in damp locations and have a lifespan of 50,000 hours

FEATURES

- 0-10V Dimming
- Toggle switch control CCTs/Watts
- High Reliability, Driver & LED board over temperature automatic derating
- Flicker Free
- EM optional



Projected Lifetime:
50,000 Hours

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Voltage	Efficacy	Angle	CRI
DLH-GEN2-2MW165	2 FT	105, 135, 165W (Selectable)	15750, 20250, 24750LM	4000K, 5000K, 6500K (Selectable)	120-277V 347-480V	150LM/W (5K) 140LM/W (4K & 65K)	90°	>80
DLH-GEN2-4MW320	4 FT	165, 220, 320W (Selectable)	24750, 33000, 48000lLM					

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES | PHASE | SIZE | WATTAGE | OPTIONS | WARRANTY

FIXTURE SERIES	
DLH	Deco Linear Highbay Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
2	2 FT
4	4 FT
WATTAGE	
MW165	105, 135, 165W (selectable) - 2FT only
MW320	180, 220, 320W (selectable) - 4FT only

OPTIONS	
-	None
MS	Motion Sensor
E	Emergency
MS-E	Motion Sensor and Emergency Driver
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DLHL

Linear Highbay - Double Body

DECO® | LIGHTING

DLHL

Double Body Linear High Bay

The DLHL Double Body Linear High Bay is a high-efficacy LED fixture designed for high-ceiling commercial and industrial environments such as warehouses, distribution centers, and manufacturing facilities. Its die-cast aluminum housing with a UV-stabilized polycarbonate lens delivers uniform, high-output illumination, while selectable wattage and CCT provide on-site flexibility and support sensor integration and code-compliant installations.



FEATURES

- 3 wattage and 3 CCT selectable (3500K / 4000K / 5000K)
- High efficacy up to 150 lm/W
- Die-cast aluminum housing with polycarbonate lens
- Integrated plug-and-play sensor port
- UL Listed, DLC Premium, FCC, RoHS compliant

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	CCT	Watts	Efficacy	Input Voltage
DLHL-GEN2-1MW165	1.2 FT	3500K 4000K 5000K (Selectable)	90, 125, 165W	150LM/W	120 - 277V
DLHL-GEN2-2MW330	2.4 FT		180, 250, 330W		
DLHL-GEN2-3MW495	3.6 FT		270, 375, 495W		

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DLHL	Deco Double Body Linear Highbay Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
1	1.2 FT
2	2.4 FT
3	3.6 FT
WATTAGE	
MW16	90. 125, 165W (selectable)
MW33	180, 250, 330W (selectable)
MW50	270, 375, 495W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
E	Emergency
HV	High Voltage
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DLUX

UFO Highbay

DECO® | LIGHTING

DLUX

UFO Highbay Luminaire

The latest generation of LED high bay lights feature a futuristic design and offers numerous benefits, including longer lifespan, lower maintenance, and higher efficiency. This fixture is slim and lightweight, with no bulky heat sink, making it a perfect replacement for less-efficient traditional metal halide bulbs. Additionally, the LED high bay light can be used with a 0-10V dimmer, allowing you to adjust the brightness as desired. The pre-installed hook makes for easy and fast installation, while an alternative sturdy U-bracket is also included to mount the LED high bay light to the wall or ceiling and adjust it to the desired emitting angle. Whether you are replacing existing lights or installing new ones, the process is simple with LED high bay lights.



FEATURES

- LED driver with over-temperature protection function.
- Non-flicker and anti-glare PC lens will protect your eyes.
- Lamp body color: black or white (optional).
- IP65 rating.

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Wattage	Lumens	CCT	Voltage	Efficacy	Angle
DLUX-GEN2-MW240	150, 200, 240W (Selectable)	22500 - 36000LM	3000K, 4000K, 5000K, (Selectable)	120-277V 347-480V	150	90°
DLUX-GEN2-MW240-W						
DLUX-GEN2-MW300	200, 240, 300W (Selectable)	30000 - 45,000LM				
DLUX-GEN2-MW300-W						

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES PHASE WATTAGE COLOR OPTIONS WARRANTY

FIXTURE SERIES	
DLUX	Deco UFO Highbay Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW240	150, 200, 240W (selectable)
MW300	200, 240, 300W (selectable)
COLOR	
-	Black
W	White

OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Backup
HV	High Voltage
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DT8

A + B Tubes

DECO® | LIGHTING

DT8-GEN2

T8 LED Lamp Luminaire



LED T8 light bulbs are a great way to reduce your energy and maintenance expenses. They are highly efficient and last longer than traditional fluorescent lamps. TS bulbs come with either bi-pin or single-pin bases that can plug directly into matching light fixture sockets. This makes it easy to retrofit them into existing lighting setups in offices and warehouses. The best part is that TS bulbs do not require any specialty fixtures. They can be used as direct plug-and-play replacements without any fixture rewiring and operate off the existing fluorescent ballast.

FEATURES

- Universal Compatible Ballast
- No LGP, never yellowing
- High efficacy, up to 130 lm/W
- 5 Year Limited Warranty

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | ETL US Intertek | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Voltage	Efficacy	Angle
DT8-GEN2-2ABMW12	2 FT	5, 6, 8, 10W (Selectable)	650 - 1300LM	3000K, 3500K, 4000K, 5000K, 5700K, 6500K (Selectable)	120-277V	130 LM/W	140°
DT8-GEN2-4ABMW24	4 FT	10, 12, 15, 18, 24W (Selectable)	1300, 1560, 1950, 2340, 3120LM				
DT8-GEN2-8ABMW50	8 FT	24, 30, 35, 40, 50W (Selectable)	3120, 3900, 4550, 5200, 6500LM				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES | PHASE | SIZE | TYPE | WATTAGE | WARRANTY

FIXTURE SERIES	
DT8	Deco T8 Tubes
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
2	2 FT
4	4 FT
8	8 FT
TYPE	
AB	Type A (Ballast Compatible) +B (Ballast By-Pass)
WATTAGE	
MW10	5 to 10W (selectable) - 2FT ONLY
MW24	10, 12, 15, 18, 24W (selectable) - 4FT ONLY
MW50	24, 30, 35, 40, 50W (selectable) - 8FT ONLY

WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DCOMD

Commercial Downlight

DECO® | LIGHTING

DCOMD

Commercial Downlight

The DCOMD Commercial Down light is a versatile LED down light designed for a wide range of commercial interiors including offices, retail, hospitality, education, and healthcare environments. Available in multiple profile sizes with field-selectable CCT, the fixture supports both new construction and retrofit applications while delivering a code-compliant, energy-efficient lighting solution with a clean, modern aesthetic.



FEATURES

- Selectable CCT: 3000K / 3500K / 4000K
- Available in 4”, 6”, and 8” profiles
- Suitable for IC and Non-IC recessed locations
- Damp location rated
- 120—277V input, Triac dimming @ 120V

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL® | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Efficacy	CCT
BLP-GEN2-14MW40	4”	9W	83 LM/W	3000K 3500K 4000K (Selectable)
BLP-GEN2-22MW40	6”	18W	92 LM/W	
BLP-GEN2-MW45	8”	13W	85 LM/W	

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
BLP	Back-Lit Flat Panel Luminaire
PHASE	
GEN2	Generation II: Multi-Watt & Multi CCT
SIZE	
14	1’ x 4’
22	2’ x 2’
24	2’ x 4’

WATTAGE	
14MW40	20, 25, 30, 35, 40W (selectable)
22MW40	20, 25, 30, 40W (selectable)
MW45	36, 40, 45W (selectable)
MW38	18, 28, 38W (selectable)
MW72	40, 50, 72W (selectable)
OPTIONS	
-	None
EM	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

World's First Selectable Optic

SIGMA VORTEX

GEN 3

Flood Area Light

IP65 Listed · DLC LISTED PREMIUM · UL CERTIFIED · RoHS COMPLIANT · FC

30K 40K 50K

Quickship


GENERATION 3:

1. Multi-Watt
2. Multi-CCT
3. Multi-Optic *(U.S Patent Pending)*



Selectable Optics:

With optic switches, you can select the optics on the fly. It's the future of area light setup and installation.

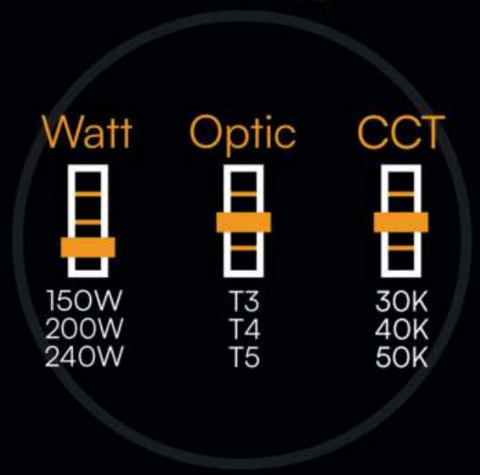

Mounting Options:

- U-Bracket
- Trunnion Mount
- Pole Mount
- Slip-Fitter Mount
- Universal Pole Mount

White & Black



Selectable Optics

Type 3 (T3)

Wider light distribution along sides



Type 4 (T4)

Directional 60° lateral width



Type 5 (T5)

Even light distribution in all directions



Product specifications, contents, and availability are subject to change without notice.

SIGMA Vortex

Flood Area Light

DECO® | LIGHTING

SVAL

SIGMA VORTEX Area Flood Light

GEN 3

Introducing the new Generation 3 Sigma Vortex Series, our new generation of LED fixtures. These lights are built with upgraded LED chips and a slimmer construction. The Sigma Vortex Series is an effective way to ensure that the surrounding areas of a facility are brightly illuminated, making it ideal for exterior applications. With selectable designed optics, wattages, lumen outputs, color temperatures, and several mounting options for wall or pole mounting, the energy-efficient Sigma Vortex Series is the ideal solution for industrial, commercial, and other area flood light applications. It is suitable for damp locations and has a lifespan of 100,000 hours. The fixture features a die-casting aluminum housing with a corrosion-resistant polyester powder coat finish and is integrated with a plug-and-play sensor port.



FEATURES

- Photocell built-in with On/Off switch
- Optional for field light distribution selectable (U.S. PATENT) Type II / Type IV, Type III/ Type V
- Rated for 50,000 hours @ SOC Ta
- Field wattage and CCT selectable
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Integrated with plug-and-play sensor port

GEN 3 · 5Yr Warranty (10 optional) · SELECT-A-WATT TECHNOLOGY · 0-10V DIMMABLE · UL · DLC LISTED PREMIUM

PERFORMANCE DATA

Model Number	Wattage	CCT	Lumens	Optics	Surge Protection	Voltage & Dimming
DSVAL-GEN3-MW240	150, 200, 240W (selectable)	3000K, 4000K, 5000K (selectable)	21000, 28000, 33600 LM	Type 3 Type 4 Type 5 (selectable)	L-N:6KV, UN-PE:6KV Optional (L-N:20KV, UN-PE:10KV)	120-277V 277V-480V 0-10 Dimming Standard
DSVAL-GEN3-MW240-W						
DSVAL-GEN3-MW300	200, 240, 300W (selectable)		28000, 33600, 42000 LM			
DSVAL-GEN3-MW300-W						

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / WATTAGE / COLOR / OPTIONS / WARRANTY

FIXTURE SERIES	
SVAL	DECO Sigma Vortex Area Flood Light
PHASE	
GEN3	Generation III: Multi Watt, Multi CCT & Optic Switchable
WATTAGE	
MW240	150, 200, 240W (selectable)
MW300	200, 240, 300W (selectable)
COLOR	
-	Bronze Finish (standard)
W	White Finish

OPTIONS	
-	None
E	Emergency Backup
MIC	Microwave Sensor
PIR	PIR Sensor
UM	U-Bracket
TM	Trunnion Mount
PM	Pole Mount
SF	Slip-Fitter Mount
HV	High Voltage
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DAL

Area Light

DECO® | LIGHTING

DAL

Area Light Luminaire

The LED large hyper area light boasts exceptional versatility, top-notch performance, and a modern, sleek profile, making it the go-to choice for a wide range of applications such as parking lots, car dealerships, shopping malls, downtown areas, healthcare facilities, college campuses, and business complexes. With various wattage options, lumen outputs, mounting choices, and different lens types, the limitless combinations of this LED light provide unparalleled on-site flexibility, making it the best option in the LED marketplace.



FEATURES

- Built in wattage and CCT selectable
- Integrated with plug-and-play sensor port
- Photocell on-off switch built-in
- Motion Sensor / PIR Sensor
- Optional: Type II, Type III, Type IV, Type V
- Non-flicker IP66
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish.
- Surge Protection: L-N:6KV, UN-PE:6KV Optional (L-N:20KV, UN-PE:10KV)
- Environment-friendly packaging

Projected Lifetime: L80 - 100,000 Hours

SELECT - A - WATT TECHNOLOGY | 0-10V DIMMABLE | 5Yr Warranty (10 optional) | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Wattage	Lumens	CCT	Voltage	Efficacy	Angle	Dim
DAL-GEN2-MW200	100, 150, 200W (Selectable)	15000, 25000, 33000LM	3000K, 4000K, 5000K (Selectable)	120-277V 347-480V	150LM/W	90°	0-10V Dim Standard
DAL-GEN2-MW300	200, 240, 300W (Selectable)	30000, 36000, 45000LM					

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / WATTAGE / COLOR / OPTIONS / WARRANTY

FIXTURE SERIES	
DAL	Deco Area Light Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW200	100, 150, 200W (selectable)
MW300	200, 240, 300W (selectable)
COLOR	
-	Bronze
W	White Coating

OPTIONS	
-	None
MS	Motion Sensor
HV	High Voltage
E	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DBKH

Wall Sconces

DECO® | LIGHTING

DBKH

Bulkhead Wall Sconces



The DBKH is a durable LED bulkhead wall sconce designed for reliability and versatility. Built with a die-cast aluminum housing and UV-stabilized polycarbonate lens, it resists corrosion and impact while delivering long-lasting performance. The fixture offers selectable wattage (20/24/28W), along with RGB-CW control for flexible applications. Features include a built-in daylight sensor with disable switch, broad voltage compatibility (120—277V), and optional emergency backup. Ideal for both commercial and residential environments, the DBKH combines rugged construction with adaptable lighting options 20/24/28W, 145lm/w, RGBCW, daylight sensor with switch.

FEATURES

- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Impact resistant UV stabilized polycarbonate lens
- Built in daylight sensor with disable switch
- UL, FCC, RoHS rated
- Working temperature : -40°C to 50°C 0°C to 45°C (for built-in emergency series)
- 5-year warranty for DOB series

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT -A- WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	CCT	Watts	Efficacy	Input Voltage
DBKH-GEN3-MW28	RGBCW	20, 24, 28W	145 LM/W	120 - 277V

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DBKH	Bulkhead Wall Sconces Luminaire
PHASE	
GEN3	Generation III: Multi Watt, Multi CCT
WATTAGE	
MW28	20, 24, 28W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
E	Emergency
MS-E	Motion Sensor and Emergency Driver
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

D440/441

Half Moon Wallpack

DECO® | LIGHTING

D440/441

UP/DOWN HALF MOON WALLPACK

The Half Moon Up/Down Wallpack is perfect for illuminating the perimeter of any commercial or industrial facility. This die-casting aluminum housing with corrosion resistant polyester powder coat finish. Standard with full cutoff design, optional for up light design. The series offers convenient operating features and superior lighting without flickering or humming. The UV stabilized polycarbonate lens is optically designed to enhance the light output effect of the lamp under the action of the internal reflector.



FEATURES

- Field wattage and CCT selectable
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Standard with full cutoff design, optional for up light design.
- UV stabilized polycarbonate lens.
- Surge Protection: L-N:4KV, UN-PE:6KV
- Operating Temperature: -40 ° F to 122 ° F

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Wattage	Lumens	CCT	Voltage	Efficacy	Angel
D441-GEN2-MW60	30, 45, 60W (Selectable)	6000, 7500, 9000LM	3500K, 4000K, 5000K (Selectable)	120-277V	145 LM/W	90°
D440-GEN2-MW100	60, 80, 100W (Selectable)	9000, 12000, 15000LM				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES PHASE WATTAGE OPTIONS WARRANTY

FIXTURE SERIES	
D441	Deco Down Half Moon Wallpack Luminaire
D440	Deco Up/Down Half Moon Wallpack Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW60	30, 45, 60W (selectable)
MW100	60, 80, 100W (selectable)

OPTIONS	
-	Bronze
W	White Coating
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DOWP

Wall Pack

DECO® | LIGHTING

DOWP

Bulkhead Wall Sconces

The DOWP is a versatile LED wall pack designed for efficiency and durability. With selectable wattage, it adapts easily to project needs. A built-in photocell sensor ensures automatic dusk-to-dawn control, while options for emergency backup provide extra reliability. Its die-cast aluminum housing and UV-stabilized lens deliver long-lasting performance in commercial and outdoor applications.



FEATURES

- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Impact resistant UV stabilized polycarbonate lens
- Built in daylight sensor with disable switch
- UL, FCC, RoHS rated
- Working temperature : -40°C to 50°C 0°C to 45°C (for built-in emergency series)
- 5-year warranty for DOB series

5Yr Warranty (10 optional) | 0-10V DIMMABLE | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	CCT	Watts	Efficacy	Input Voltage
DOWP-GEN2-MW28	RGBCW	20, 24, 28W	145 LM/W	120 - 277V

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DBKH	Bulkhead Wall Sconces Luminaire
PHASE	
GEN3	Generation III: Multi Watt, Multi CCT
WATTAGE	
MW28	20, 24, 28W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
E	Emergency
MS-E	Motion Sensor and Emergency Driver
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



DSWP

Slim Wallpack

DECO® | LIGHTING

DSWP

Slim Wallpack Luminaire



The Slim Wall Pack Series is perfect for illuminating the perimeter of any commercial or industrial facility. These fixtures are designed with a removable front housing for easy installation. The series offers convenient operating features and superior lighting without flickering or humming. The UV-resistant glass lampshade is optically designed to enhance the light output effect of the lamp under the action of the internal reflector.

FEATURES

- Field wattage and CCT selectable
- Glass Cover
- Built in daylight sensor with disable switch
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Impact resistant borosilicate glass
- Rated: IP65
- Surge protection: 80W/100W/120W--L-N:6KV, UN-PE:6KV

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Voltage	Efficacy	Angel
DSWP-GEN2-MW60	Width - 8.7”	30, 45, 60W (Selectable)	4050, 6075, 8100LM	3000K, 4000K, 5000K (Selectable)	120-277V 347V-480V	135 LM/W	90°
DSWP-GEN2-MW120	Width - 14”	60, 90, 120W (Selectable)	8100, 12150, 16200LM				

ORDERING INFORMATION


_____ /_____ /_____ /_____ /_____

SERIES | PHASE | WATTAGE | OPTIONS | WARRANTY

FIXTURE SERIES	
DSWP	Deco Slim Wallpack Luminaire
PHASE	
GEN2	Generation II, Multi Watts, Multi CCT
WATTAGE	
MW60	30, 45, 60W (selectable)
MW120	60, 90, 120W (selectable)

OPTIONS	
-	Bronze Coating
W	White Coating
HV	High Voltage
EM	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

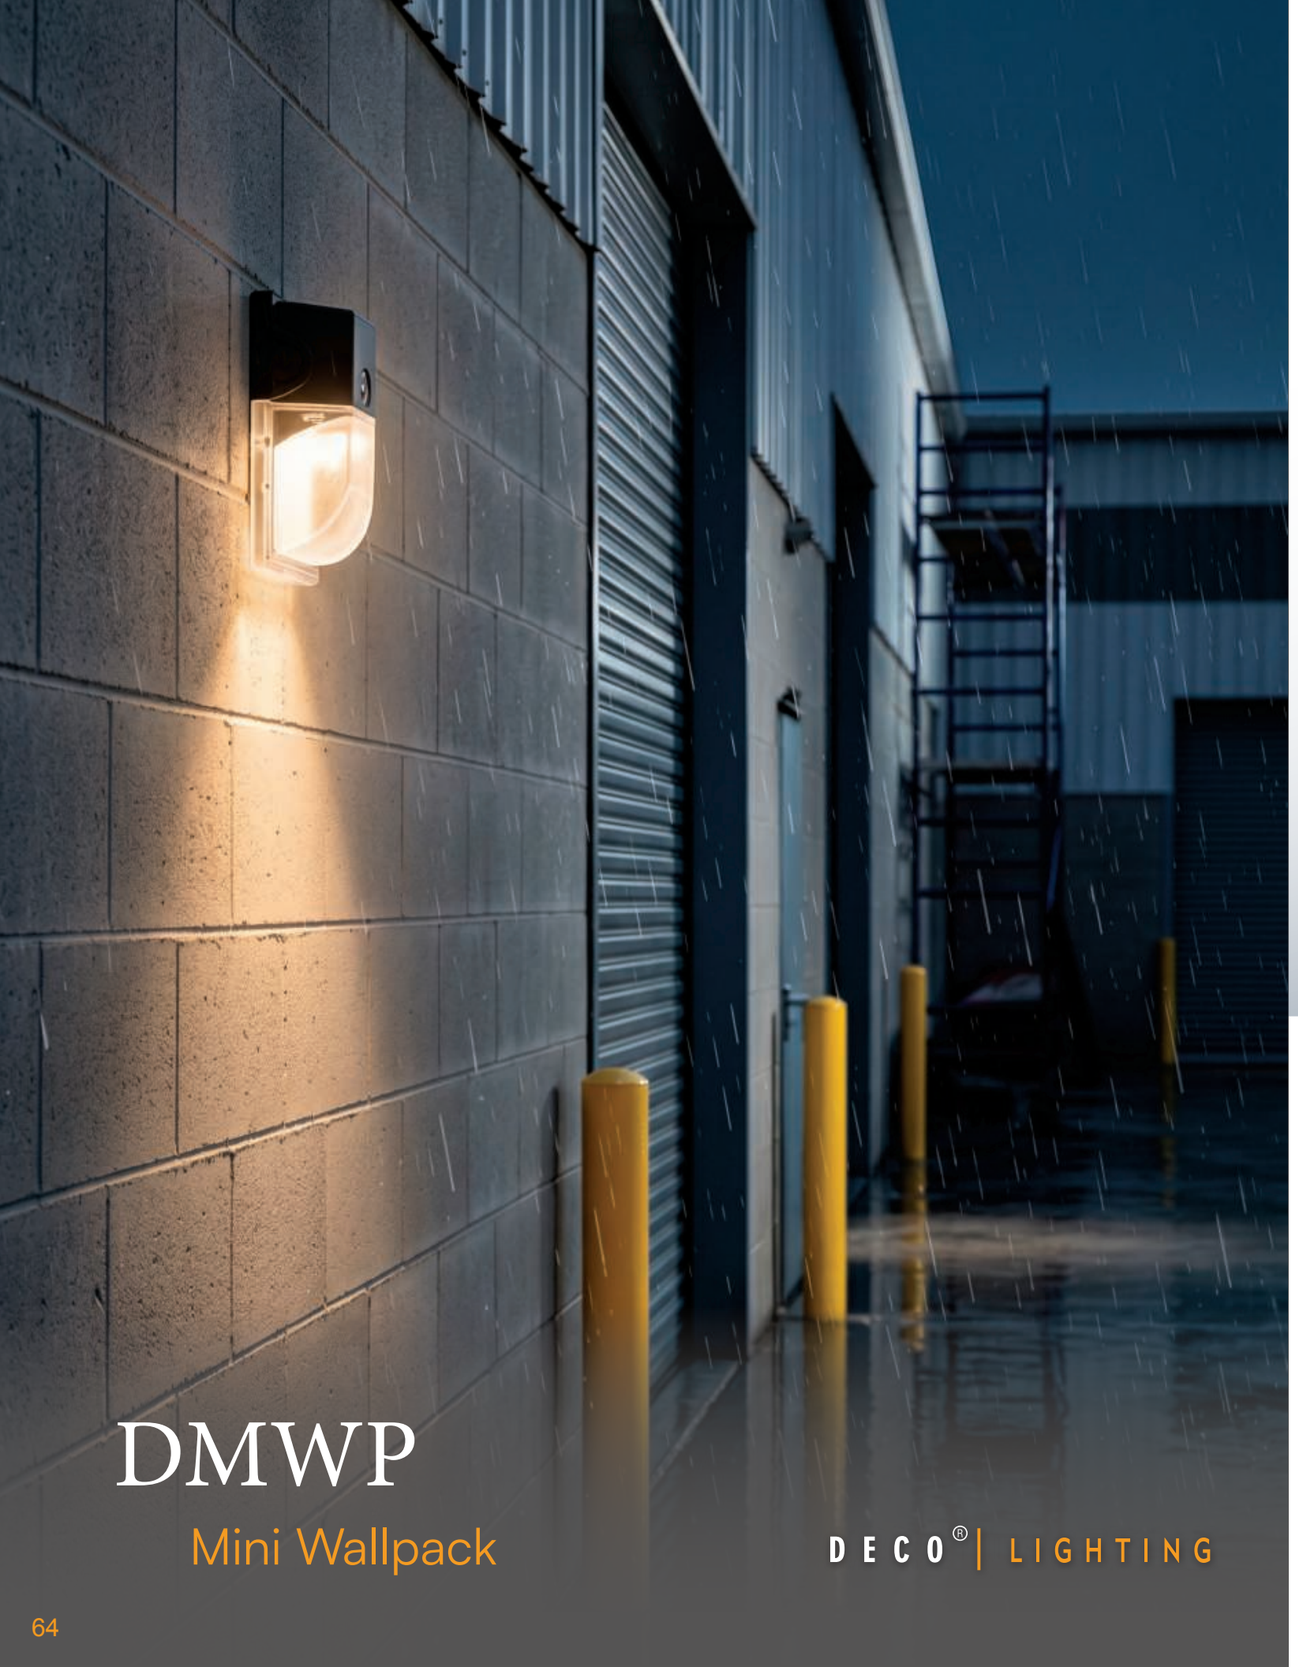

DMWP

Mini Wallpack

DECO® | LIGHTING

DMWP

Mini Wallpack Luminaire

The Mini-Wall Pack series consists of LED mini wall packs that provide excellent solutions for general outdoor lighting. These LED mini wall packs are perfect for doorways and perimeter lighting. The Mini-Wall Pack is designed for easy installation and features a built-in photocell for energy efficiency.



FEATURES

- Field wattage and CCT selectable
- Built in daylight sensor with switch
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Impact resistant UV stabilized polycarbonate lens
- Rating IP65
- Surge Protection: 20W/24W/28W--L-N:1 KV, UN-PE:2KV



5Yr Warranty (10 optional)

SELECT -A- WATT TECHNOLOGY

DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Wattage	Lumens	CCT	Voltage	Efficacy	Angel
DMWP-GEN2-MW28	20, 24, 28W (Selectable)	2900, 3480, 4060LM	3000K, 4000K, 5000K, (Selectable)	120-277V	145 LM/W	90°
DMWP-GEN1-28W-5K	28W	4060LM	5000K			

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES PHASE WATTAGE OPTIONS WARRANTY

FIXTURE SERIES	
DMWP	Deco Mini Wallpack Luminaire
PHASE	
GEN1	Generation I: Single Watt, Single Color
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW28	20, 24, 28W (selectable) - Gen 2 Only
28W-5K	28W - 5000K CCT - Gen 1 Only

OPTIONS	
-	Bronze
W	White Coating
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DCP

Square/Round Canopy

DECO® | LIGHTING

DCP

Canopy

The Canopy Series light is designed specifically for use in areas such as parking garages, car ports, driveways, underpasses, and similar locations. The fins between the grooves are designed to dissipate heat effectively. Professional light distribution techniques, high reflectivity reflectors, and a 140° beam angle are available. The lens has a light transmission rate of over 90%. It has UL certification, making it safe and reliable.





FEATURES

- Main body is made of Die-casting aluminum
- The diffuser is a clear/opal anti-UV prismatic glass for high efficiency and vandal resistance.
- Lumileds 3030 LED chip and KERHAM driver as regular, Sosen, Meanwell driver options.
- Tamper proof fixings for increased vandal resistance.
- Anti-UV electrostatic powder spraying, regular color: Black, Silver, RAL7043, RAL7016.
- IP65 rating water and rust proof protection.
- IK08 rating housing protection
- Sensing Function

APPLICATIONS

- Parking lots, Walk ways, Courtyards, Balcony, Vilas, Gardens

Lifetime: L80 - 100,000 Hours

5Yr Warranty (10 optional) | SELECT - A - WATT TECHNOLOGY | 0-10V DIMMABLE | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Model Number	Wattage	CCT	CRI	Angle	Efficacy	Input Voltage
DCPS-GEN2-MW90	40, 60, 90W (selectable)	3000K, 4000K, 5000K (selectable)	>80	90°	>130 LM/W	AC 120-277V AC 120 - 347V 0-10V Dimming
DCPO-GEN2-MW90-W						

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / WATTAGE / COLOR / OPTIONS / WARRANTY

FIXTURE SERIES	
DCPS	Deco Canopy Square
DCPO	Deco Canopy Round
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW90	40, 60, 80W (selectable)

COLOR	
-	Bronze Finish - DCPS only
W	White Finish - DCPO only
OPTIONS	
-	None
E	Emergency Function
SE	Sensing Function
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DVT

Vapor Tight

DECO® | LIGHTING

DVT

Vapor Tight Luminaire

Introducing our LED Vapor Tight Light, representing the perfect combination of durability and design. These lights are specifically engineered to meet the robust lighting requirements of challenging environments, effectively resisting moisture, dust, and other external factors to ensure consistent and bright illumination. Immerse yourself in the superior resilience of these lights and brighten up your spaces. Our 4FT LED vapor tight light offers customizable options, including selectable wattage and colors, to suit any environment. By merging energy efficiency with durability, this lighting solution guarantees long-lasting and adaptable illumination



FEATURES

- 3Watts 3CCT, same design with old vapor
- Meet all color demands, Easy install.
- Extruded opal prismatic material with UV protection End Caps: white PC material
- The housing features a liquid silicone perimeter gasket, which seamlessly seals and guards against dust and humidity.
- This product features stainless steel clips for secure fastening and holding together fixture components.

5Yr Warranty (10 optional) | SELECT -A- WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	Size	Wattage	Lumens	CCT	Voltage	Efficacy	Angle
DVT-GEN2-4MW54	4 FT	38, 46, 54W (Selectable)	4940, 5980, 7020LM	3500K, 4000K, 5000K (Selectable)	120-277V	130 LM/W	100°
DVT-GEN2-8MW90	8 FT	65, 75, 90W (Selectable)	8450, 9750, 11700LM				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES | PHASE | SIZE | WATTAGE | OPTIONS | WARRANTY

FIXTURE SERIES	
DVT	Deco Vapor Tight Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
SIZE	
4	4 FT
8	8 FT
WATTAGE	
MW54	38, 46, 54W (selectable)
MW90	65, 75, 90W (selectable)

OPTIONS	
-	None
MS	Motion Sensor
EM	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

Square/Round Pole

Pole Stop

DECO® | LIGHTING

DPS & DPR

Steel Square & Round Poles

Anchorage Kit will include four (4) L-shaped Steel Anchor Bolts Conforming to AASHTO M314-90 Grade 55. Ten inches (10”) of Threaded end will be galvanized per ASTM A153. Kits will contain eight (8) Hex Nuts, four (4) Lock Washers, and eight (8) Flat Washers (all components Galvanized Steel). A paper bolt circle template will be provided.

FEATURES

- Removable Pole Cap
- Wall gauge Straight Steel Tube ASTMA500 Grade B Steel
- 4-Bolt Base cover



FIXTURE SERIES	
DPS / DPR	DecoPole Square / Round
BUTT SQ.	
4	4”
5	5”
6	6”
HEIGHT	
10	10’
12	12’
14	14’’
15	15’
16	16’
18	18’
20	20’
22	22’
25	25’
28	28’
30	30’
35	35’
39	39’
GAUGE	
7	7
11	11
MOUNTING	
TN238	2 3/8” x 4” Tenon
TN3	3” x 4” Tenon
OT	Other Tenon Mt_

DRILL MOUNT	
DM1	Drill Mount DM1
DM2180	Drill Mount DM2180
DM290	Drill Mount DM290
DM390	Drill Mount DM390
DM490	Drill Mount DM490
DM3120	Drill Mount DM3120
FINISH	
BZ	Bronze
BL	Black
WH	White
GY	Grey
GR	Green
CU	Custom Paint (Consult Factory)
FINISH OPTIONS	
GLV	Galvanized
OPTIONS	
C12	Threaded 1/2” Coupling
C32	Threaded 13/4” Coupling
C10	Threaded 1” Coupling
EHH	Extra Handhold
GF1	Duplex GFI Receptacle (WR) with cover
GF2	Duplex GFI Receptacle (WR) with In-Use Cover
LAB	Less Anchor Bolts
LPC	Less Pole Cap
PAB	Pre-Shipped Anchor Bolts
VDA	Vibration Damper

Product specifications, contents, and availability are subject to change without notice.

SORA

Slim Flush Mount Round

DECO® | LIGHTING

SORA

Slim Flush Mount Round

Sora brings ultra-thin performance to everyday ceilings. At just 0.56” thick, this versatile flush mount blends seamlessly into residential, multifamily, and hospitality spaces. With five selectable color temperatures, a clean 90+ CRI output, and sizes from 5” to 11”, Sora delivers high-efficiency lighting with a low profile design. Damp and wet location rated, surface or recessed install-ready, and available with optional decorative trim.



FEATURES

- Size 5’’, 7’’, 9’’, 11’’are available.
- Ultra thin profile, thickness is only 0.56 inch
- Compatible with Surface mounted, recessed Retrofit installation
- 5CCT (2700K-3000K-3500K-4000K-5000K) selectable
- Decorating colorful ring available
- With EM function option (Only for 7”)
- Suit for damp or wet location
- Triac Dimming

5Yr Warranty (10 optional) | SELECT -A- WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	CCT	Watts	Lumen (3000K)	CRI	Input Voltage
DSFUSH-GEN1-5-9.5W-CCT	2700K 3000K 3500K 4000K 5000K (Selectable)	10W	800 LM	90	120 - 277V
DSFUSH-GEN1-7-12W-CCT		12W	1000 LM		
DSFUSH-GEN1-9-18W-CCT		18W	1260 LM		
DSFUSH-GEN1-12-26W-CCT		26W	2000 LM		

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DSFUSH	Slim Flush Mount Round
PHASE	
GEN1	Generation I: Single Watt, Multi CCT
SIZE	
5	5 Inches
7	7 Inches
9	9 Inches
12	12 Inches
WATTAGE	
9.5W-CCT	10W
12W-CCT	12W
18W-CCT	18W
26W-CCT	26W

OPTIONS	
	None
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

ORRIN

Double Ring Flush Mount

Orrin pairs practical performance with quiet elegance. Its dual-ring brushed nickel design and frosted lens create a soft, architectural presence—ideal for residential and multi-family ceilings. With selectable wattage and five color temperatures (2700K—5000K), Orrin offers flexible lighting with 90+ CRI clarity. Available in 12”, 14”, 16”, and 18” sizes, it supports sensor and emergency options, and installs easily with a patented one person mounting system. Damp-rated and Title 24 compliant.



FEATURES

- One person installation with patent Knuckle design.
- Durable white polymer diffuser
- Brushed stainless steel accent design
- Multiple CCT and Wattage Selectable
- Low noise driver solution
- Sensor & EM version for option
- ETL, T24, FCC,

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	CCT	Watts	Lumen (3000K)	CRI	Input Voltage
DDRING-GEN2-12MW16	2700K, 3000K, 3500K, 4000K, 5000K (selectable)	12, 14, 16W	800 LM	90	120 - 277V
DDRING-GEN2-14MW22		15, 18, 22W	1000 LM		
DDRING-GEN2-16MW24		18, 21, 24W	1260 LM		
DDRING-GEN2-18MW32	3000K, 4000K, 5000K (selectable)	24, 28, 32W	2000 LM		

ORDERING INFORMATION

_____ / _____ / _____ / _____ / _____ / _____

SERIES / PHASE / SIZE / WATTAGE / OPTIONS / WARRANTY

FIXTURE SERIES	
DDRING	Double Ring Surface Fixture
PHASE	
GEN2	Generation II: Single Watt, Multi CCT
SIZE	
12	12 Inches
14	14 Inches
16	16 Inches
18	18 Inches
WATTAGE	
MW16	12, 14, 16W (selectable)
MW22	15, 18, 22W (selectable)
MW24	18, 21, 24W (selectable)
MW32	24, 28, 32W (selectable)

OPTIONS	
-	None
E	Emergency Backup
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.



ORRIN

Double Ring Flush Mount

DECO | LIGHTING



MIRA

Disk Flush Mount

DECO® | LIGHTING

MIRA

Disk Flush Mount

Mira is a low-profile disk light designed for clean, seamless ceiling installs. Its slim edge design hugs tight to the ceiling, while the frosted diffuser delivers soft, glare-free illumination. With 90+ CRI, smooth 10%—100% dimming, and five selectable color temperatures (2700K—5000K), Mira adapts easily to any room. Wet-location rated and J-box/recessed can compatible, it's a versatile choice for bathrooms, kitchens, corridors, and more.



FEATURES

- Slim and drop edge design, stick tight with the ceiling after installation.
- Wet location rated, suitable for bathroom application.
- Flexible installation options, it fits everywhere you have J-box,
- Recessed can.
- Smooth dimming from 10% to 100%, compatible to most of the popular dimmers.
- CRI 90+

5Yr Warranty (10 optional) | SELECT-A-WATT TECHNOLOGY | UL | DLC LISTED PREMIUM

PERFORMANCE DATA

Product ID	CCT	Watts	Lumen (3500K)	CRI	Input Voltage
DDISC-GEN1-6-12W-CCT	2700K, 3000K, 3500K, 4000K, 5000K (selectable)	12W	1000LM	90	120 - 277V

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____ /_____

SERIES | PHASE | SIZE | WATTAGE | OPTIONS | WARRANTY

FIXTURE SERIES	
DDISC	Slim Surface Fixture
PHASE	
GEN1	Generation I: Single Watt, Multi CCT
SIZE	
6	6 Inches
WATTAGE	
12W-CCT	12 Watts, Multi CCT

OPTIONS	
	None
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

NOTES

NOTES



DECO® | LIGHTING

Location
2917 Vail Ave Commerce,
CA 90040

Contact
sales@getdeco.com
(323)-366-5522

www.GetDeco.com

© 2026 DECO LIGHTING. All rights reserved. No part of this catalog may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without written permission from the publisher.

Product specifications, contents, and availability are subject to change without notice.