CLEAVER **DWSL-G3** COVE LIGHT



CLEAVER **DWSL-G4** COVE LIGHT



CLEAVER **DWSL-G5** COVE LIGHT



DECO® | LIGHTING

2026-2027 CATALOG

INDOOR / OUTDOOR COVE LIGHTING

DECO® | LIGHTING



Table of content

03 ABOUT US
Deco Lighting

04-05 MEET MANNY
Deco Lighting's Linear LED Lighting Expert


06-09 CLEAVER G3 COVE LIGHT
LED Exterior IP65 Architectural Cove

10-13 CLEAVER G4 COVE LIGHT
LED Exterior IP66 Architectural Cove

14-17 CLEAVER G5 COVE LIGHT
LED Interior Cove

18-19 RGBW G3 COVE LIGHT
RGBW Exterior IP65 Architectural Cove

ABOUT OUR COMPANY

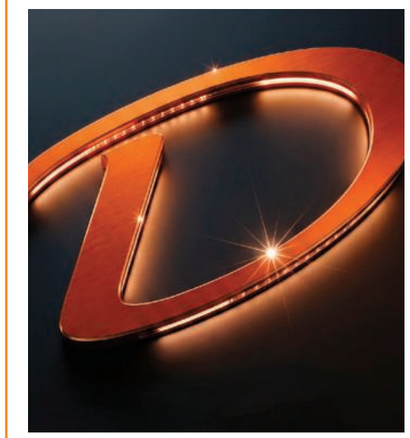

Deco Lighting is an advanced-technology LED lighting company that delivers comprehensive, end-to-end solutions for the architectural and energy markets. We design and develop LED solutions that deliver superior quality, great energy-efficiencies, and smart system connectivity.

Deco's goal is to serve everyone from designers to electricians with a strong list of beautiful and sustainable luminaires. Deco Lighting's commitment to quality is the driving force behind our innovative foundation, allowing us to continue to create fixtures that will shape today's industry and beyond.

WWW.GETDECO.COM

Product specifications, contents, and availability are subject to change without notice.

Meet Manny



Manny Guerrero | VP Of Sales & Deco Lighting's Linear LED Lighting Expert

DECO® | LIGHTING

At **Deco Lighting**, we believe exceptional lighting begins with understanding both the technology and the architecture it is designed to illuminate.

Manny is Deco Lighting's Linear LED Lighting Expert, bringing extensive knowledge and hands-on experience in architectural lighting, with a particular focus on advanced linear LED solutions.

Manny works closely with architects, lighting designers, interior designers, electrical engineers, contractors, and project teams to help transform design concepts into practical, high-performance lighting solutions.

His expertise includes continuous linear lighting, recessed, surface-mounted and suspended systems, cove and indirect lighting, wall washing and grazing, custom LED configurations, high-CRI lighting, tunable white, RGB/RGBW, dimming, and intelligent lighting controls.

For every application, Manny considers the complete lighting system–from light output, optics, color temperature and CRI to glare control, thermal management, controls, installation requirements, and architectural integration.

Whether designing a subtle continuous line of light or developing a customized architectural lighting solution, **Manny and the Deco Lighting team are committed to delivering the right balance of performance, aesthetics, efficiency, and flexibility.**

AREAS OF EXPERTISE

Architectural Linear LED Lighting

Continuous & Seamless Lines of Light

Recessed, Surface & Suspended Systems

Cove & Indirect Lighting

Wall Washing & Grazing

Custom Linear LED Solutions

High-CRI & Tunable White

RGB & RGBW Applications

Dimming & Lighting Controls

Smart Building Integration

Custom Profiles & Configurations

Specification & Application Support

DECO LIGHTING

Engineering Light. Enhancing Architecture.

WWW.GETDECO.COM

Product specifications, contents, and availability are subject to change without notice.

CLEAVER G3 COVE LIGHT


LED Exterior IP65 Architectural Cove



G3


Product image






5Yr Warranty (10 optional) | 0-10V DIMMABLE | DLC LISTED PREMIUM | IP65 | 512 DMX | Linkable | ETL US Intertek

BEAM ANGLE

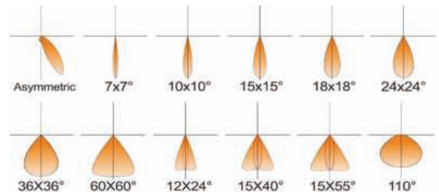

Cove lighting is a type of indirect lighting that is typically installed along the perimeter of a ceiling. The light source is hidden from view, which creates a soft, ambient glow within a space. This lighting technique is popular in both residential and commercial settings, primarily due to its versatility and aesthetic appeal. Cove lighting can enhance architectural features, create mood, and serve functional purposes without overwhelming harshness often associated with traditional lighting fixtures.

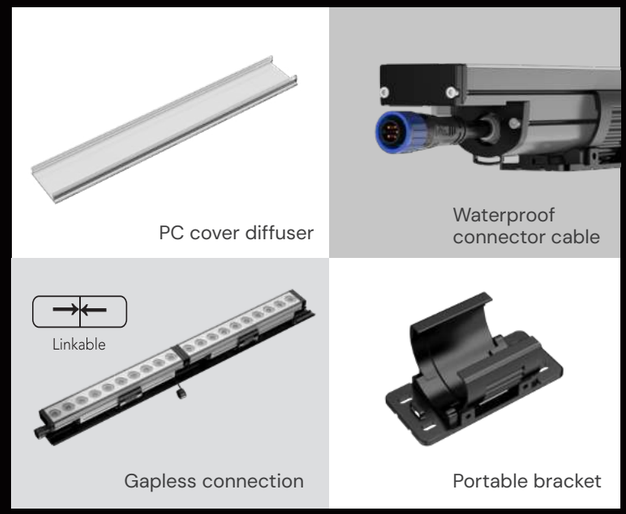


Product specifications, contents, and availability are subject to change without notice.

G3

ARCHITECTURAL COVE

New Collection

DECO® | LIGHTING

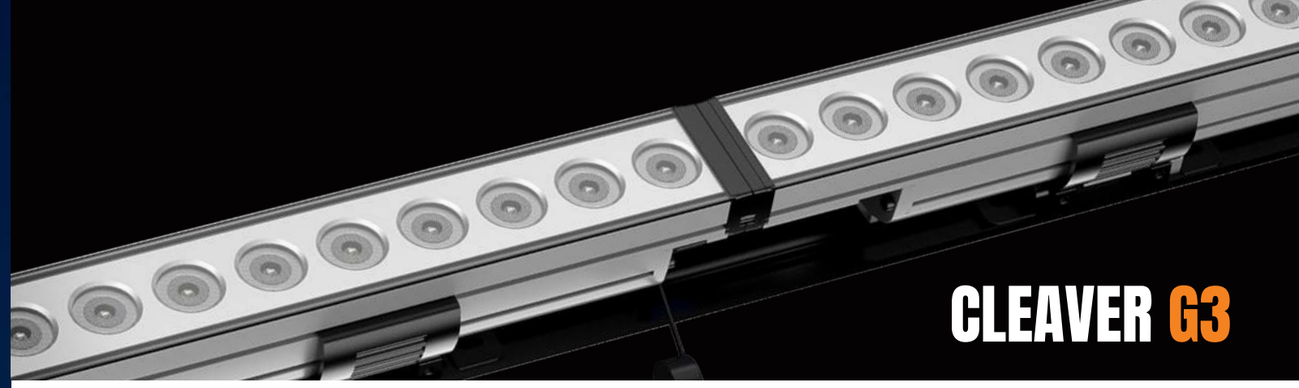

CLEAVER G3

PRODUCT FEATURES

- IP65 Rated, Suitable for Wet Locations
- 12 precision bi-directional optical layouts
- Supports runs up to 165 ft @ 277V / 72 ft @ 120V (White)
- High CRI & tight color consistency 80+ or 90+ CRI (SDCM 3)
- Dimming via DMX512 or 0-10V (1%–100%)
- Premium LED chips with optimized thermal design for stable output and extended lifetime

DIMENSIONS



PERFORMANCE DATA

Product ID	Dimension	Wattage	Beam Angle	Lumens	CCT	Voltage	Efficacy	Dimming
DWSL-G3-1MW10	1FT L309xH54xW69mm	10W	110°PC Clear Diffuser	800-900lm	2700K/3000K/ 3500K/4000K/ 5000K Single CCT	AC120-277V	80-90lm/W	0-10V (1-100%)
DWSL-G3-4MW40	4FT L1194xH54xW69mm	40W		3200-3600lm				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES / SIZE / WATTAGE / OPTIONS / WARRANTY

Product ID	Size	Wattage	Dimming	CCT	WARRANTY	
DWSL-G3-1MW10	1FT	10W	0-10V (1-100%)	27K/30K/35K/40K/50K (Single CCT)	5	5 Year Warranty (included)
DWSL-G3-4MW40	4FT	40W			10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

CLEAVER G4 COVE LIGHT


LED Exterior IP66 Architectural Cove



G4


Product image






5Yr Warranty (10 optional)
0-10V DIMMABLE
DLC LISTED PREMIUM
IP66
Linkable
ETL US Intertek

BEAM ANGLE

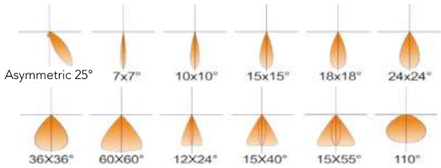

Cleaver G4 Ideal for architectural facades, wall grazing, wall washing, and outdoor accent lighting, leveraging its IP66 rating and adjustable mounting angle for versatile outdoor use. Designed for precise illumination in commercial, landscape, and exterior architectural applications.

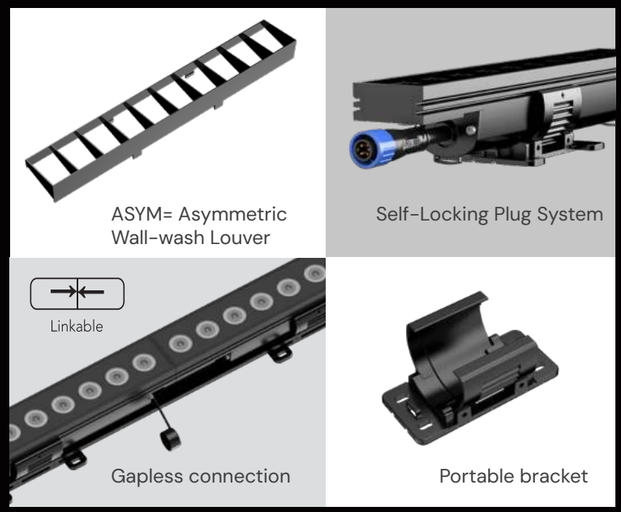


Product specifications, contents, and availability are subject to change without notice.


G4

New Collection

DECO® | LIGHTING

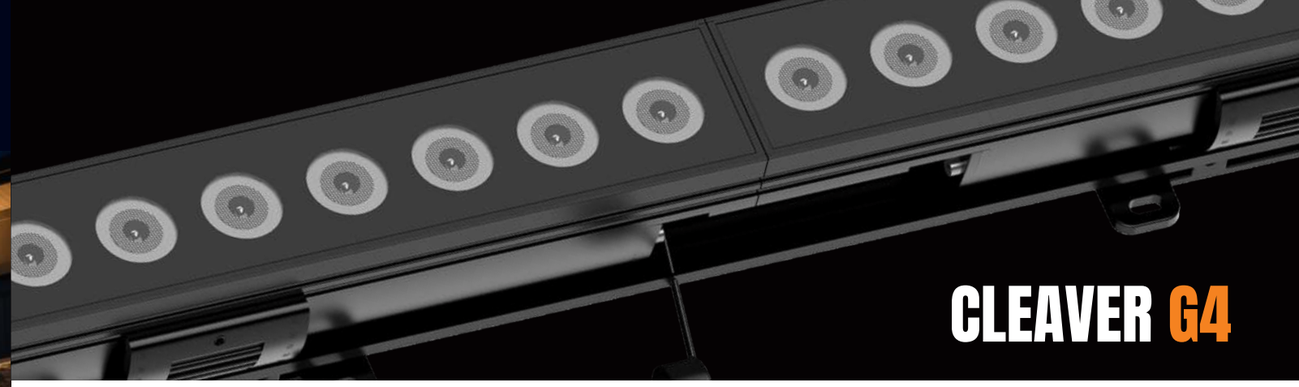

CLEAVER G4

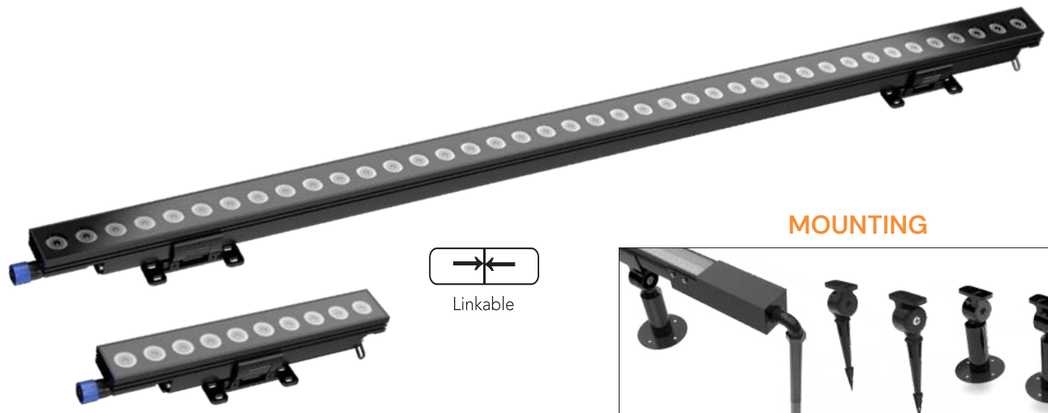

Linkable

MOUNTING

Adjustment: Multi-scenario mounting options including wall mount, ceiling mount and arm bracket wall mount for signage advertising; fixture angle adjustable by ±60°.

PRODUCT FEATURES

BEAM ANGLE

- Ideal for architectural facades, wall grazing, wall washing, and outdoor accent lighting, leveraging its IP66 rating and adjustable mounting angle for versatile outdoor use.
- Designed for precise illumination in commercial, landscape, and exterior architectural applications.

CONSTRUCTION

- Housing: Black anodized extruded aluminum housing matched with die-cast mounting brackets, delivering premium texture, and rated IP66 for waterproof performance.
- End Caps: S crewless welded aluminum end caps with powder-coat finish to enhance structural rigidity and corrosion resistance.
- Optical Lens: Tempered glass cover paired with 12 optional beam angle lenses for wider application coverage.

PERFORMANCE DATA

Product ID	Dimension	Watt.	Beam Angle	Lumens	CCT	Voltage	Efficacy	Dimming
DWSL-G4-1MW10	1FT L305xH54xW69mm	10W	Optical lens 7×7°, 10×10°, 15×15° 24×24°, 36x36°, 60x60°, 12×24°, 15×40°, 15×55°, Asymmetric 25° Frosted cover:110°	700lm(27K-30K) 800-850lm(35K-40K-50K)	2700K/3000K/ 3500K/4000K/ 5000K Single CCT	AC120-277V	70lm/W (27K-30K) / 80-90lm/W (35K-40K-50K)	0-10V (1-100%) (Standard) / DALI (Optional) / TRIAC (Optional)
DWSL-G4-4MW40	4FT L1190xH54xW69mm	40W		2800lm(27K-30K) 3200-3400lm(35K-40K-50K)				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES / SIZE / WATTAGE / OPTIONS / WARRANTY

Product ID	Size	Wattage	Dimming	CCT	WARRANTY	
DWSL-G4-1MW10	1FT	10W	0-10V (1-100%)	27K/30K/35K/40K/50K (Single CCT)	5	5 Year Warranty (included)
DWSL-G4-4MW40	4FT	40W			10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

CLEAVER G5 COVE LIGHT

LIGHTING IS NOT JUST ABOUT LIGHT.
IT'S ABOUT HUMAN EXPERIENCE.

LED Interior Cove






G5

Product image






5Yr Warranty (10 optional)
DLC LISTED PREMIUM
Linkable
ETL US Intertek

BEAM ANGLE

Cleaver G5 Cove lighting is an architectural design technique that uses hidden light fixtures to project a soft, uniform, and glare-free illumination off a reflective surface.

ADJUSTABLE, MOUNTING BRACKET





Injection-molded adjustable mounting bracket provides ±40° aiming adjustment. At 30°, the fixture reaches its maximum overall height. Suitable for surface, ceiling, or vertical installation. The bracket uses a friction-lock design to secure the aiming position.



Product specifications, contents, and availability are subject to change without notice.

G5




3000K 3500K 4000K








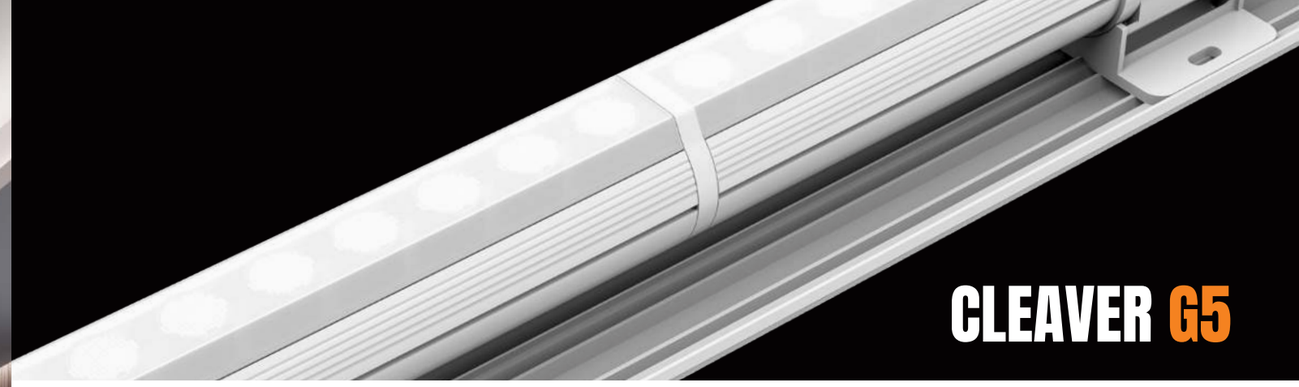

CLEAVER G5

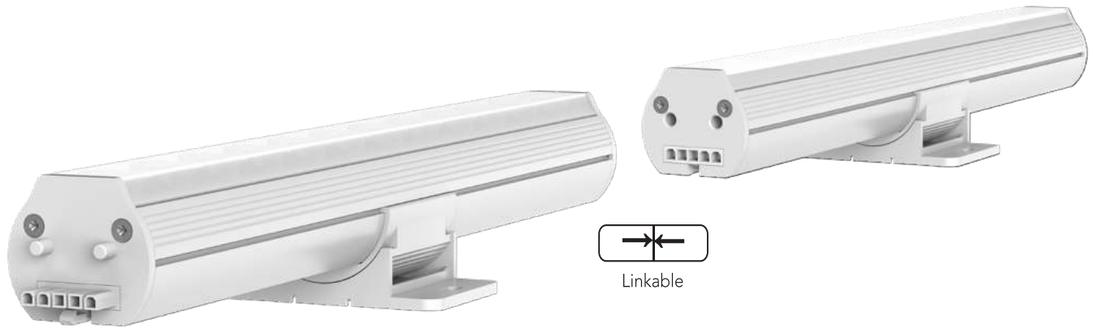

PRODUCT FEATURES

APPLICATIONS

- Versatile Lighting: Ideal for architectural coves, wall washing, and accent lighting in offices or retail spaces.
- Pro Grad: Designed for commercial environments requiring clean, uniform, and low-glare light.

CONSTRUCTION

- Extruded aluminum housing with powder-coated finish for enhanced durability and thermal performance.
- Compact design: low-profile modular construction with precision end caps for a seamless appearance.
- End caps: high-strength engineered plastic for lightweight durability and clean detailing.
- Injection-molded adjustable mounting bracket with ±40° tilt adjustment.

MOUNTING

- Surface Mount: Optimized for fast ceiling or wall installation.
- Flexible Aiming: Easily adjust the light beam with a +/- 40° tilting bracket to highlight any area.

PERFORMANCE DATA

Product ID	Dimension	Watt-Select	Beam Angle	Max Lumens	CCT	Voltage	Efficacy	Dimming
DWSL-G5-1MW5	1FT 306×W69xH46.2mm	5W/7.5W/10W	110°	1200lm	3000K/ 3500K/ 4000K/ Select	AC120-277V	1200lm/W	0-10V 5-100%)
DWSL-G5-4MW20	4FT L1206×W69×H46.2mm	20W/30W/40W		4800lm				

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____

SERIES SIZE WATTAGE OPTIONS WARRANTY

Product ID	Size	Wattage	Dimming	CCT	WARRANTY	
DWSL-G5-1MW5	1FT	5W/7.5W/10W	0-10V (5-100%)	30K/35K/40K? (Select)	5	5 Year Warranty (included)
DWSL-G5-4MW20	4FT	20W/30W/40W			10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

RGBW G3 COVE LIGHT


LED Exterior IP65 Architectural Cove



New Collection


DECO® LIGHTING



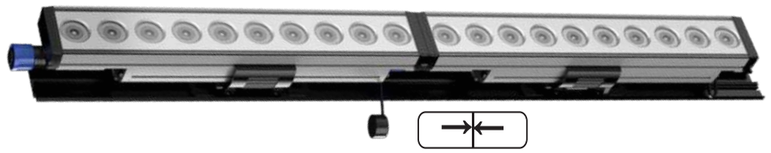


5Yr Warranty (10 optional) · 0-10V DIMMABLE · DLC LISTED PREMIUM · SST SELECTABLE · 512 DMX · Linkable · ETL US Intertek

RGBW Lighting Control Solution



Bluetooth Control(UB4): Wireless and user-friendly with quick preset color modes. Simple to install and ideal for easy scene switching.
DMX Control (WiFi-RDM01) :Professional system offering remote configuration and multi-device management, perfect for precise and synchronized lighting effects.

BEAM ANGLE

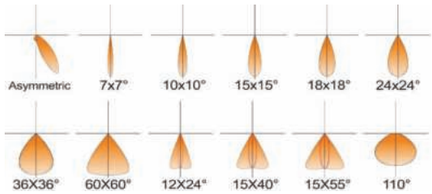

PRODUCT FEATURES

ELECTRICAL

Standard 0-10V smooth dimming (1%-100%)
- Optional TRIAC dimming and DALI control
- Optional wired DMX512 and wireless control solutions available
- Dim-to-Warm functionality available for warm dimming applications
- Optional Bluetooth 5.0 SIG Mesh connectivity for RGBW models
- Self-locking quick connectors with optional cable routing accessories

CONSTRUCTION

- Extruded aluminum housing with anodized surface, suitable for harsh outdoor environments.
- Co-extruded weather-resistant PC diffuser, rated for outdoor applications.
- Die-cast end caps with silicone gaskets for superior IP65 waterproof performance.
- Die-cast end caps matched with nylon clips, enabling 120° rotation and compatible with positioning brackets.

MOUNTING

- ±60° adjustable aiming range
- Multi-surface installation for wall, ceiling, and surface mounting

PERFORMANCE DATA

Product ID	Dimension	Wattage	Beam Angle	Lumens	CCT	Voltage	Efficacy	Dimming
DWSL-G3RGB-1MW10	1FT L309xH54×W69mm	10W	15°x15°,24°x24°, 36°x36°,60°x60°, 15x40°,15x55°Optic	800-900lm	RGBW [Red:610-620nm Green:520-535nm Blue:450-475nm White:27K-90K]	DC24V	Mix:43lm/W Red:27lm/W Green80lm/W Blue:21lm/W White:46lm/W	0-10V(1%-100%)
DWSL-G3RGB-4MW40	4FT L1194×H54xW69mm	40W		3200-3600lm				DMX512 Control

ORDERING INFORMATION

_____ /_____ /_____ /_____ /_____
SERIES SIZE WATTAGE OPTIONS WARRANTY

Product ID	Size	Wattage	Dimming	CCT	WARRANTY	
DWSL-G3RGB-1MW10	1FT	10W	0-10V(1%-100%)	RGBW	5	5 Year Warranty (included)
DWSL-G3RGB-4MW40	4FT	40W	DMX512 Control		10	10 Year Warranty

Product specifications, contents, and availability are subject to change without notice.

DECO® | LIGHTING



Location
2917 Vail Ave Commerce,
CA 90040

Contact
sales@getdeco.com
(323)-366-5522

www.GetDeco.com

© 2026 DECO LIGHTING. All rights reserved. No part of this catalog may be reproduced or transmitted in any form or by any means, electronic or mechanical, including photocopying, recording, or by any information storage and retrieval system, without written permission from the publisher.

Product specifications, contents, and availability are subject to change without notice.