

# DMWP

## Mini Wallpack Luminaire

The Mini-Wall Pack series consists of LED mini wall packs that provide excellent solutions for general outdoor lighting. These LED mini wall packs are perfect for doorways and perimeter lighting. The Mini-Wall Pack is designed for easy installation and features a built-in photocell for energy efficiency.

|          |  |
|----------|--|
| Client:  |  |
| Order#:  |  |
| Project: |  |
| Type:    |  |

### FEATURES

- Field wattage and CCT selectable
- Built in daylight sensor with switch
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Impact resistant UV stabilized polycarbonate lens
- Rating IP65
- Surge Protection: 20W/24W/28W--L-N:1 KV, UN-PE:2KV



### PERFORMANCE DATA

| Product ID       | Wattage                     | Lumens           | CCT                                  | Voltage  | Efficacy | Angel |
|------------------|-----------------------------|------------------|--------------------------------------|----------|----------|-------|
| DMWP-GEN2-MW28   | 20, 24, 28W<br>(Selectable) | 2900, 3480, 4060 | 3000K, 4000K, 5000K,<br>(Selectable) | 120-277V | 145      | 90°   |
| DMWP-GEN1-28W-5K | 28W                         | 4060             | 50K                                  |          |          |       |


### ORDERING INFORMATION

DMWP / GEN2 / / / /  
SERIES PHASE WATTAGE OPTIONS WARRANTY

| FIXTURE SERIES |                                         |
|----------------|-----------------------------------------|
| DMWP           | Deco Mini Wallpack Luminaire            |
| PHASE          |                                         |
| GEN1           | Generation I: Single Watt, Single Color |
| GEN2           | Generation II: Multi Watt, Multi CCT    |
| WATTAGE        |                                         |
| MW28           | 20, 24, 28W (selectable) - Gen 2 Only   |
| 28W-5K         | 28W - 5000K CCT - Gen 1 Only            |


| OPTIONS  |                            |
|----------|----------------------------|
| -        | Bronze                     |
| W        | White Coating              |
| WARRANTY |                            |
| 5        | 5 Year Warranty (included) |
| 10       | 10 Year Warranty           |

Dimensions

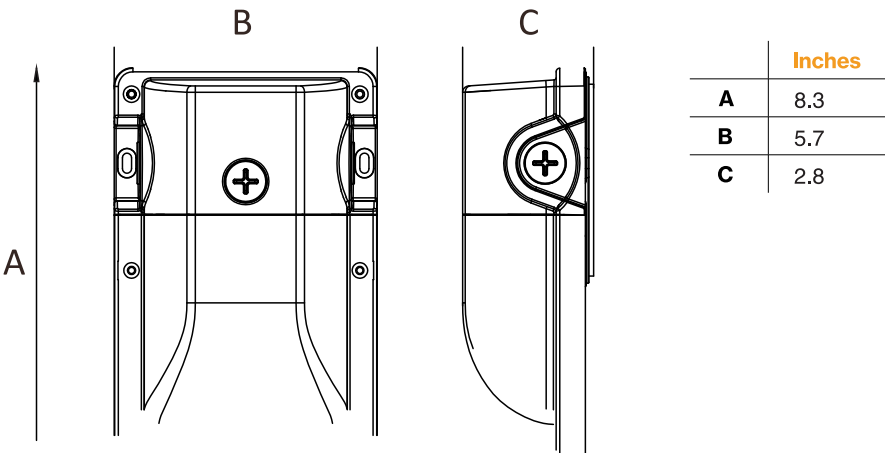

Photometrics

28W 5000K

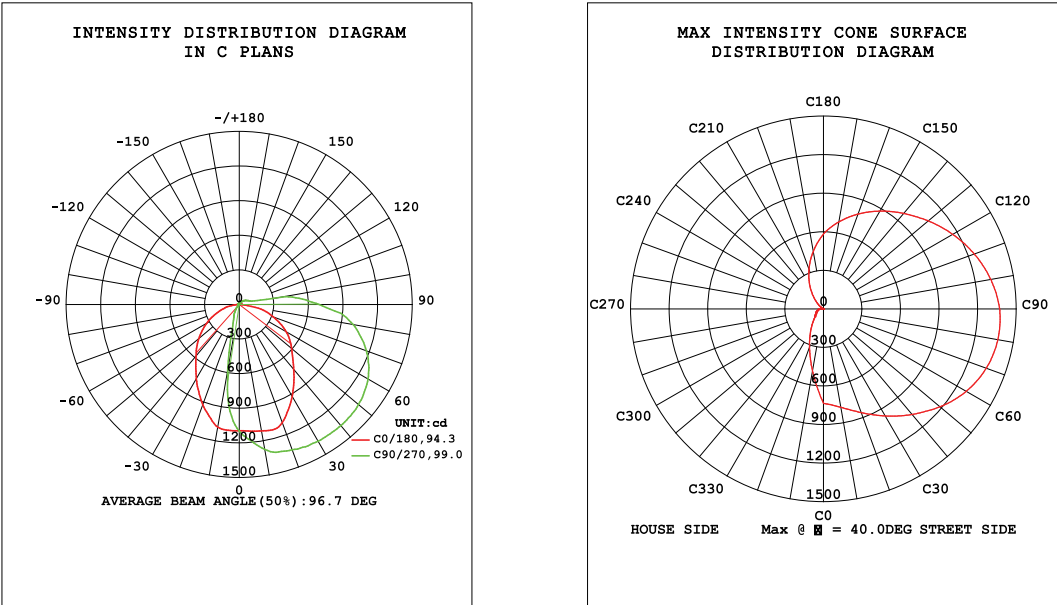

C Range: 0 - 360DEG  
C Interval: 45.0DEG  
Test Speed: HIGH  
Temperature: 27DEG  
Operators: lianghaizhu  
Test Date: 2024-05-14

Range: 0 - 180DEG  
Interval: 1.0DEG  
Test System: EVERFINE GO-2000A\_V1 SYSTEM V2.0.364  
Humidity: 56%  
Test Distance: 6.500m [K=1.0000]  
Remarks:

