



DECO® | LIGHTING


D407-LED

15" Decorative Round Luminaire



Job Information

Type:	
Catalog #:	
Project:	
Comments:	
Prepared by:	

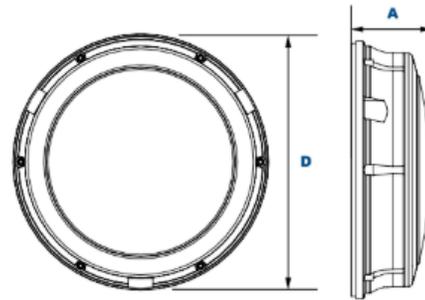

Dimensions	
Diameter (D)	12 1/4" (318mm)
Height (A)	3 15/16" (100mm)

Description

The 15" round decorative luminaire is designed for durability and performance to withstand today's toughest environments, including schools, parking garages, office complexes and any other application prone to vandalism. 150 lm/W

Ordering Information

Example: (D407-LED-25-50-UNV-W-O-BZ-WDF)



Series	Wattage/Lumen		Color Temp.		Voltage		Guard	Lens	Finish	Option
15" Decorative Round Luminaire	15	15W	30	3000K	UNV	120-277V	O	F	BZ	PC1
	20	20W	40	4000K	347	347V	C	Frosted	BL	Photozell (120-130 VAC)
	30	30W	50	5000K	480	480V (Step-Down Transformer used for 480V Divider)	E	Prismatic	WH	Photozell (208-277 VAC)
									CU	SP
										Surge Protection

¹ Standard for fixture
² Contact factory for custom finish
³ Delivered Lumens (with Open Guard).

Deco Lighting practices a program of continuous product development, and as a result product specifications change frequently. We reserve the right to change product specifications without notice. Contact Deco for the latest product information.

©2016 Deco Lighting, www.getdeco.com T: (800) 613-DECO F: (310) 366-6855
Rev Date: 7/18/16 #1

15" Decorative Round Luminaire

Features

- Mounts directly over a 4" recessed outlet box, or use a 1/2" surface conduit.
- Guards are available in three styles: Open, Cross and Eyelid.
- An extruded lens and foam backplate gasket are factory installed to cushion against shock. This also provides a seal against moisture, dirt and insects from entering the luminaire.
- Housing finish is textured polyester powder coating.
- Guards and housing are available in four finishes: White, Bronze, Black.
- The deep casting is provided with 1/2" threaded conduit coin plugs.
- UV stabilized heat and shock resistant borosilicate glass.
- Available in clear or frosted white, both with radial prisms to provide superior illumination.
- CSA listed for wet locations.


Performance Data

CRI:	85
CCT:	5000K
Warranty:	10 yr. Limited Warranty
Dimming:	Available with 0-10V inputs dimming down to 10%
Operating Temperature:	-40° to 40°C Max Ambient
L70 Rating:	100,000+ Hours
IP Rating:	IP65
Drive Current:	350mA
Sound Rating:	Class A (inaudible in a 24dB ambient environment)

Guard Options



← **Cross** →

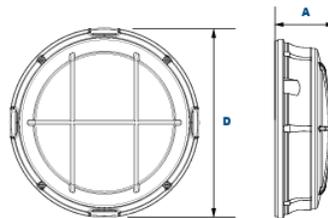


Dimensions

Diameter (D)	12½" (318mm)
Height (A)	4¾" (111mm)



← **Eyelid** →

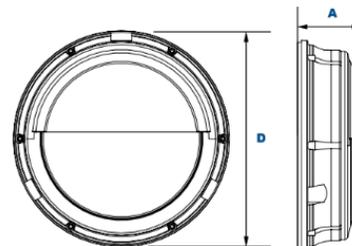

Dimensions

Diameter (D)	12½" (318mm)
Height (A)	4¾" (111mm)

LED Battery Backup



- Provides 90 mins of backup power.
- 100-277/50-60Hz Input Voltage
- Operation Temp Range: 0°-50°C
- Green LED Indicator for Stand-by Mode
- Optional Test Switch
- Short-Circuit, Overload, and No Load Protection
- Low Battery Shutdown to Protect Battery From Deep-Discharging
- RoHS Compliant