

DUNWP

UP/DOWN HALF MOON WALLPACK

The Half Moon Up/Down Wallpack is perfect for illuminating the perimeter of any commercial or industrial facility. This die-casting aluminum housing with corrosion resistant polyester powder coat finish. Standard with full cutoff design, optional for up light design. The series offers convenient operating features and superior lighting without flickering or humming. The UV stabilized polycarbonate lens is optically designed to enhance the light output effect of the lamp under the action of the interal reflector.

Client:	
Order#:	
Project:	
Type:	



FEATURES

- Field wattage and CCT selectable
- Die-Casting aluminum housing with corrosion resistant polyester powder coat finish
- Standard with full cutoff design, optional for up light design.
- UV stablized polycarbonate lens.
- Surge Protection: L-N:4KV, UN-PE:6KV
- Operating Temperature: -40 ° F to 122 ° F

PERFORMANCE DATA



Product ID	Wattage	Lumens	CCT	Voltage	Efficacy	Angel
D441-GEN2-MW60	30, 45, 60W (Selectable)	6000, 7500, 9000	3500K, 4000K, 5000K (Selectable)	120-277V	145	90°
D440-GEN2-MW100	60, 80, 100W (Selectable)	9000, 12000, 15000				

ORDERING INFORMATION


_____ / **GEN2** / _____ / _____ / _____
SERIES PHASE WATTAGE OPTIONS WARRANTY

FIXTURE SERIES	
D441	Deco Down Half Moon Wallpack Luminaire
D440	Deco Up/Down Half Moon Wallpack Luminaire
PHASE	
GEN2	Generation II: Multi Watt, Multi CCT
WATTAGE	
MW60	30, 45, 60W (selectable)
MW100	60, 80, 100W (selectable)

OPTIONS	
-	Bronze
W	White Coating
WARRANTY	
5	5 Year Warranty (included)
10	10 Year Warranty

Dimensions

10-inch

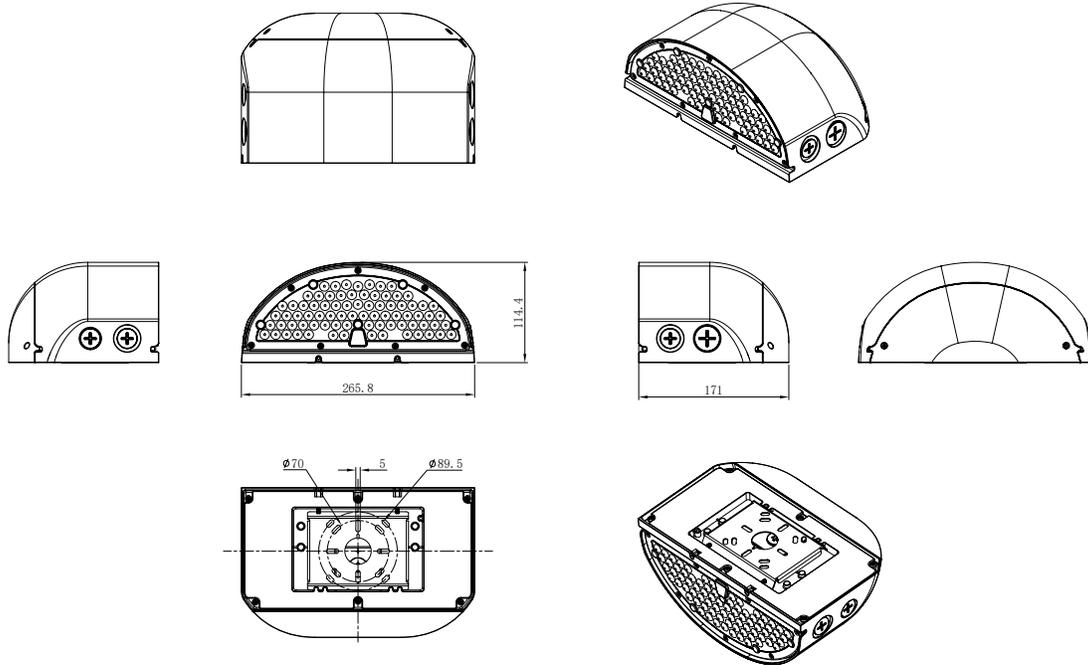

14-inch

